
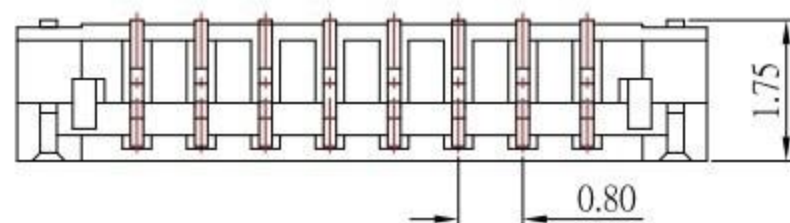


P.C.B LAYOUT MOUNTING PATTERN

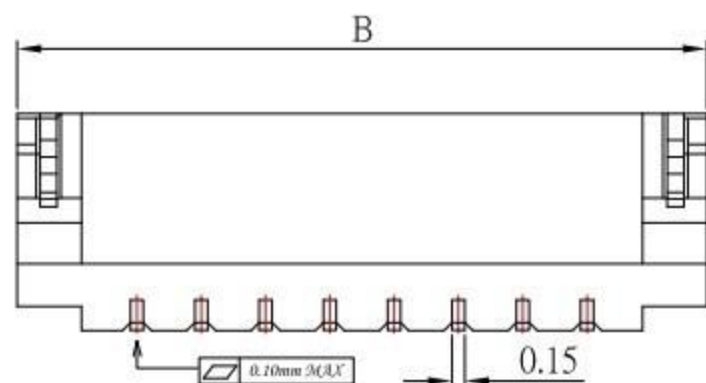

PIN	DIMENSION MM(IN)		
	A	B	C
2P	0.8	3.8	1.82
3P	1.6	4.6	2.62
4P	2.4	5.4	3.42
5P	3.2	6.2	4.22
6P	4.0	7.0	5.02
7P	4.8	7.8	5.82
8P	5.6	8.6	6.62
9P	6.4	9.4	7.42
10P	7.2	10.2	8.22
11P	8.0	11.0	9.02
12P	8.8	11.8	9.82
13P	9.6	12.6	10.62
14P	10.4	13.4	11.42
15P	11.2	14.2	12.22
16P	12.0	15.0	13.02
17P	12.8	15.8	13.82
18P	13.6	16.6	14.62
19P	14.4	17.4	15.42
20P	15.2	18.2	16.22

### SPECIFICATIONS

1. Current rating : 1.0A AC , DC
2. Voltage rating : 50V AC , DC
3. Temperature rating : -25°C ~ +85°C
4. Insulation resistance : 100MΩ min.
5. Withstand voltage : 250V AC / minute
6. Contact resistance : 20mΩ/Max

### Material:

1. Housing : LCP, UL94V-0
2. Contact : Phosphor Bronze, Tin or Gold Plated
3. Leg : Phosphor Bronze, Tin Plated over all Nickel

廣東科斯達電子科技有限公司

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 - 15	±0.3
Above 15 - 30	±0.4
Above 30 - 50	±0.5
Angle	±0.3

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	05/11/15	FINISH	MODLE	WAFER 0.8mm . SMT 90度
CHECKED BY:	DATE	SCALE	DWG NO.	SIZE
Jacky Chen	05/11/15	1 : 1		A4
APPROVED BY:	DATE	SHEET NO.	PART NO.	VER
Tony Kao	05/11/15	1 of 1		R

ITEM NO.	DESCRIPTION	DRAWN	DATE