


P.C.B LAYOUT MOUNTING PATTERN


SPECIFICATIONS

Current rating : 1.0A AC , DC  
 Voltage rating : 100V AC , DC  
 Temperature rating : -25°C ~ +85°C  
 Insulation resistance : 500MΩ min.  
 Withstand voltage : 500V AC/minute  
 Contact resistance : 20mΩ /Max  
 Material:  
 Housing : Nylon 6T, UL94V-0  
 Pin : Brass / Tin-plated  
 Contact : Phosphor Bronze

PART NO.	Dimensions	
	A	B
WF-1500VS02	1.50	4.30
WF-1500VS03	3.00	5.80
WF-1500VS04	4.50	7.30
WF-1500VS05	6.00	8.80
WF-1500VS06	7.50	10.30
WF-1500VS07	9.00	11.80
WF-1500VS08	10.50	13.30
WF-1500VS09	12.00	14.80

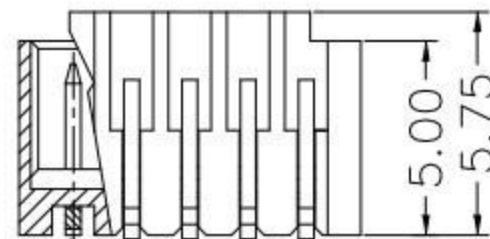

**Circuit 1**

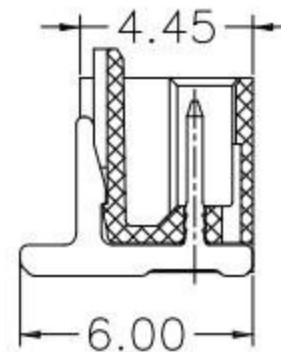

**廣東科斯達電子科技有限公司**

TOLERANCE UNLESS OTHERWISE STATED :  
 Up to 5 ±0.2  
 Above 5 - 15 ±0.3  
 Above 15 - 30 ±0.4  
 Above 30 - 50 ±0.5  
 Angle ±0.3

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	01/04/13	FINISH	MODLE	WAFER 1.5 SMT 180度
CHECKED BY:	DATE	SCALE	DWG NO.	SIZE
Jacky Chen	01/04/13	1 : 1		A4
APPROVED BY:	DATE	SHEET NO.	PART NO.	VER
Tony Kao	01/04/13	1 of 1		R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新圖面	Jack	01/04/13