


SCHEMATIC

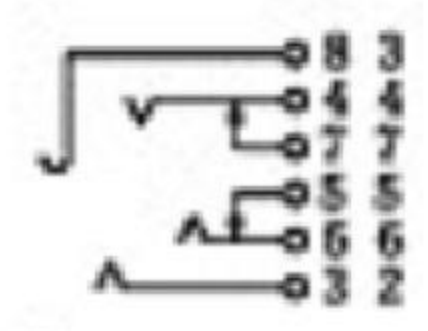

- SPECIFICATION**
1. Rating : DC 30V 0.5A;
 2. Contact resistance, $\leq 50m\Omega$;
 3. Insulation resistance, $\geq 100M\Omega$ (DC250V);
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 3-25N;
 6. life test: 5,000 cycles.

PJ-328C	PJ-328C-1	PJ-328C-2	PJ-328C-3	PJ-328C-4	PJ3028C-5

					ANGLAR	$\pm 5^\circ$	DSND		DATE		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK			
					X.X	$\pm 0.2mm$	DWN		DATE		VIEW:	PART NO.:			
					X.XX	$\pm 0.1mm$	CHKD		DATE		UNIT: mm	DWG NO.:			
					X.XXX	$\pm 0.05mm$	APPD		DATE		SIZE: A4				
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES			廣東科斯達電子科技有限公司					WEIGHT	SHEET	REVISION
REVISIONS													1.0g	1/1	A0