




P.C.B LAYOUT
TOP VIEW

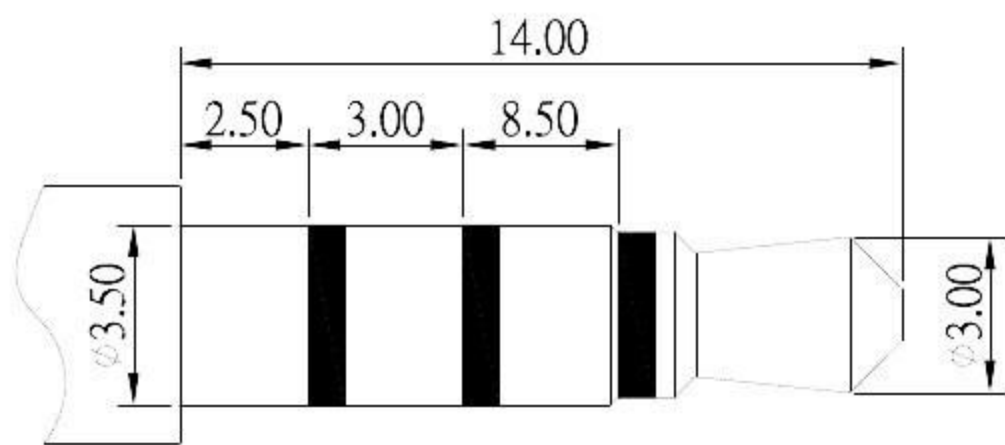

Ø3.50mm 4 POLE PLUG

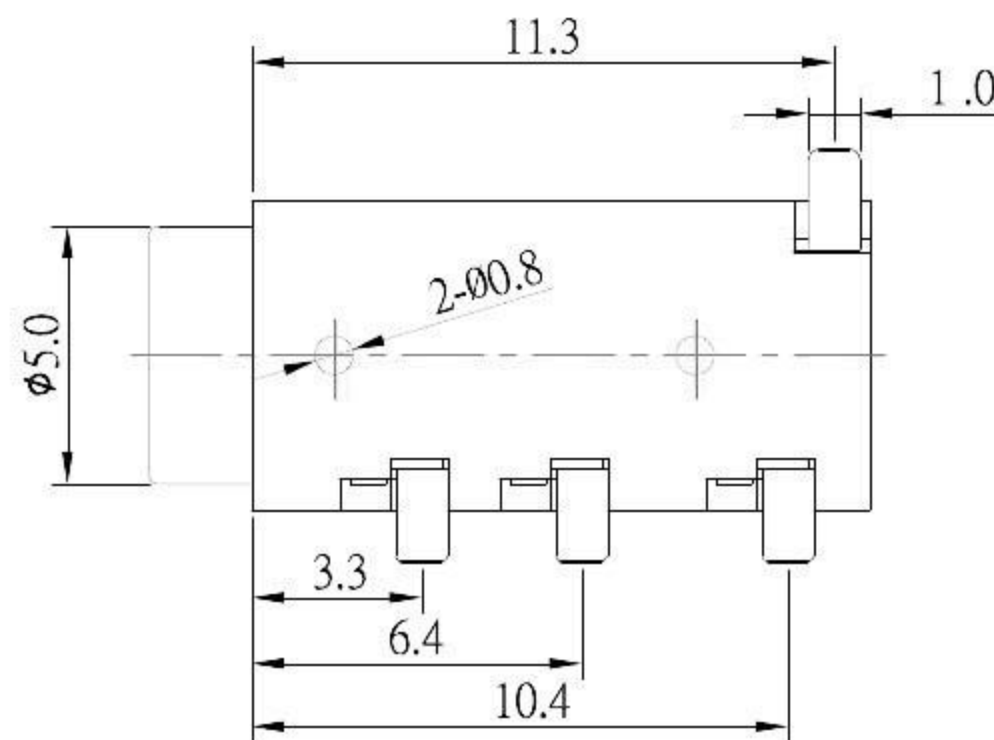

SCHEMATIC



SPECIFICATIONS

1. Rating : DC 30V 0.5A ;
2. Contact resistance : $\leq 30m\Omega$;
3. Insulation resistance : $\geq 100M\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N;
6. life test : 5,000 cycles °

R:red	G:green
Y:yellow	B:black
W:white	T:transparent

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
5	HOUSING	1	PPA	
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	3#CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating

DSND	DATE	SCALE: N/A	MODEL TYPE: 3.5 SMT PHONE JACK
DWN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm	DWG NO.:
APPD	DATE	SIZE: A4	

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
△ X					units: mm
△ X					tolerance:
△ X					X.X ±0.2mm
					X.XX ±0.1mm
					X.XXX ±0.05mm

REVISIONS			UNSPECIFIED TOLERANCES			廣東科斯達電子科技有限公司			WEIGHT 1.0g	SHEET 1/1	REVISION A0
-----------	--	--	------------------------	--	--	---------------	--	--	----------------	--------------	----------------