

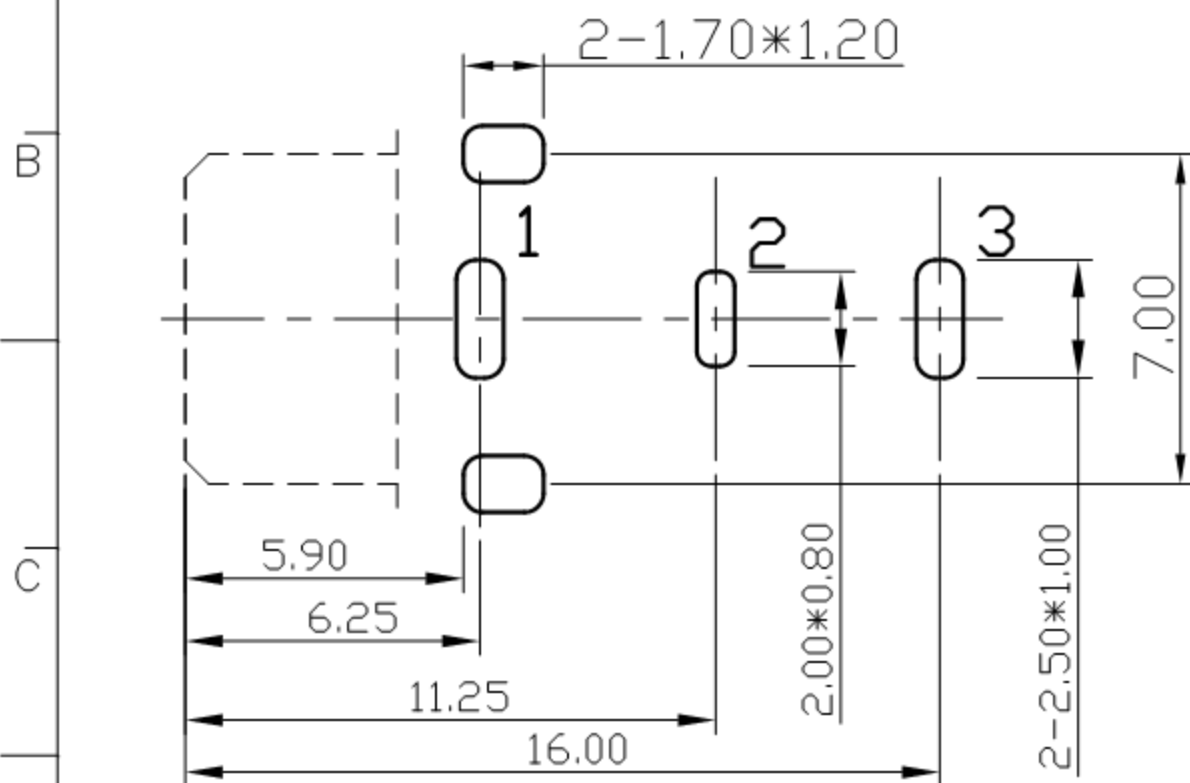


SCHEMATIC	
MODEL NO	X

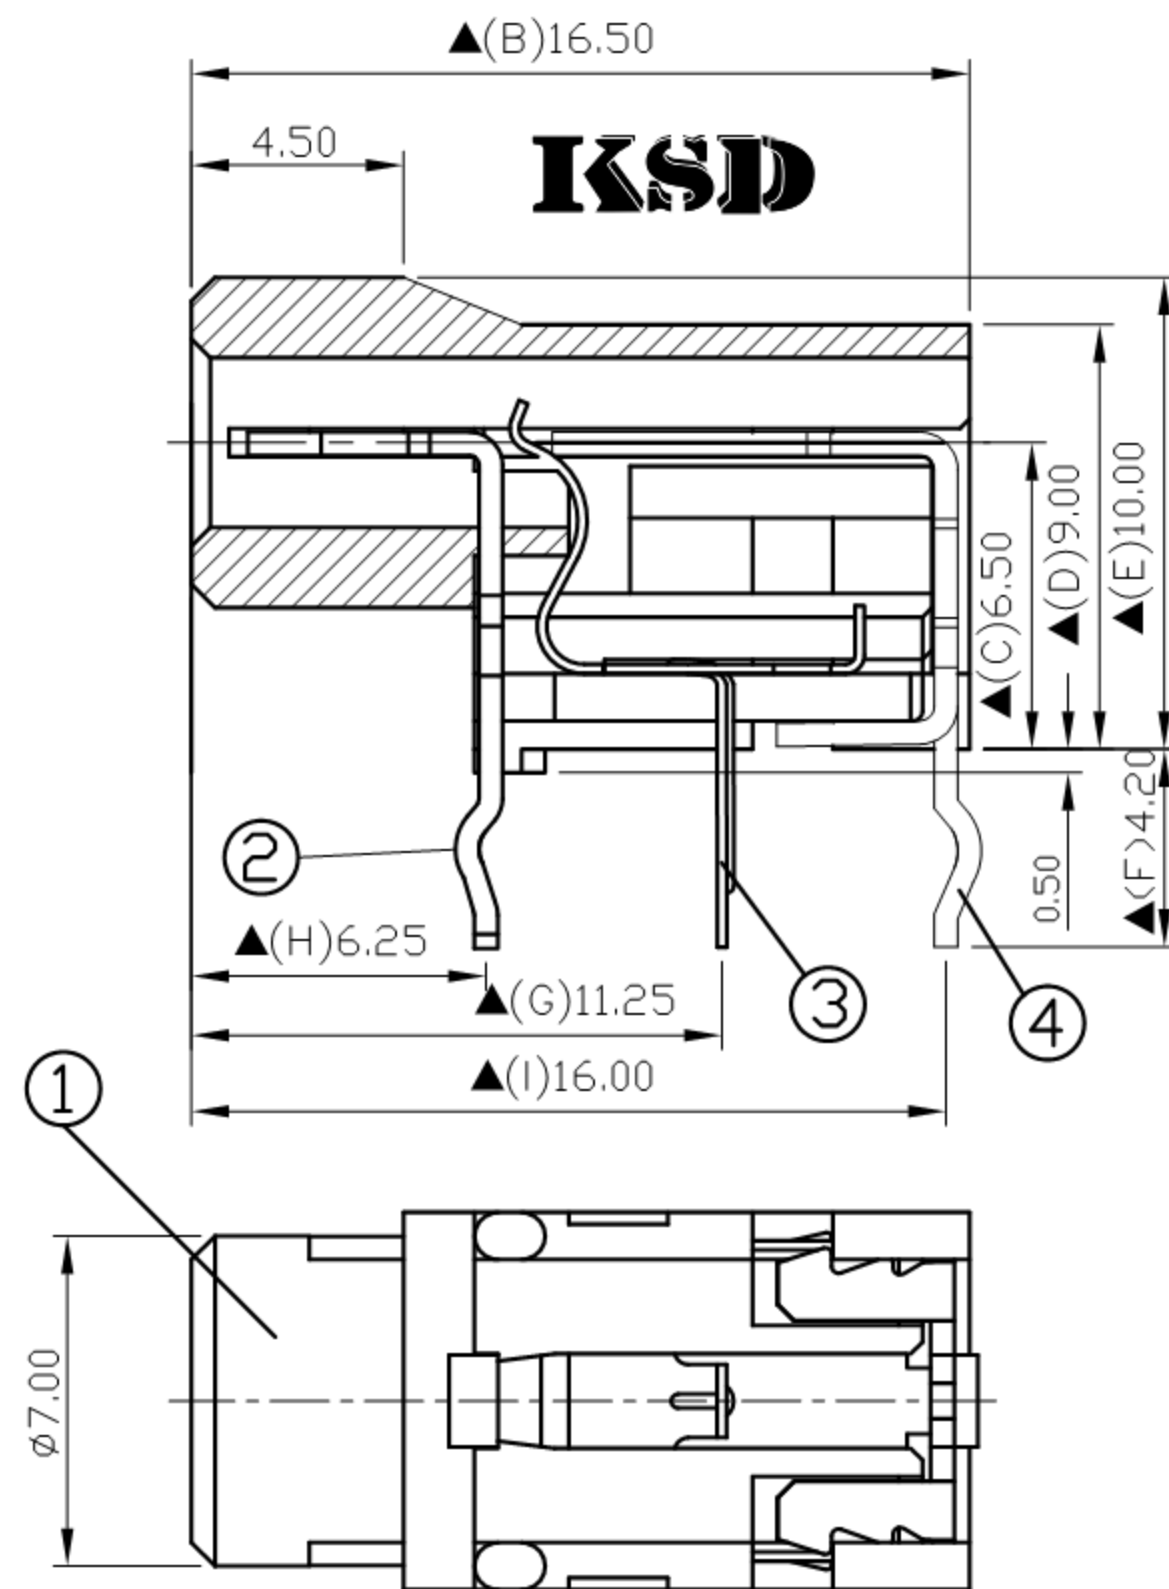

Pin Hole Layout  
Jack Bottom View

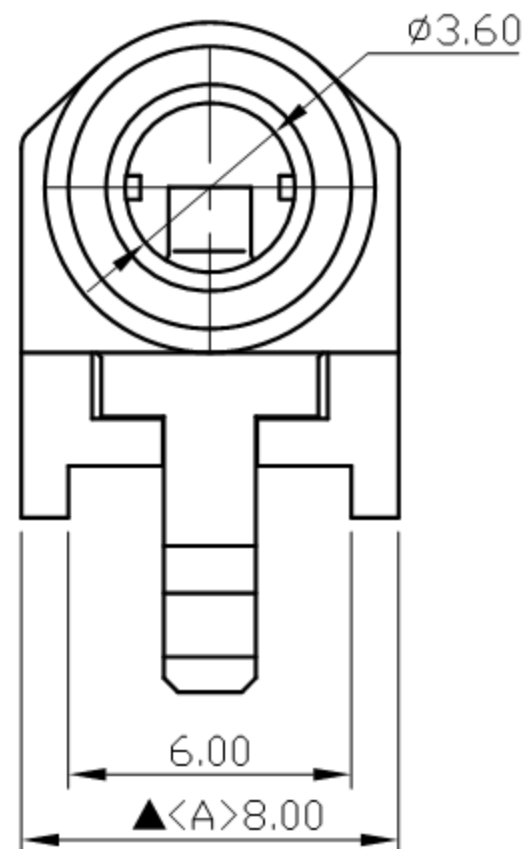

4.	Ring Spring	0.5 Brass	1	Silver Plated
3.	Tip Spring	0.2 Phosphor Bronze	1	Silver Plated
2.	Sleeve Spring	0.5 Brass	1	Silver Plated
1.	Housing	PBT	1	Black Color
NO.	Description	Material	Q'TY	Finish

	广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
		08.19.2020	王平華			

PART NAME: 3.5 $\phi$ PHONE JACK	PART NUMBER : SCJ337P00XS0B00G	VERSION:7.0
TOLERANCE : $\pm 0.3$ mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

SPECIFICATIONS:  
 Contact Resistance : 30m $\Omega$  max  
 Insulation Resistance : 100M $\Omega$  min. at DC 500V  
 Dielectric Withstanding Voltage: AC 500V for one minute  
 Remark:  $\blacktriangle$ : The Most Important Dimension

For Reference  
僅供參攷

RoHS&SVHC  
Compliant