


6.	NUT	Low lead Brass Rod	1	Nickel Plated
5.	Housing	POM	1	Black Color
4.	Barrel	Low lead Brass Rod	1	Nickel Plated
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Tip Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

	<b>广东科斯达电子科技有限公司</b> GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.				
	DATE	DWN	CHKD	APVD	MANAGER
	09.03.2020	王平華			

PART NAME : 3.5 $\phi$ PHONE JACK	PART NUMBER: SCJ324M1NYS1B00L	VERSION: 1.0
TOLERANCE : $\pm 0.3$ mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: 1/1

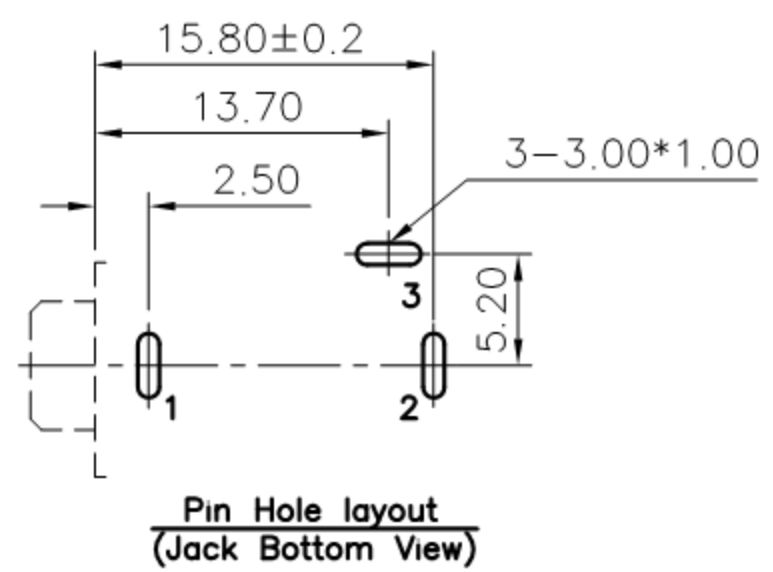

**SPECIFICATIONS:**  
 Contact Resistance : 30m $\Omega$  max  
 Insulation Resistance : 100M $\Omega$  min. at DC 500V  
 Dielectric Withstanding Voltage: AC 500V for one minute  
 Remark:  $\blacktriangle$ : The Most Important Dimension

For Reference  
 備供參攷

**RoHS&SVHC  
 Compliant**