

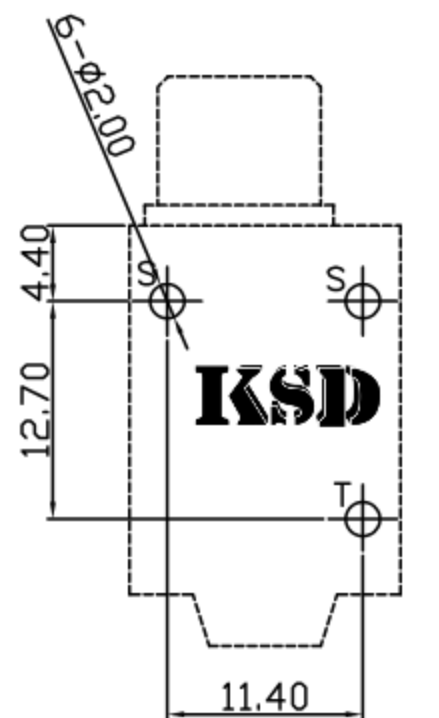



"A" Detail

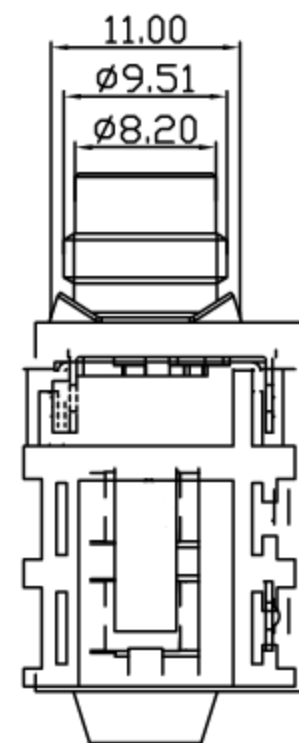

Pin Hole Layout
(Jack Bottom View)

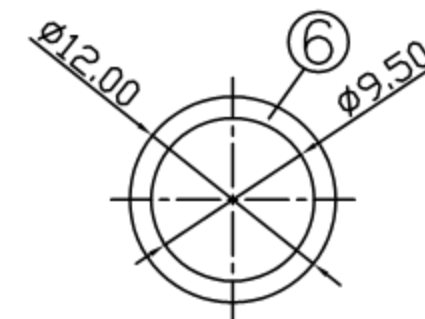

WASHER



NUT

7.	Nut	2.2T Brass	1	Nickel Plated
6.	Washer	0.4T Brass	1	Nickel Plated
5.	Earth Spring	0.3T Steel	1	Nickel Plated
4.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
3.	Sleeve Shunt	0.4T Bronze	1	Silver Plated
2.	Barrel	Brass	1	Nickel Plated
1.	Housing	PA66	1	Black Color

NO.	Description	Material	Q'TY	Finish
-----	-------------	----------	------	--------

广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
11.01.2012				

PART NAME : 6.3 ϕ PHONE JACK	PART NUMBER: SCJ635M6NAS4BP0G	VERSION: 1.0
-----------------------------------	-------------------------------	--------------

TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: /
---	----------	----------

SPECIFICATIONS:
 Contact Resistance : 30m Ω max
 Insulation Resistance : 100M Ω min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲ : The Most Important Dimension

RoHS
Pb Free Process

For Reference
僅供參考