
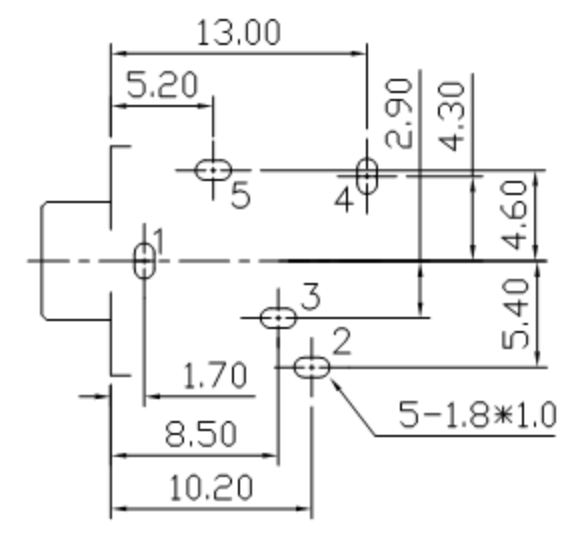


9.	Spring	SUS-304	1	
8.	Cover	PC	1	Trans Parent
7.	Housing	POM	1	Black Color
6.	Barrel(W/O Thread)	Low lead Brass Rod	1	Nickel plated
5.	Tip Spring	0.25T Phosphor Bronze	1	Silver Plated
4.	Break Terminal	0.4T Brass	1	Silver Plated
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

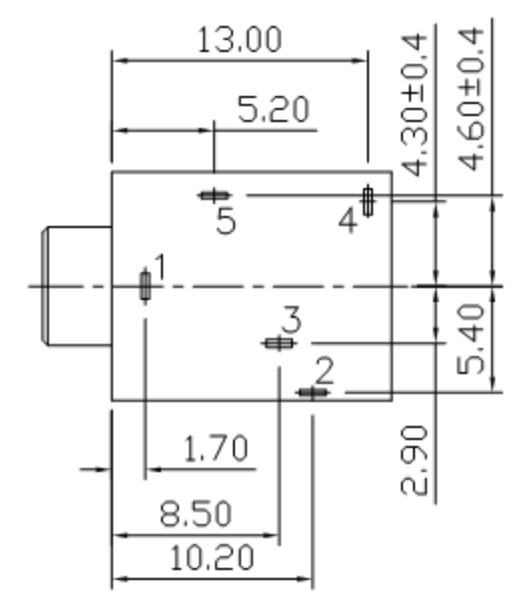

Pin Hole Layout  
(Jack Bottom View)

	<b>广东科斯达电子科技有限公司</b> GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.					DATE	DWN	CHKD	APVD	MANAGER
						09.11.2020	王平華			

PART NAME : 3.5∅ PHONE JACK		PART NUMBER: SCJ354MONUS0B00L			VERSION:1.0	
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED				UNIT:mm		SCALE:1/1

SPECIFICATIONS:  
 Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstanding Voltage: AC 500V for one minute  
 Remark: ▲: The Most Important Dimension

For Reference  
備供參攷

RoHS&SVHC  
Compliant