


SCALE:(1: 2)

18.	Insulator	PA66+33%	1	Black Color
17.	Sequins	Tin phosphor bronze	2	
16.	Spring	SUS-304	1	
15.	Metal Shell	0.2T Brass	1	Silver Plated
14.	Back Housing Cover	PA66+33%	1	Transparent
13.	Back Housing	PA66+33%	1	Black Color
12.	Housing	PBT	1	Black Color
11.	Switch Pin	0.4T Brass	6	Silver Plated
10.	Tip Lead(TOP)	0.4T Brass	1	Silver Plated
9.	Tip Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
8.	Ring Lead(TOP)	0.4T Brass	1	Silver Plated
7.	Ring Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
6.	Earth Terminal(TOP)	0.4T Phosphor Copper	1	Silver Plated
5.	Tip Spring(DOWN)	0.25T Phosphor Copper	1	Silver Plated
4.	Break Terminal(DOWN)	0.4T Bronze	1	Silver Plated
3.	Break Terminal(DOWN)	0.4T Bronze	1	Silver Plated
2.	Ring Spring(DOWN)	0.3T Phosphor Copper	1	Silver Plated
1.	Earth Terminal(DOWN)	0.4T Phosphor Copper	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

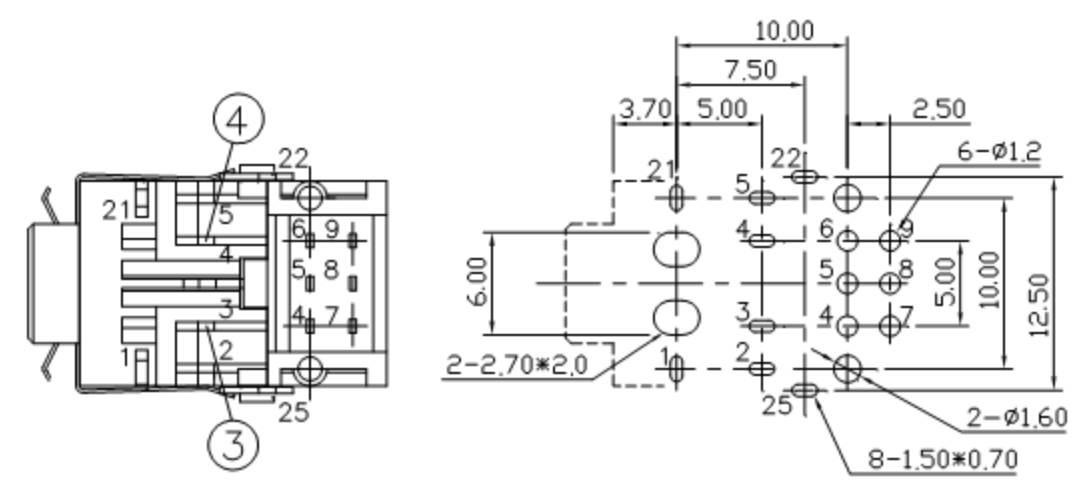

Pin Hole Layout
(Jack Bottom View)

	广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
		09.27.2020	王平華			

PART NAME : 3.5φ PHONE JACK	PART NUMBER : SCJ352P00US0BNSG	VERSION:6.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲ : The Most Important Dimension

For Reference
備供參攷

RoHS&SVHC
Compliant