


Pin Hole Layout
(Jack Bottom View)

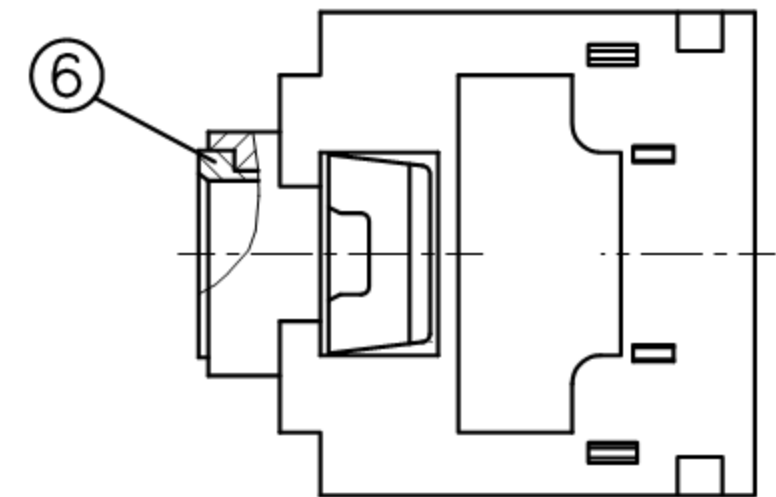

7	Housing	PBT	1	Black Color
6	Barrel	Brass	1	Nickel Plated
5	Tip Spring	0.25T TicuR1-M-EH	1	Silver Plated
4	Break Terminal	0.3T Brass	1	Silver Plated
3	Break Terminal	0.3T Brass	1	Silver Plated
2	Ring Spring	0.2T TicuR1-M-EH	1	Silver Plated
1	Earth Terminal	0.2T Phosphor Bronze	1	Silver Plated

NO.	Description	Material	Q'TY	Finish
-----	-------------	----------	------	--------

广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
10.10.2011				

PART NAME : 3.5 ϕ Phone JACK PART NUMBER: SCJ355RONUS0B00G VERSION:4.0

TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED UNIT: mm SCALE: 1/1

SPECIFICATIONS:
 Contact Resistance : 30m Ω max
 Insulation Resistance : 100M Ω min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: \blacktriangle : The Most Important Dimension

RoHS Compliant For Reference 僅供參考