
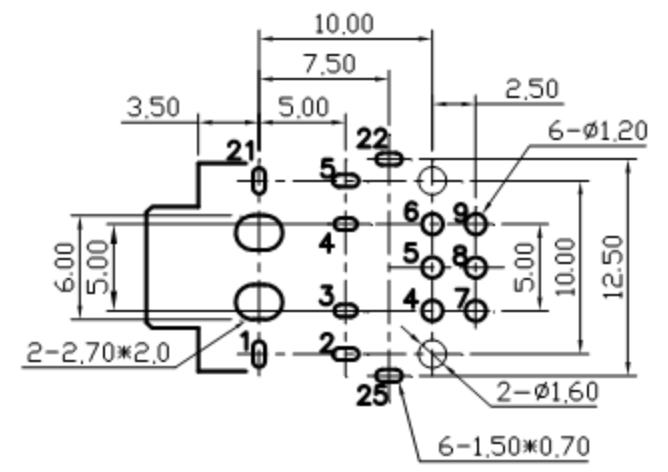


NO.	Description	Material	Q'TY	Finish
21	Spring	SUS-304	1	
20	Sequins	Tin phosphor bronze	2	
19	Break Terminal(DOWN)	0.4T Bronze	1	Silver Plated
18	Ring Spring(DOWN)	0.3T Phosphor Copper	1	Silver Plated
17	Back Housing Cover	PA66+33%	1	Transparent
16	Back Housing	PA66+33%	1	Black Color
15	Switch Pin	0.4T Brass	6	Silver Plated
14	Bushing(TOP)	PBT	1	577C Green Color
13	Bushing(DOWN)	PBT	1	701C Pink Color
12	Sleeve(Barrel)	Low lead Brass Rod	2	Nickel Plated
11	Metal Shell	0.2T Phosphor Copper	1	Silver Plated
10	Insulator	PA66+33%	1	Black Color
9	Housing	PBT	1	Black Color
8	Tip Lead(TOP)	0.4T Brass	1	Silver Plated
7	Tip Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
6	Ring Lead(TOP)	0.4T Brass	1	Silver Plated
5	Ring Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
4	Earth Terminal(TOP)	0.4T Phosphor Copper	1	Silver Plated
3	Tip Spring(DOWN)	0.25T Phosphor Copper	1	Silver Plated
2	Ring Spring(DOWN)	0.3T Phosphor Copper	1	Silver Plated
1	Earth Terminal(DOWN)	0.4T Phosphor Copper	1	Silver Plated

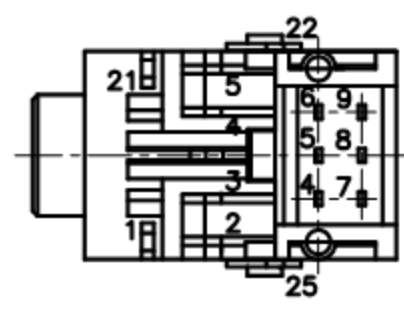

Pin Hole Layout
(Jack Bottom View)

	广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
		09.27.2020	王平華			

PART NAME : 3.5φ PHONE JACK	PART NUMBER : SCJ352M5NUSGPN4L	VERSION: 1.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED		SCALE: 1/1

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲ : The Most Important Dimension

For Reference
 備供參攷

**RoHS&SVHC
 Compliant**