


10.	Spring T	0.40T Phosphor Bronze	3	Silver Plated
9.	Terminal T	0.4T Brass	3	Silver Plated
8.	Terminal D	0.3T Brass	3	Silver Plated
7.	Spring D	0.35T Phosphor Bronze	3	Silver Plated
6.	Earth Terminal R	0.4T Brass	1	Nickel Plated
5.	Earth Terminal L	0.4T Brass	1	Nickel Plated
4.	Insulator R	PBT	2	Green Color
3.	Insulator C	PBT	2	Blue Color
2.	Insulator L	PBT	2	Red Color
1.	Housing	PA66+33%GF	1	Black Color
NO.	Description	Material	Q'TY	Finish

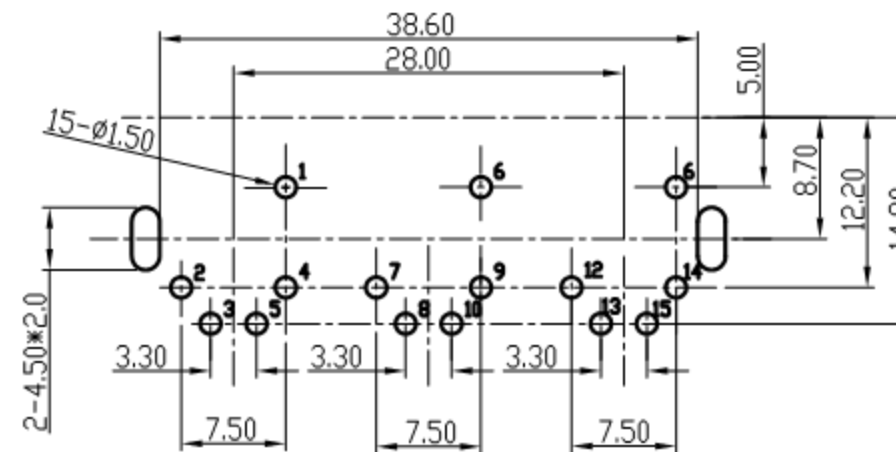

Pin Hole Layout
(Jack Bottom View)

	广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
		09.21.2006				

PART NAME : PIN JACK	PART NUMBER:SCP672VNS225577G	VERSION:1.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲ : The Most Important Dimension

RoHS
Pb Free Process
For Reference
僅供參考