
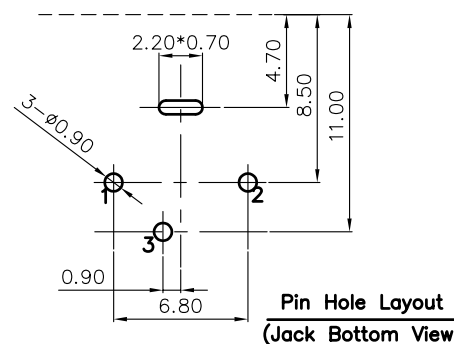


Arrangement of Contact

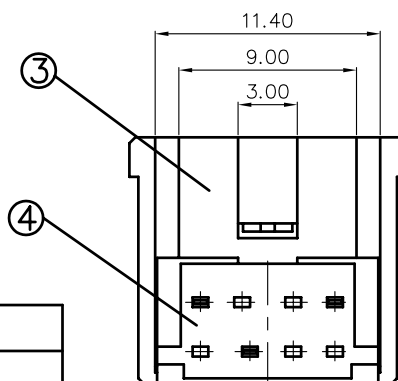

Pin Hole Layout
(Jack Bottom View)

4.	Cover	PBT UL 94 V-0	1	Black Color
3.	Housing	PBT UL 94 V-0	1	Black Color
2.	Terminal	0.2T Phosphor Bronze	3	Gold Flash Plated Contact & Terminal Plated With Tin Over 50u*(Min.) Nickel
1.	Inner Shield	0.35T Brass	1	Nickel Plating
NO.	Description	Material	Q'TY	Finish

广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	10.19.2011				

PART NAME :DIN JACK	PART NUMBER:SCN551S3GTNB000G	VERSION:3.0
---------------------	------------------------------	-------------

TOLERANCE:±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1
---	---------	-----------

SPECIFICATIONS:
 Contact Resistance :30mΩ max
 Insulation Resistance :100MΩ min.at DC500V
 Dielectric Withstand Voltage:AC 500V for one minute
 Remark:▲:The Most Important Dimension

RoHS Compliant
 For Reference
 僅供參考