


A部詳圖: (塑柱: 2/1)

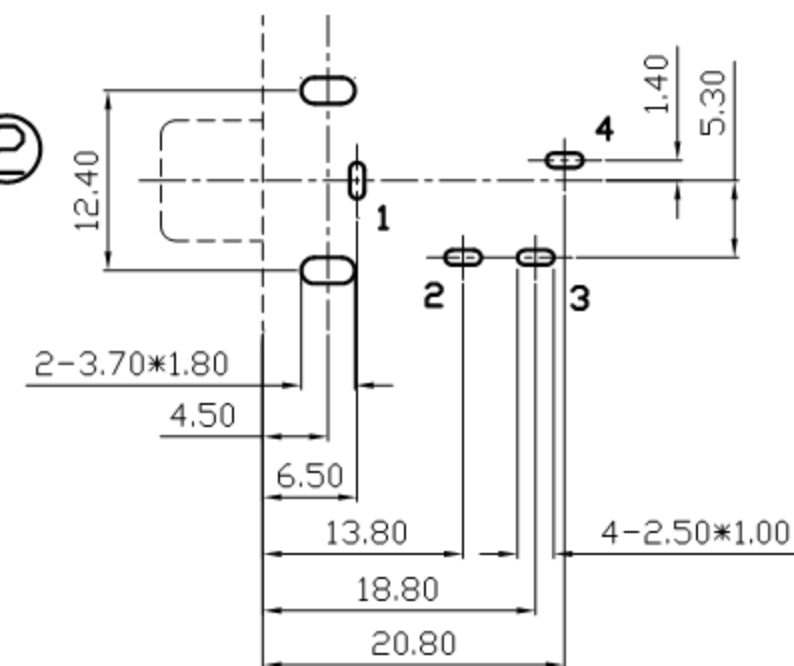

Pin Hole Layout
(Jack Bottom View)

10.	Housing D	PBT	1	Black Color
9.	Housing C	PBT	1	Red Color
8.	Housing T	PBT	1	White Color
7.	Base	ABS	1	Black Color
6.	Earth Terminal	0.2T Phosphor Bronze	1	Silver Plated
5.	Barrel	0.5T Brass	3	Nickel Plated
4.	Terminal T	0.5T Brass	1	Silver Plated
3.	Terminal C	0.5T Brass	1	Silver Plated
2.	Terminal D	0.5T Brass	1	Silver Plated
1.	Earth Terminal D	0.5T Brass	1	Nickel Plated
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD	APVD	MANAGER
10.21.2008				

广东科斯达电子科技有限公司
 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

PART NAME : PIN JACK

PART NUMBER : SCP643CNS321000G

VERSION:1.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm

SCALE:1/1

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考