
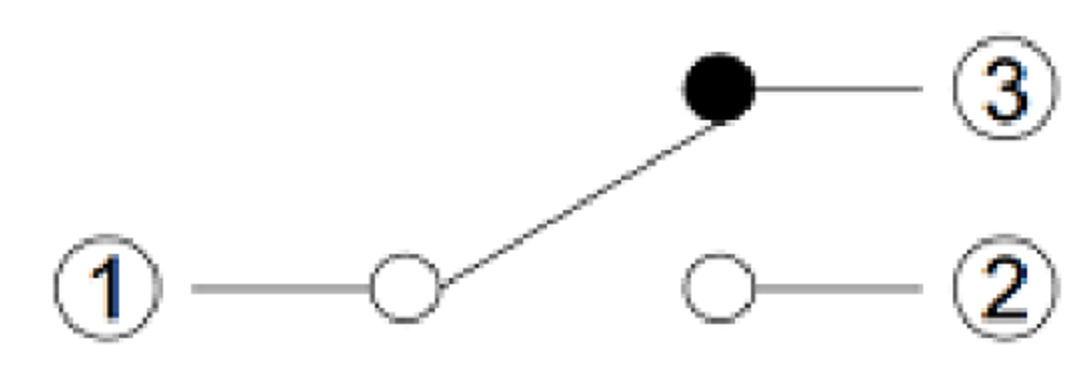


P.C.B LAYOUT MOUNTING

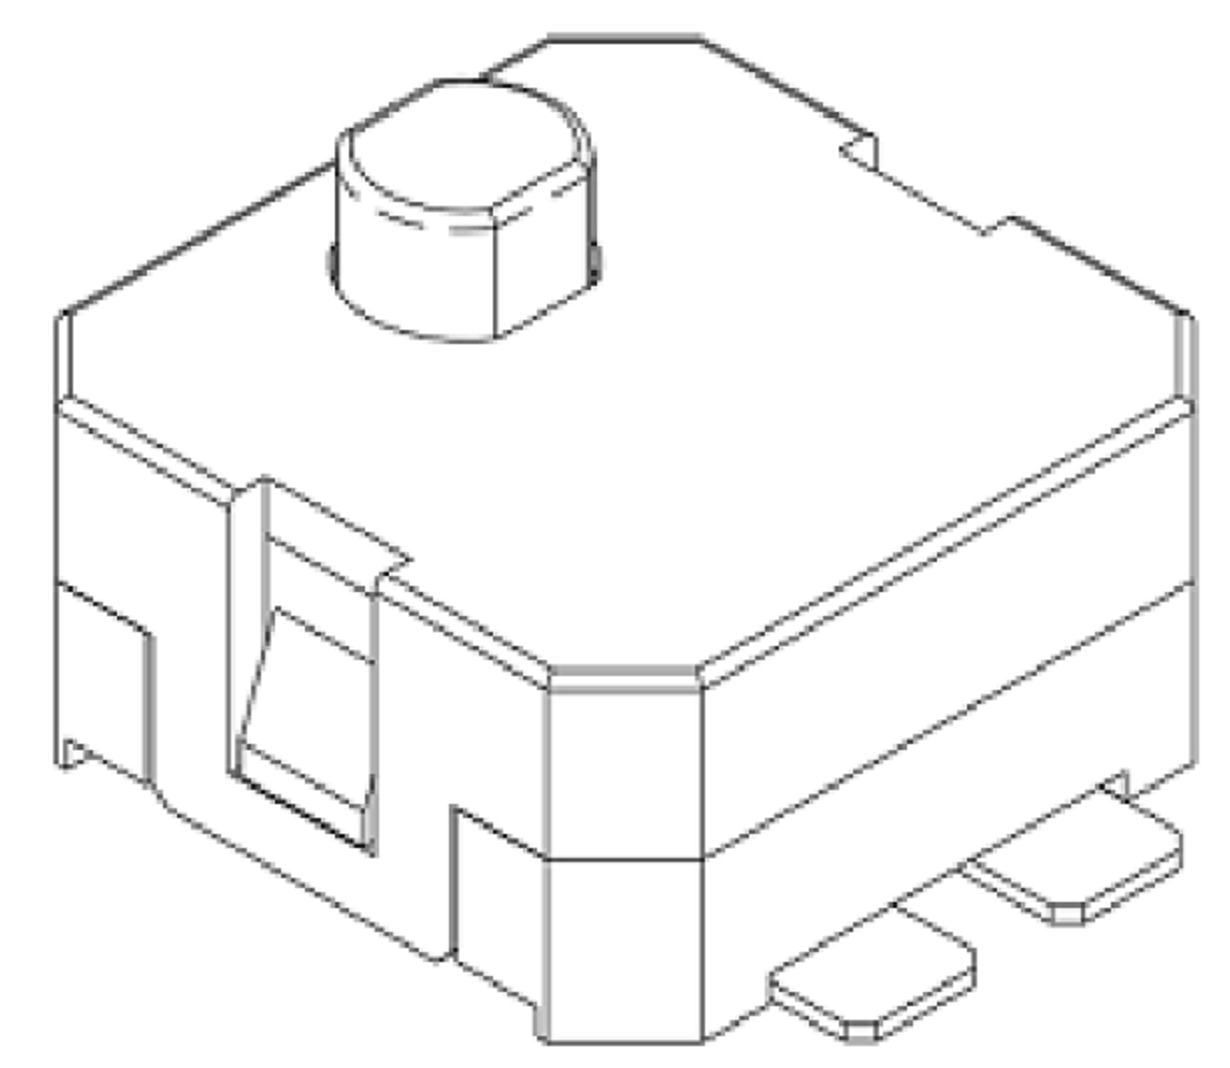

CIRCUIT DIAGRAM

NOTES:

- 1.RATING: □ 5(3)A 125 / 250VAC
□ 10.5A 125 / 250VAC
- 2.CONTACT RESISTANCE: 50mΩ Max (Initial).
- 3.INSULATION RESISTANCE: 100MΩ 500VDC FOR 1MIN
- 4.DIELECTRIC STRENGTH: 500VAC(50/60Hz) FOR 1MIN
- 5.ELECTRICALLY LIFE: 10,000 CYCLES MIN
- 6.OPERATION FORCE: 250±100g .
- 7.SWITCH ON TRAVEL: 0.5±0.2 mm
- 8.TOTAL TRAVEL: 0.80mm MAX.
- 9.OPERATING TEMPERATURE RANGE: -25°C~+85°C



TOLERANCE UNLESS OTHERWISE STATED: Up to 5 ±0.2, Above 5 ~ 15 ±0.3, Above 15 ~ 30 ±0.4, Above 30 ~ 50 ±0.5, Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	12/10/15			
CHECKED BY:	DATE	FINISH	MODLE	MICRO SWITCH
Jacky Chen	12/10/15			
APPROVED BY:	DATE	SCALE	DWG NO.	SIZE
Tony Kao	12/10/15	1 : 1		A4
		SHEET NO.	PART NO.	VER
		1 of 1		R1

1	更新Electrical Life	Jack	121015
ITEM NO.	DESCRIPTION	DRAWN	DATE