
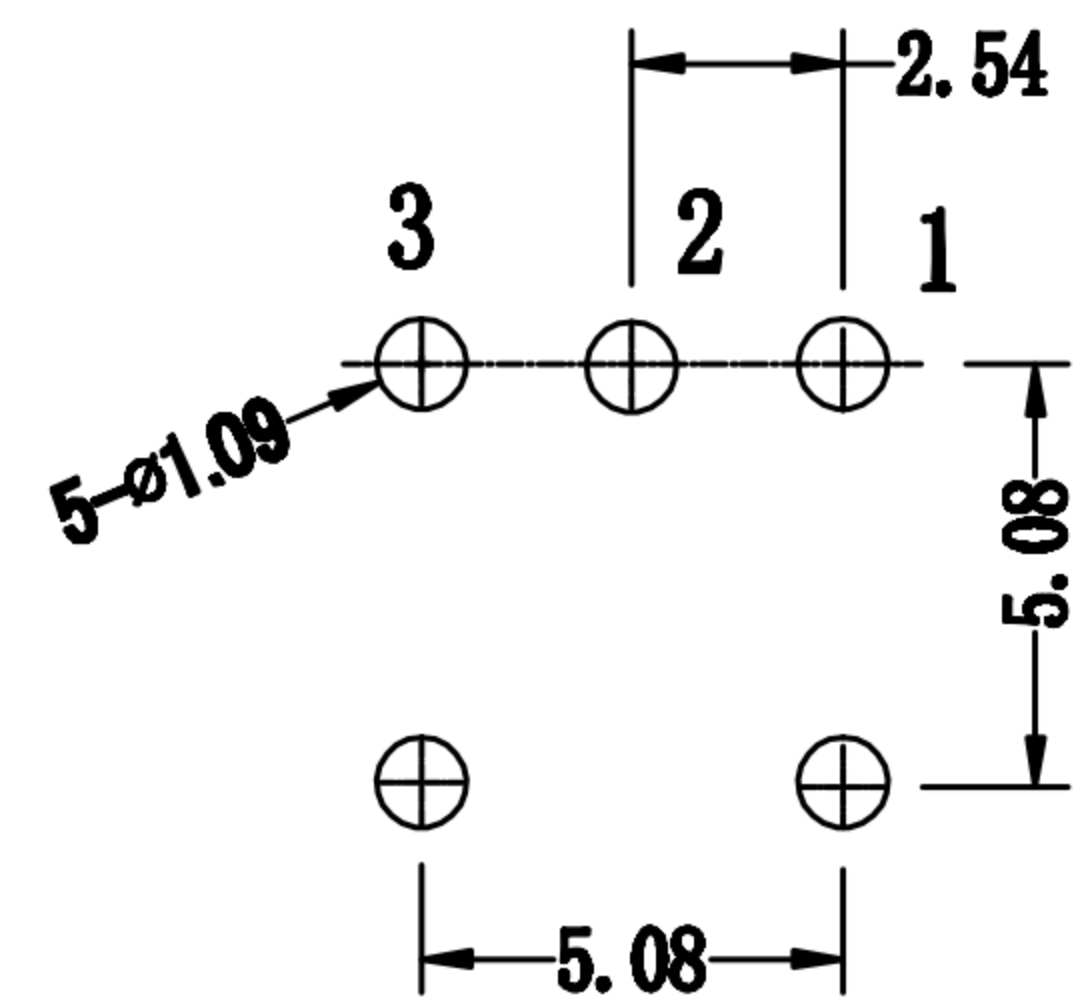
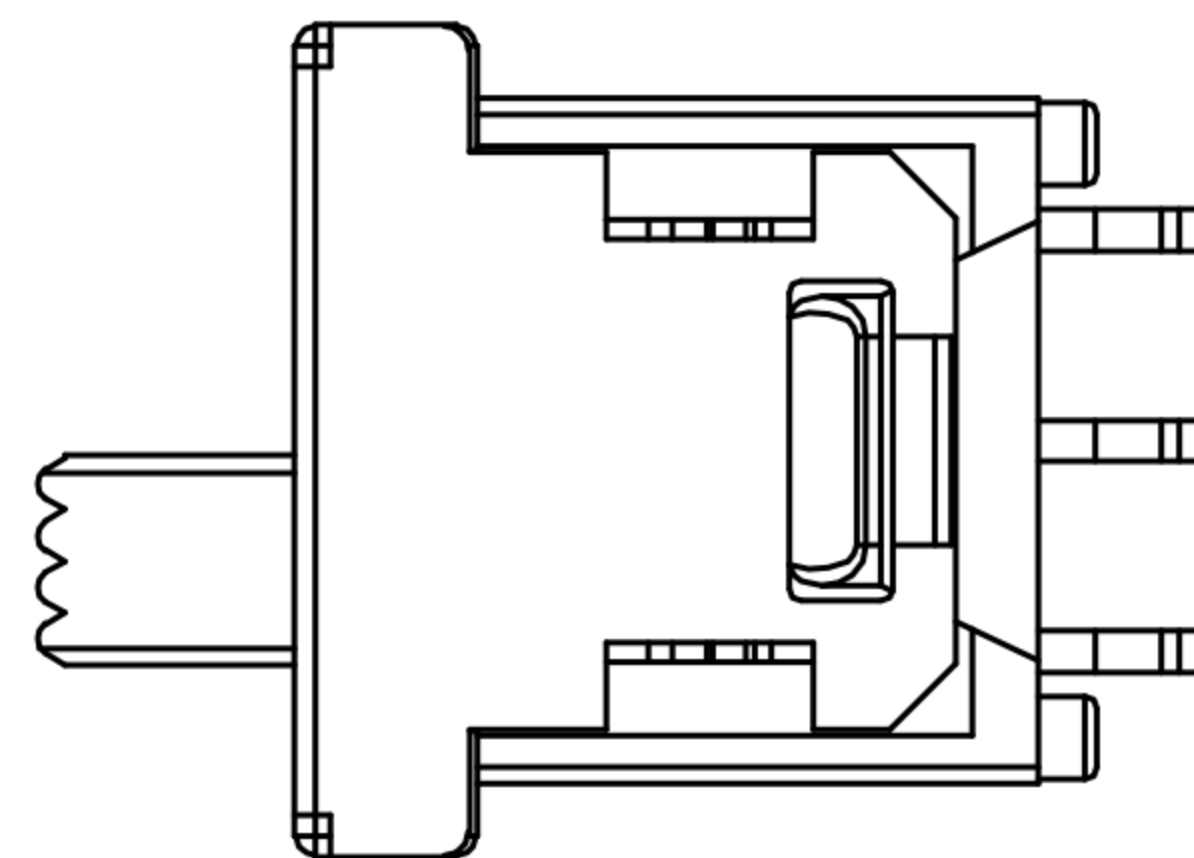


Model NO.	SWITCH FUNCTION		
	POS. 1	POS. 2	POS. 3
SS1-102	ON	NONE	ON
CONN. TERMINALS	2-3	N/A	2-1
SCHEMATIC SPDT			

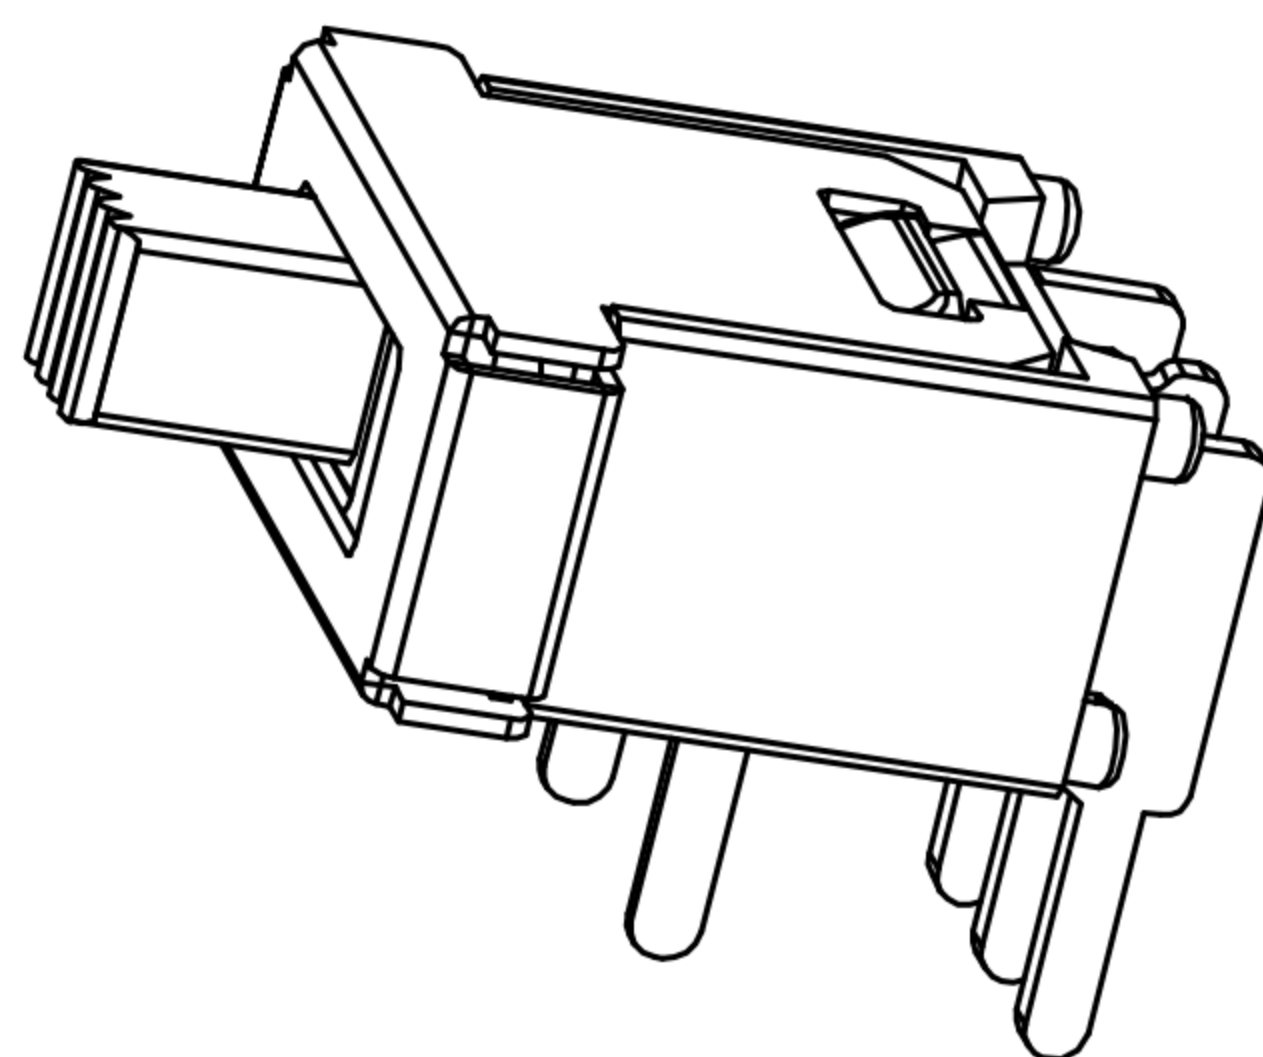

PC MOUNTING

Materials

- BASE: PPA (UL 94V-0).
- HOUSING: Stainless steel with tin plate.
- CONTACT/TERMINALS: Copper alloy silver plated.
- TERMINAL SEAL: Epoxy.

Specifications

- CONTACT RATING: 0.4 VA max. @ 20 V AC or DC max.
- MECHANICAL & ELECTRICAL LIFE: 30,000 make-and-break cycles at full load.
- CONTACT RESISTANCE: 20 m Ω max. initial @ 2-4 V DC, 100 mA.
- INSULATION RESISTANCE: 1000 MΩ min.
- DIELECTRIC STRENGTH: 500 Vrms min.
- OPERATING TEMPERATURE: -30°C to 85°C.



TOLERANCE UNLESS OTHERWISE STATED: Up to 5 ±0.2, Above 5 ~ 15 ±0.3, Above 15 ~ 30 ±0.4, Above 30 ~ 50 ±0.5, Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	04/13/16		MODLE	SLIDE SWITCH
CHECKED BY:	DATE	FINISH	DWG NO.	SIZE
Jacky Chen	04/13/16		PART NO.	A4
APPROVED BY:	DATE	SCALE	1 of 1	VER
Tony Kao	04/13/16	SHEET NO.		R2