
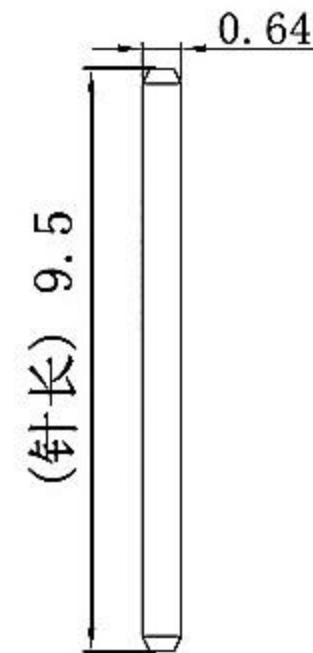


SPECIFICATIONS

Current rating : 2.0A AC , DC
 Voltage rating : 100V AC , DC
 Temperature rating : -25°C ~ +85°C
 Insulation resistance : 1,000MΩ min.
 Withstand voltage : 800V AC/minute
 Contact resistance : 20mΩ/Max
 Material:
 Housing : Nylon 66, UL94V-2
 Pin : Brass / Tin-plated
 Contact : Phosphor Bronze

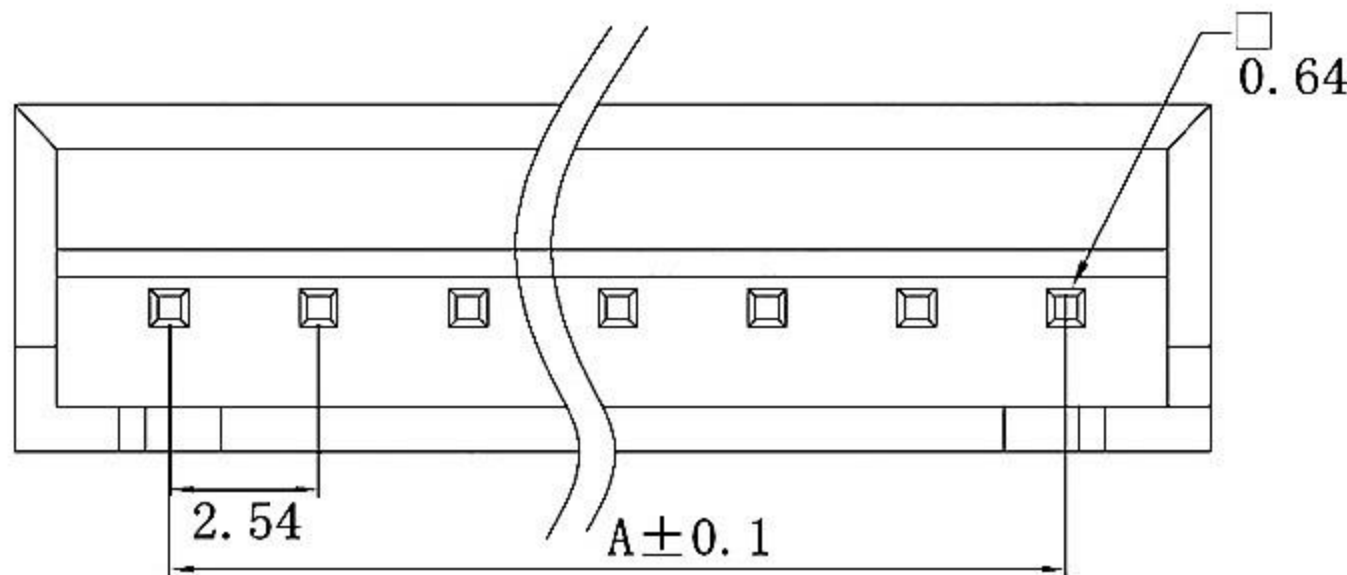

(铜针例图)

				DRAWN BY: Jack Lu		DATE: 11/13/12	MAT'L	TITLE	CONNECTOR
				CHECKED BY: Jacky Chen		DATE: 11/13/12	FINISH	MODLE	
				APPROVED BY: Tony Kao		DATE: 11/13/12	SCALE: 1:1	DWG NO.	
ITEM NO.	DESCRIPTION	DRAWN	DATE	TOLERANCE UNLESS OTHERWISE STATED:		3RD. ANGEL'S	UNITS	MM	SIZE
				Up to 5	±0.2				A4
				Above 5 - 15	±0.3				VER
				Above 15 - 30	±0.4				R
				Above 30 - 50	±0.5				
				Angle	±0.3				