
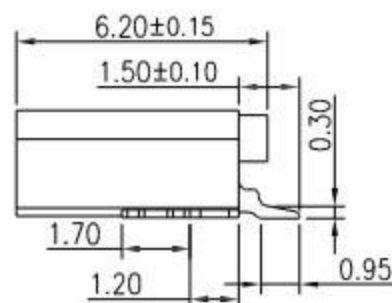





APPLICABLE FPC/FFC
(THICKNESS 0.3±0.03)

NOTES:


- 1.HUOSINGT: HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BEIGE
- 2.ACTUATOR: HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- 3.TERMINAL:PHOSPHOR BRONZE
PLATING:GOLD FLASH OR MATTE-TIN OR TIN (LEAD FREE)
- 4.FITTING NAIL:BRASS
PLATING:MATTE-TIN OR TIN (LEAD FREE)

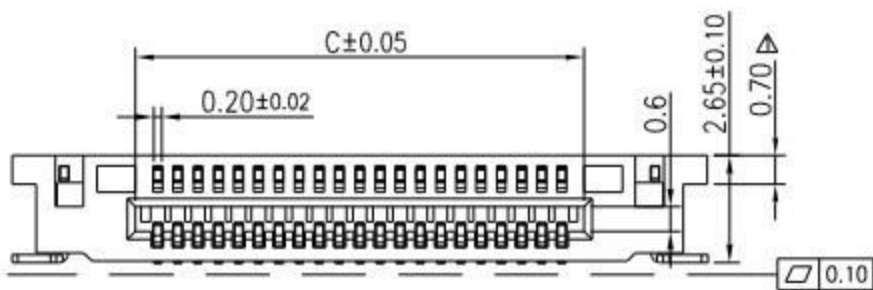

Dimensions

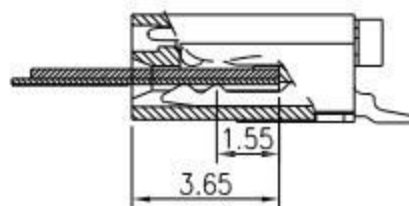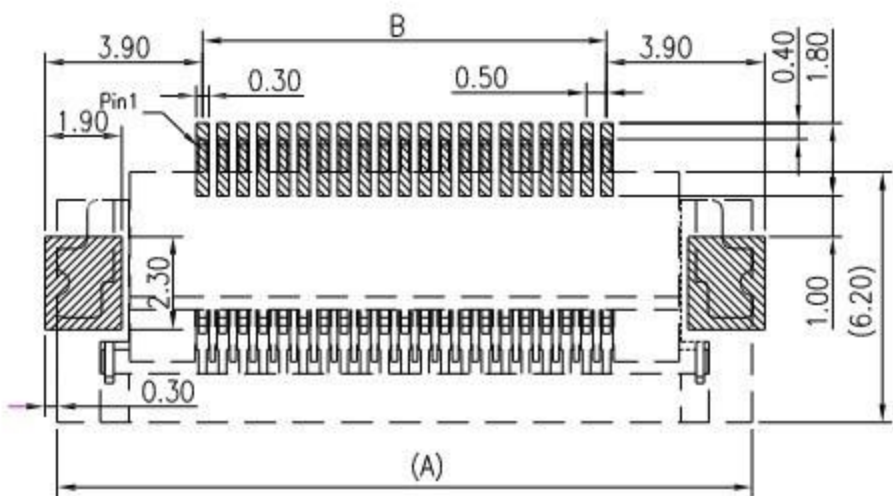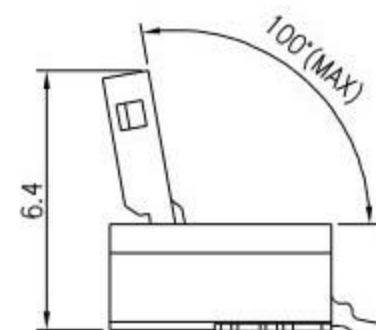

CABLE INSERT DIM.

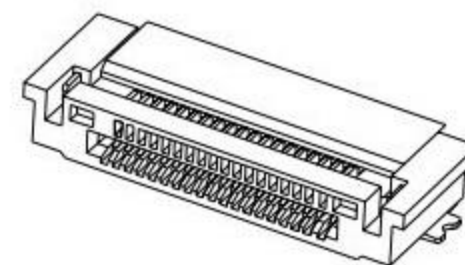

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

UNITS
mm

MAT'L

廣東科斯達電子科技有限公司

PART NO.(INTENDED USE)

TITLE:

0.5前插后掀盖大锁扣 H2.65

FINISH

APPD:


DWG NO.:

Q'TY

CHKD:

DR: HU 2016.09.28

PCS



SCALE

1/1

SHEET

1/1

REV.

A