

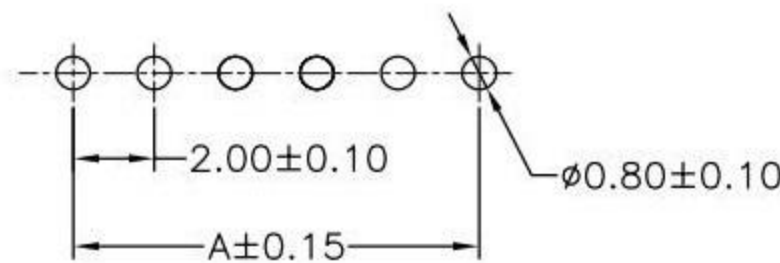


SPECIFICATIONS

Current rating : 2.0A AC , DC
 Voltage rating : 100V AC , DC
 Temperature rating : -25°C ~ +85°C
 Insulation resistance : 1,000MΩ min.
 Withstand voltage : 800V AC/minute
 Contact resistance : 20mΩ/Max
 Material:
 Housing : Nylon 66, UL94V-2
 Pin : Brass / Tin-plated
 Contact : Phosphor Bronze

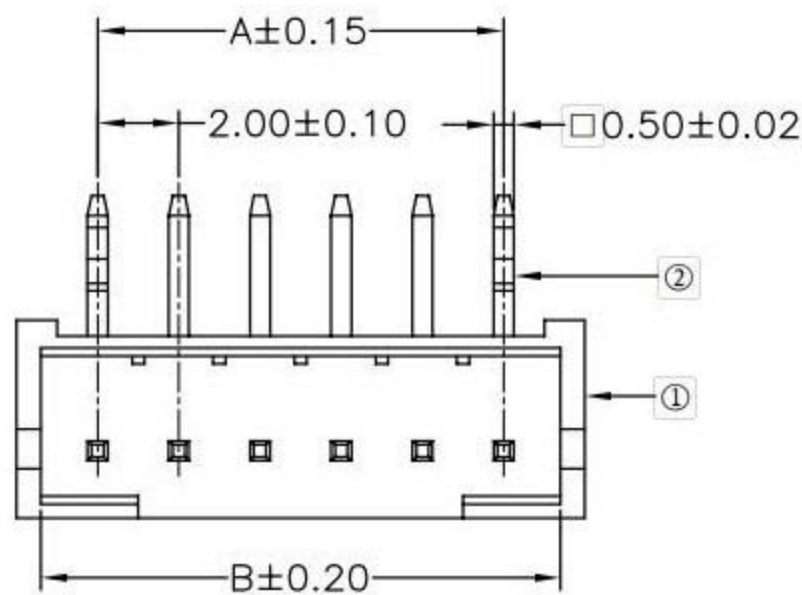

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

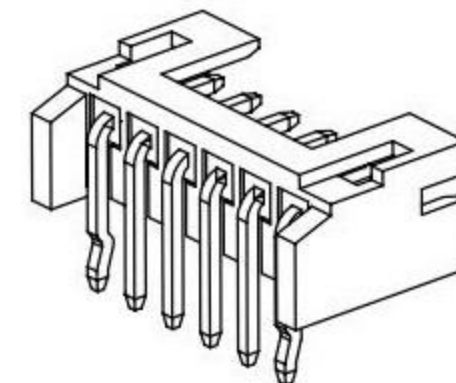

廣東科斯達電子科技有限公司

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S



UNITS MM

DRAWN BY: Jack Lu
 CHECKED BY: Jacky Chen
 APPROVED BY: Tony Kao

DATE: 11/13/12
 DATE: 11/13/12
 DATE: 11/13/12

MAT'L
 FINISH
 SCALE: 1 : 1
 SHEET NO. 1 of 1

TITLE: CONNECTOR
 MODLE
 DWG NO.
 PART NO.

SIZE: A4
 VER: R

ITEM NO. DESCRIPTION DRAWN DATE

A I B I C I D I E I F I G I H I I I J