




NOTES  
 1. MATERIALS:  
 HOUSING-PBT UL 94V-0  
 TERMINAL-COPPER ALLOY

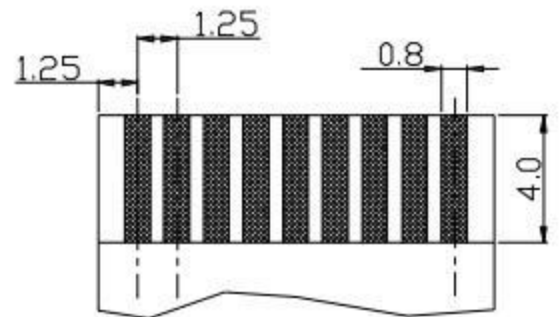

FFC/FPC DIMENSION  
 THICKNESS 0.3±0.05mm

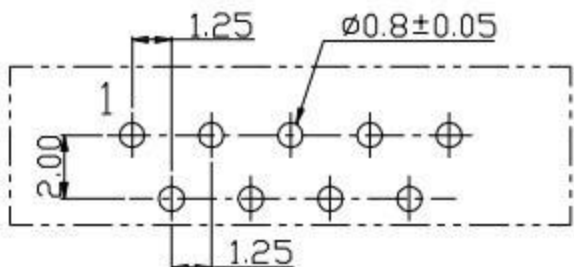

RECOMMEND PCB LAYOUT  
 COMPONENT SIDE  
 (FOR PD15-XX0XA)

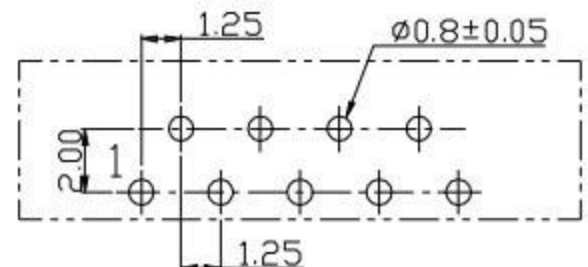

RECOMMEND PCB LAYOUT  
 COMPONENT SIDE  
 (FOR PD15-XX0XAW)

CKT	NO	A	B
3	030XAX	9.55	5.20
4	040XAX	10.80	6.45
5	050XAX	12.05	7.70
6	060XAX	13.30	8.95
7	070XAX	14.55	10.20
8	080XAX	15.80	11.45
9	090XAX	17.05	12.70
10	100XAX	18.30	13.95
11	110XAX	19.55	15.20
12	120XAX	20.80	16.45
13	130XAX	22.05	17.70
14	140XAX	23.30	18.95
15	150XAX	24.55	20.20
16	160XAX	25.80	21.45
17	170XAX	27.05	22.70
18	180XAX	28.30	23.95
19	190XAX	29.55	25.20
20	200XAX	30.80	26.45
21	210XAX	32.05	27.70
22	220XAX	33.30	28.95
23	230XAX	34.55	30.20
24	240XAX	35.80	31.45
25	250XAX	37.05	32.70
26	260XAX	38.30	33.95
27	270XAX	39.55	35.20
28	280XAX	40.80	36.45
29	290XAX	42.05	37.70
30	300XAX	43.30	38.95
31	310XAX	44.55	40.20
32	320XAX	45.80	41.45

UNITS mm	<b>廣東科斯達電子科技有限公司</b>		
MAT'L			
FINISH	PART NO.(INTENDED USE)	TITLE: 1.25帶鎖直插FPC连接器	
Q'TY PCS	APPD:	DWG NO.:	
	CHKD:		
	DR: HU 2016.09.28	SCALE 1/1	SHEET 1/1
		REV. A	

X.± 0.3	X'.± 5'
.X± 0.25	.X'.± 2'
.XX± 0.20	.XX'.± 1'
.XXX± 0.10	.XXX'.± 0.5'