



FFC/FPC DIMENSION  
THICKNESS 0.3±0.05mm

NOTES

1. MATERIALS:  
HOUSING-PBT UL 94V-0,  
TERMINAL-PHOSPHOR BRONZE.

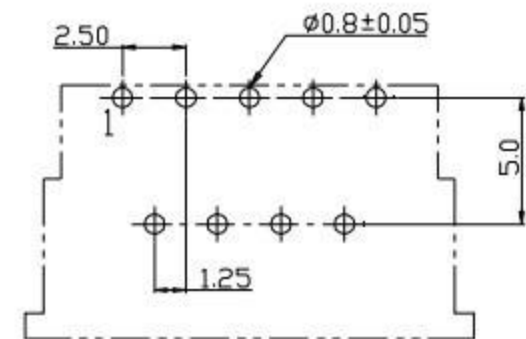

RECOMMEND PCB LAYOUT  
COMPONENT SIDE  
(FOR:GS15-XX1XAW)

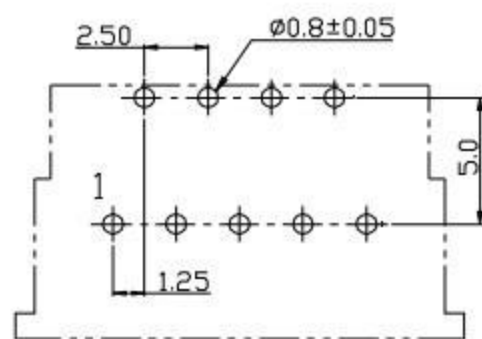

RECOMMEND PCB LAYOUT  
COMPONENT SIDE  
(FOR:GS15-XX1XA)

CKT	NO	A	B
3	031XAX	9.55	5.20
4	041XAX	10.80	6.45
5	051XAX	12.05	7.70
6	061XAX	13.30	8.95
7	071XAX	14.55	10.20
8	081XAX	15.80	11.45
9	091XAX	17.05	12.70
10	101XAX	18.30	13.95
11	111XAX	19.55	15.20
12	121XAX	20.80	16.45
13	131XAX	22.05	17.70
14	141XAX	23.30	18.95
15	151XAX	24.55	20.20
16	161XAX	25.80	21.45
17	171XAX	27.05	22.70
18	181XAX	28.30	23.95
19	191XAX	29.55	25.20
20	201XAX	30.80	26.45
21	211XAX	32.05	27.70
22	221XAX	33.30	28.95
23	231XAX	34.55	30.20
24	241XAX	35.80	31.45
25	251XAX	37.05	32.70
26	261XAX	38.30	33.95
27	271XAX	39.55	35.20
28	281XAX	40.80	36.45
29	291XAX	42.05	37.70
30	301XAX	43.30	38.95
31	311XAX	44.55	40.20
32	321XAX	45.80	41.45

UNITS  
mm

MAT'L

FINISH

APPD:

CHKD:

DR: HU 2016.09.28

廣東科斯達電子科技有限公司

PART NO.(INTENDED USE)


APPD:

CHKD:

DR: HU 2016.09.28

TITLE:  
1.25帶鎖彎插FPC连接器

DWG NO.:  
1.25-J-nPW



SCALE  
1/1

SHEET  
1/1

REV.  
A

X ± 0.3	X' ± 5'
.X ± 0.25	.X' ± 2'
.XX ± 0.20	.XX' ± 1'
.XXX ± 0.10	.XXX' ± 0.5'

Q'TY  
PCS