
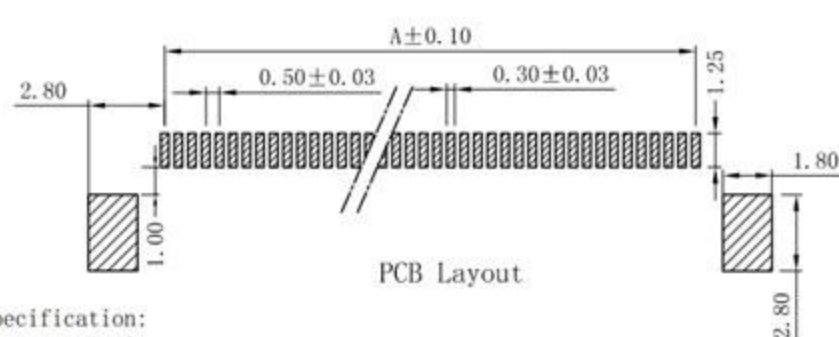
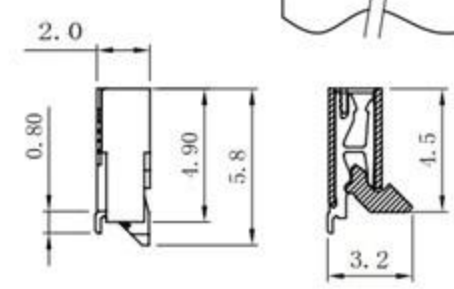
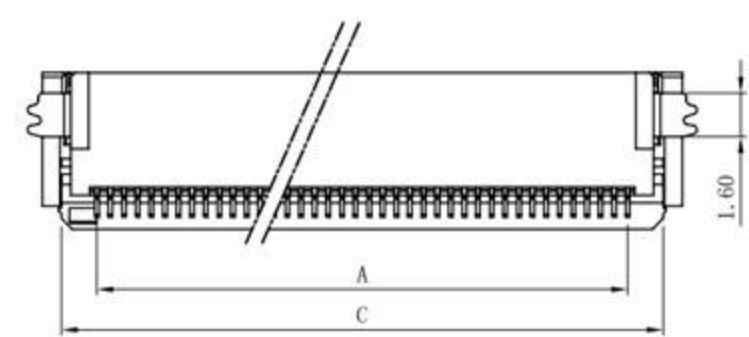



PITCH 0.5mm FPC CONNECTOR SMT TYPE

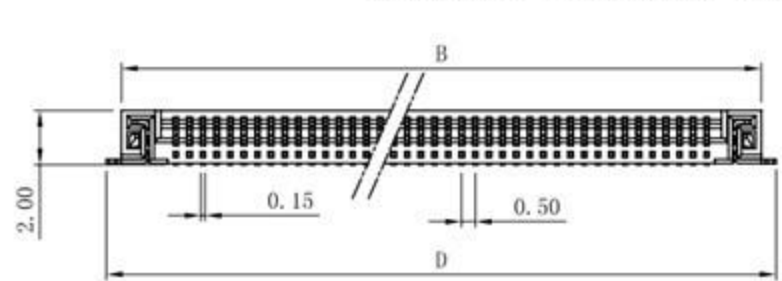

PCB Layout

specification:
 Current: 0.4A
 Voltage: 50V
 Withstand voltage: 200V
 Contact resistance: $\leq 20m\Omega$
 Insulation resistance: $500M\Omega$
 Temperature: $-20^{\circ}C \sim +85^{\circ}C$
 Plastic: LCP, UL94V-0
 Lock catch: LCP
 Shell splinter: Phosphor bronze gold plating

孔位	A	B	C	D
10	4.50	8.50	7.10	9
12	5.50	9.50	8.10	10
14	6.50	10.50	9.10	11
18	8.50	12.50	11.10	13
20	9.50	13.50	12.10	14
22	10.50	14.50	13.10	15
24	11.50	15.50	14.10	16
26	12.50	16.50	15.10	17
30	14.50	18.50	17.10	19
32	15.50	19.50	18.10	20
33	16.00	20.00	18.60	20.5
34	16.50	20.50	19.10	21
35	17.00	21.00	19.60	21.5
36	17.50	21.50	20.10	22
38	18.50	22.50	21.10	23
40	19.50	23.50	22.10	24
42	20.50	24.50	23.10	25
45	22.00	26.00	24.60	26.5
50	24.50	28.50	27.10	29
55	27.00	31.00	29.60	31.5
60	29.50	33.50	32.10	34

.X ± 0.3	.X* ± 5°	UNITS	mm
.X ± 0.25	.X* ± 2°	MAT'L	
.XX ± 0.20	.XX* ± 1°	FINISH	
.XXX ± 0.10	.XXX* ± 0.5°	Q'TY	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE HUI ELECTRON FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE HUI ELECTRON FACTORY			

廣東科斯達電子科技有限公司

PART NO. (INTENDED USE) FPC 0.5间距前插后压

APPD: CHKD: DR: YLZ 2012.05.10

SCALE	SHEET	REV.
1/1	1/1	A