



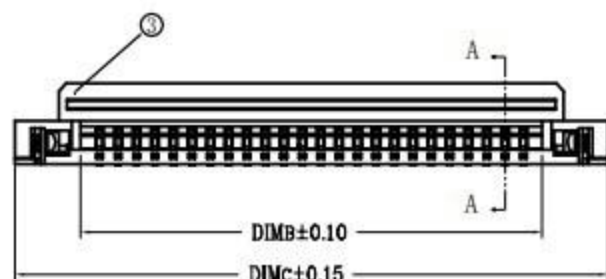


| 序号 | 品名               | 材质             |
|----|------------------|----------------|
| ①  | 0.5后压卧式胶芯 (H1.2) | LCP UL94V-0 本色 |
| ②  | 0.5后压卧式端子 (H1.2) | 磷青铜/表面镀锡       |
| ③  | 0.5后压卧式后盖 (H1.2) | LCP UL94V-0 黑色 |
| ④  | 0.5后压卧式焊片 (H1.2) | 磷青铜/表面镀锡       |

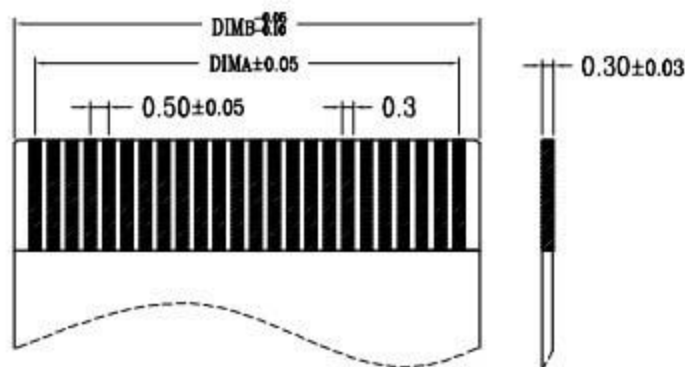


SECTION A-A

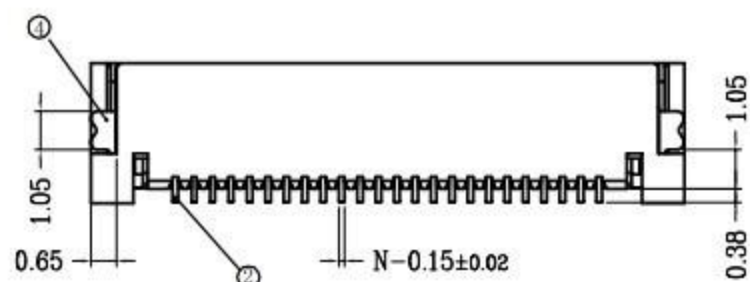

适用扁平线

| CKT | DIMA  | DIMB  | DIMC  | CKT | DIMA  | DIMB  | DIMC  |
|-----|-------|-------|-------|-----|-------|-------|-------|
| 4   | 1.50  | 2.52  | 6.10  | 33  | 16.00 | 17.02 | 20.60 |
| 5   | 2.00  | 3.02  | 6.60  | 34  | 16.50 | 17.52 | 21.10 |
| 6   | 2.50  | 3.52  | 7.10  | 35  | 17.00 | 18.02 | 21.60 |
| 7   | 3.00  | 4.02  | 7.60  | 36  | 17.50 | 18.52 | 22.10 |
| 8   | 3.50  | 4.52  | 8.10  | 37  | 18.00 | 19.02 | 22.60 |
| 9   | 4.00  | 5.02  | 8.60  | 38  | 18.50 | 19.52 | 23.10 |
| 10  | 4.50  | 5.52  | 9.10  | 39  | 19.00 | 20.02 | 23.60 |
| 11  | 5.00  | 6.02  | 9.60  | 40  | 19.50 | 20.52 | 24.10 |
| 12  | 5.50  | 6.52  | 10.10 | 41  | 20.00 | 21.02 | 24.60 |
| 13  | 6.00  | 7.02  | 10.60 | 42  | 20.50 | 21.52 | 25.10 |
| 14  | 6.50  | 7.52  | 11.10 | 43  | 21.00 | 22.02 | 25.60 |
| 15  | 7.00  | 8.02  | 11.60 | 44  | 21.50 | 22.52 | 26.10 |
| 16  | 7.50  | 8.52  | 12.10 | 45  | 22.00 | 23.02 | 26.60 |
| 17  | 8.00  | 9.02  | 12.60 | 46  | 22.50 | 23.52 | 27.10 |
| 18  | 8.50  | 9.52  | 13.10 | 47  | 23.00 | 24.02 | 27.60 |
| 19  | 9.00  | 10.02 | 13.60 | 48  | 23.50 | 24.52 | 28.10 |
| 20  | 9.50  | 10.52 | 14.10 | 49  | 24.00 | 25.02 | 28.60 |
| 21  | 10.00 | 11.02 | 14.60 | 50  | 24.50 | 25.52 | 29.10 |
| 22  | 10.50 | 11.52 | 15.10 | 51  | 25.00 | 26.02 | 29.60 |
| 23  | 11.00 | 12.02 | 15.60 | 52  | 25.50 | 26.52 | 30.10 |
| 24  | 11.50 | 12.52 | 16.10 | 53  | 26.00 | 27.02 | 30.60 |
| 25  | 12.00 | 13.02 | 16.60 | 54  | 26.50 | 27.52 | 31.10 |
| 26  | 12.50 | 13.52 | 17.10 | 55  | 27.00 | 28.02 | 31.60 |
| 27  | 13.00 | 14.02 | 17.60 | 56  | 27.50 | 28.52 | 32.10 |
| 28  | 13.50 | 14.52 | 18.10 | 57  | 28.00 | 29.02 | 32.60 |
| 29  | 14.00 | 15.02 | 18.60 | 58  | 28.50 | 29.52 | 33.10 |
| 30  | 14.50 | 15.52 | 19.10 | 59  | 29.00 | 30.02 | 33.60 |
| 31  | 15.00 | 16.02 | 19.60 | 60  | 29.50 | 30.52 | 34.10 |
| 32  | 15.50 | 16.52 | 20.10 |     |       |       |       |

适用线路板

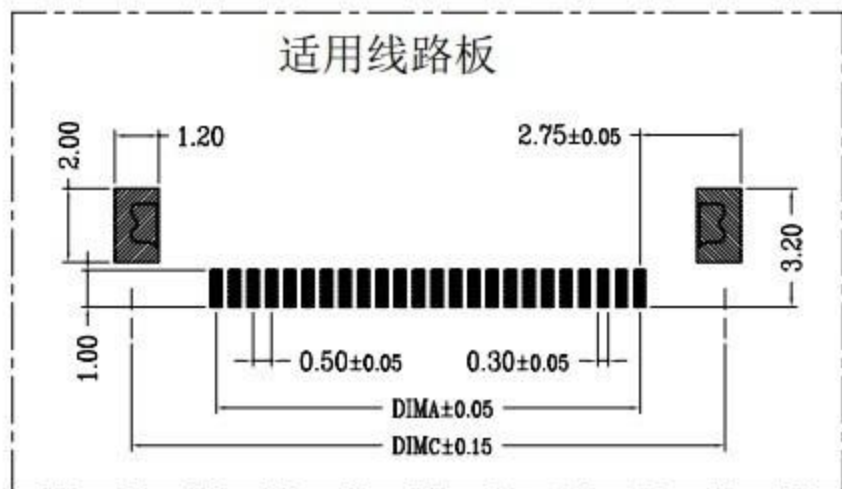

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围:  $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$ 。
3. 额定电压: 50V, AC/DC(等效)。
4. 接触电阻:  $\leq 0.03 \Omega$ 。
5. 绝缘电阻:  $\geq 500M \Omega$ 。

UNITS  
mm

MAT'L

廣東科斯達電子科技有限公司

PART NO.(INTENDED USE)

TITLE:

APPD:

DWG NO.:

CHKD:

DR: HU 2016.09.25



SCALE

1/1

SHEET

1/1

REV.

A

|            |             |
|------------|-------------|
| X.± 0.3    | X°± 5'      |
| .X± 0.25   | .X°± 2'     |
| .XX± 0.20  | .XX°± 1'    |
| .XXX± 0.10 | .XXX°± 0.5' |

Q'TY  
PCS