


RECOMMEND PCB LAYOUT

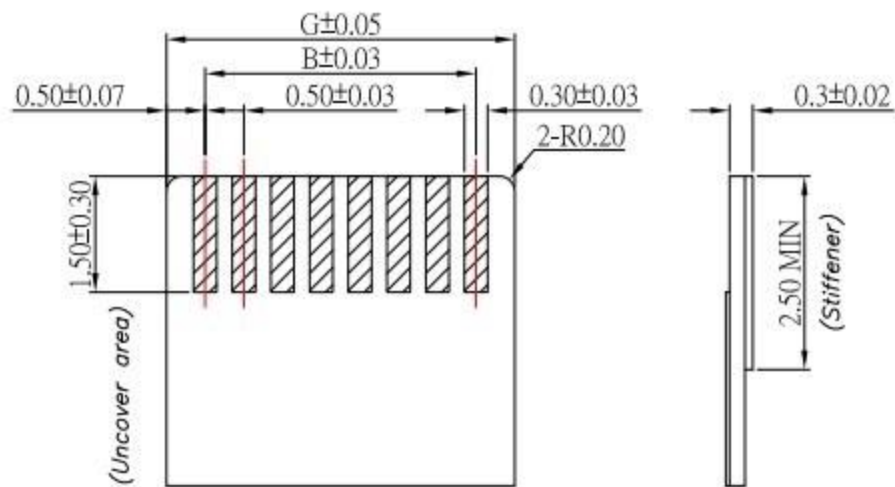

Applicable FPC

Number of Contacts	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G
40	22.00	19.50	20.57	21.39	21.10	21.90	20.50
34	19.00	16.50	17.57	18.39	18.10	18.90	17.50
32	18.00	15.50	16.57	17.39	17.10	17.90	16.50
30	17.00	14.50	15.57	16.39	16.10	16.90	15.50
28	16.00	13.50	14.57	15.39	15.10	15.90	14.50
26	15.00	12.50	13.57	14.39	14.10	14.90	13.50
24	14.00	11.50	12.57	13.39	13.10	13.90	12.50
22	13.00	10.50	11.57	12.39	12.10	12.90	11.50
20	12.00	9.50	10.57	11.39	11.10	11.90	10.50
16	10.00	7.50	8.57	9.39	9.10	9.90	8.50
14	9.00	6.50	7.57	8.39	8.10	8.90	7.50

NOTES:

1. MATERIAL:

- 1.1 HOUSING: HIGH-TEMP
- 1.2 ACTUATOR: HIGH-TEMP
- 1.3 CONTACT: COPPER ALLOY
- 1.4 PEG: COPPER ALLOY

2. PLATING:

- 2.1 CONTACT: GOLD PLATED ON NICKEL OVERALL
- 2.2 LEG: TIN PLATED ON NICKEL OVERALL

3. RATING:

- 3.1 CURRENT RATING: 0.5A AC/DC
- 3.2 VOLTAGE RATING: 50V AC/DC
- 3.3 TEMPERATURE RANGE: -55°C~+85°C

廣東科斯達電子科技有限公司

TOLERANCE UNLESS OTHERWISE STATED:  
 Up to 5 ±0.2  
 Above 5 - 15 ±0.3  
 Above 15 - 30 ±0.4  
 Above 30 - 50 ±0.5  
 Angle ±0.3°

3RD. ANGEL'S



UNITS MM

DRAWN BY: Jack Lu  
 CHECKED BY: Jacky Chen  
 APPROVED BY: Tony Kao

DATE: 01/10/19  
 DATE: 01/10/19  
 DATE: 01/10/19

MAT'L  
 FINISH  
 SCALE  
 SHEET NO.

TITLE  
 MODLE  
 DWG NO.  
 PART NO.

CONNECTOR  
 0.5FPC H1.0 後撤式 14PIN以上 0.3 CABLE  
 SIZE: A4  
 VER: R

ITEM NO. DESCRIPTION DRAWN DATE