




REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Lucky	06/20/20'

(uncompressed)

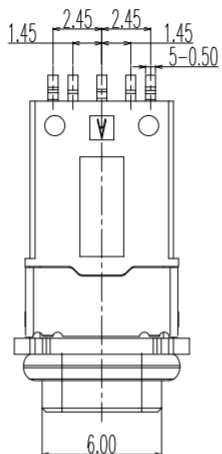


(uncompressed)



3D VIEW





IP-X7
30min/1m






SPECIFICATION:




- CURRENT RATING:DC 0.5A MAX.
- VOLTAGE RATING:DC 12V.
- CONTACT RESISTANCE:50m Ω MAX.
- INSULATION RESISTANCE:100M Ω MIN. AT 500V DC.
- WITHSTANDING VOLTAGE:500V AC FOR 1 MINUTE.
- LIFE TEST:5000 CYCLES MIN,
- MATING FORCE:3~30N,
UNMATING FORCE:3~30N.
- TEPROOF LEVEL:IPX7

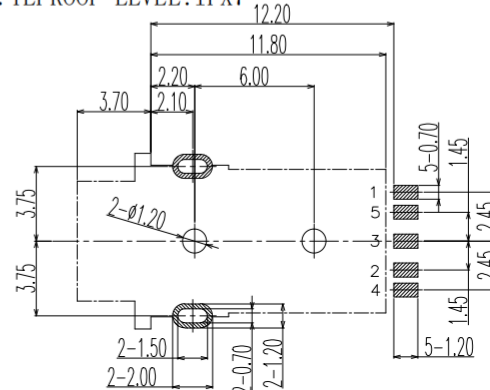

RECOMMENDED P.C.B LAYOUT
TOP VIEW

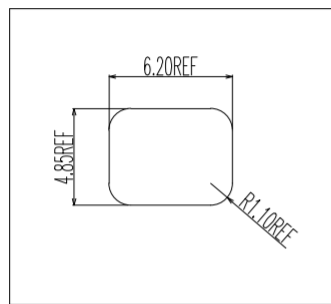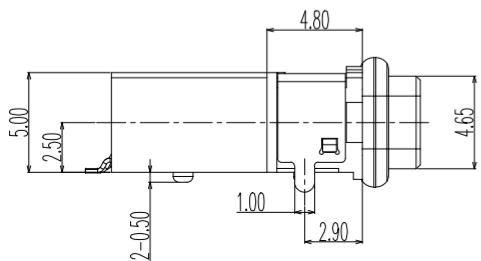

面板开孔参考尺寸

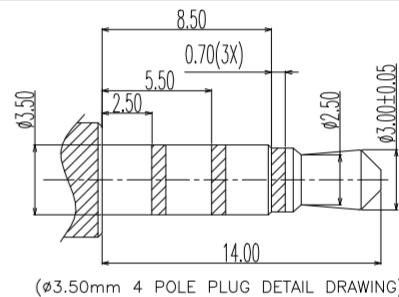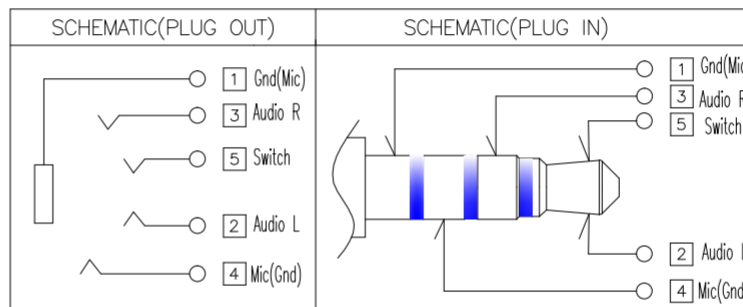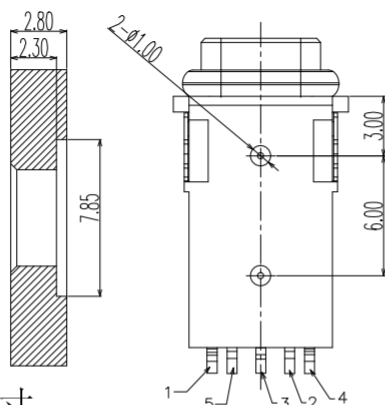

9	SILICA GEL	1	SILICA GEL COLOR BLACK	
8	COVER	1	HIGH TEMPERATURE PLASTIC COLOR BLACK	
7	HOUSING	1	HIGH TEMPERATURE PLASTIC COLOR BLACK	
6	SHELL	1	PHOSPHOR BRONZE; NICKEL PLATED OVERALL	
5	TERMINAL 5#	1	PHOSPHOR BRONZE; GOLD FLASH ON CONTACT AREA; GOLD FLASH PLATING ON SOLDER	
4	TERMINAL 4#	1		
3	TERMINAL 3#	1		
2	TERMINAL 2#	1	PHOSPHOR BRONZE; GOLD FLASH ON CONTACT AREA; GOLD FLASH PLATING ON SOLDER	
1	TERMINAL 1#	1		
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

MEASURE POINT:
QUADRANT POINT
TANGENCY POINT
INTERSECTION POINT



UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ±0.25
X.X ±0.20
X.XX ±0.15
X.XXX ±0.10
ANGULAR ±3'

广东科斯达电子科技有限公司
KSDKG Guang dong Keside Electronic Technology Co., Ltd.

DESIGN:	DATE:	TITLE:		
CHECKED:	DATE:	Ø3.5mm PHONE JACK		
APPROVED:	DATE:	PART NO. PJT-0089	REV.: A	SCALE: 1:1
DRAWING NO.			SIZE: A4	SHEET: 1/1