
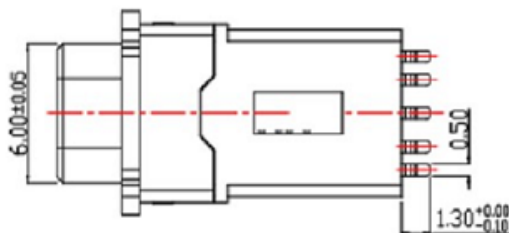


PROPRIETARY INFORMATION
COMPANY CONFIDENTIAL

Autodesk



REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Lucky	06/20/20'

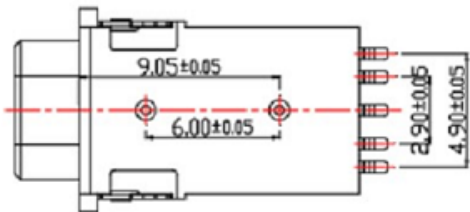


IP-X7
30min/1m

SPECIFICATION:


- CURRENT RATING:DC 0.5A MAX.
- VOLTAGE RATING:DC 12V.
- CONTACT RESISTANCE:50m Ω MAX.
- INSULATION RESISTANCE:100M Ω MIN. AT 500V DC.
- WITHSTANDING VOLTAGE:500V AC FOR 1 MINUTE.
- LIFE TEST:5000 CYCLES MIN,
- MATING FORCE:3~30N,
UNMATING FORCE:3~30N.
- TEPROOF LEVEL:IPX7

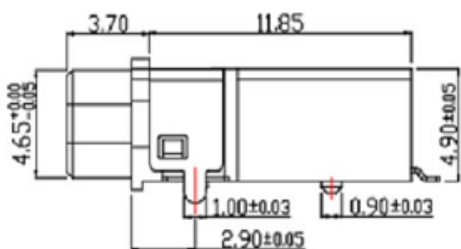

电 路 图

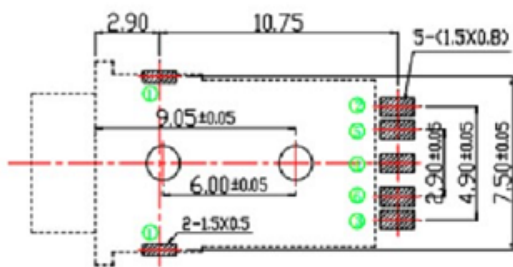

安 装 板 印 制 孔



技术要求:

- 产品外观应无明显损伤、裂纹、锈迹;
- 未注公差按GB/T1804-m.
- 防水等级: IPX7

ITEM	NAME	Q'TY	DESCRIPTION	NOTE
9	SILICA GEL	1	SILICA GEL COLOR BLACK	
8	COVER	1	HIGH TEMPERATURE PLASTIC COLOR BLACK	
7	HOUSING	1	HIGH TEMPERATURE PLASTIC COLOR BLACK	
6	SHELL	1	PHOSPHOR BRONZE; NICKEL PLATED OVERALL	
5	TERMINAL 5#	1	PHOSPHOR BRONZE; GOLD FLASH ON CONTACT AREA; GOLD FLASH PLATING ON SOLDER	TAIL AREA, ALL
4	TERMINAL 4#	1		
3	TERMINAL 3#	1		
2	TERMINAL 2#	1	PHOSPHOR BRONZE; GOLD FLASH ON CONTACT AREA; GOLD FLASH PLATING ON SOLDER	TAIL AREA, ALL
1	TERMINAL 1#	1		

MEASURE POINT:
QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ±0.25
X.X ±0.20
OVER NICKEL PLATED X.xxx ±0.15
X.xxxx ±0.10
ANGULAR ±3'

广东科斯达电子科技有限公司
KSDKG Guang dong Keside Electronic Technology Co., Ltd.

DESIGN:	DATE:	TITLE:		
CHECKED:	DATE:	φ3.5mm PHONE JACK		
APPROVED:	DATE:	PART NO. PJT-0089	REV.: A	SCALE: 1:1
DRAWING NO.		SIZE: A4	SHEET: 1/1	UNIT: mm

Autodesk

Autodesk

Autodesk