


Rating	15A 125V AC 1/8HP 10A 250V AC 1/3HP
Contact resistance	50mΩ Max
Insulation resistance	DC 500V 100MΩ Min
Dielectric strength	AC 1500V 1 minute
Cut-out	 6 mm max

FEATURES

- * MATERIAL: Metal lever and bushing are nickel plated metal. Frame is metal plated steel. Base is phenolic.
- * Standard toggle lever.
- * Indicator plate and watertight boot are optional.



R13-29

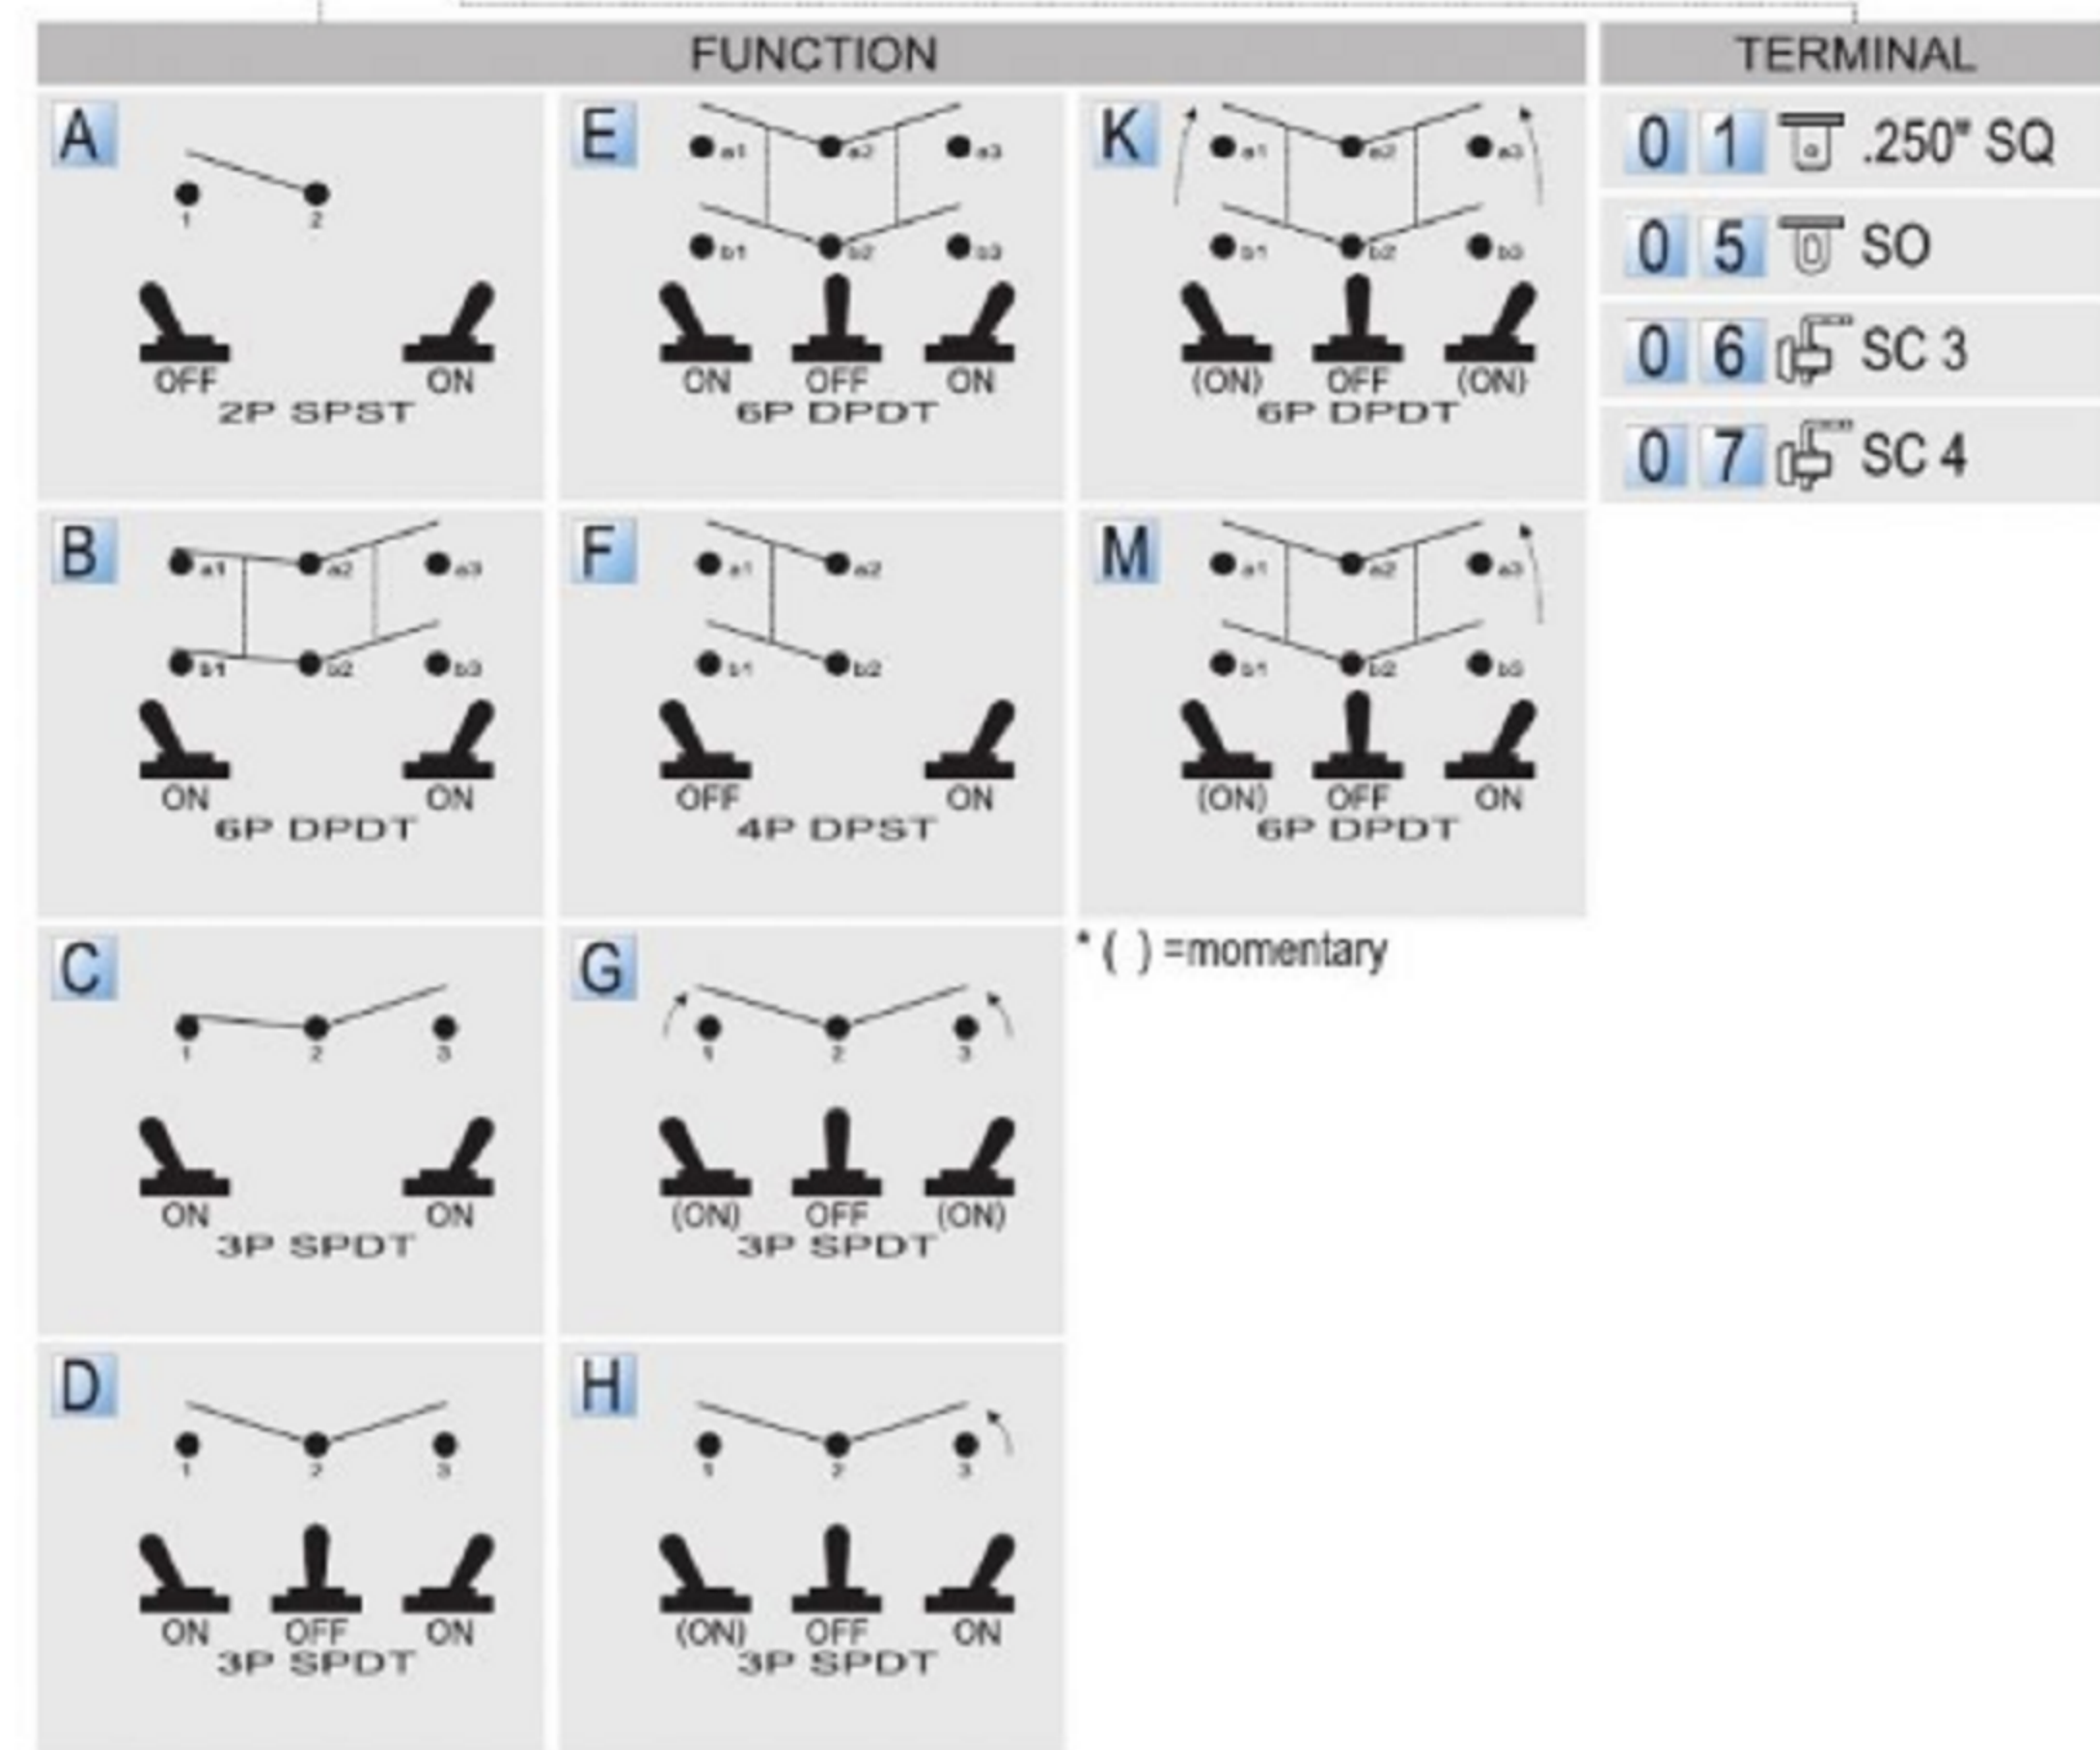

广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED:	Up to 5 ±0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15 ±0.3				
	Above 15 ~ 30 ±0.4				
	Above 30 ~ 50 ±0.5				
	Angle ±0.3				

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	12/27/22		MODLE	TACT SWITCH WITH LED
CHECKED BY:	DATE	FINISH	DWG NO.	
Jacky Chen	12/27/22		PART NO.	
APPROVED BY:	DATE	SCALE	SHEET NO.	
Tony Kao	12/27/22	1 : 1	1 of 1	

ITEM NO.	DESCRIPTION	DRAWN	DATE