

**主要技术特性要求:**

**1. 使用条件:**

环境温度: -25~70℃

相对湿度: 95% (40℃)

**2. 额定负荷: 2A 12V DC**

**3. 接触电阻: ≤30mΩ**


**4. 绝缘电阻: ≥100MΩ**

**5. 耐压: AC250V (50Hz) 1min**

**6. 插拔力: 5-35N**

**7. 寿命: 5000次**

PCB板安装孔图

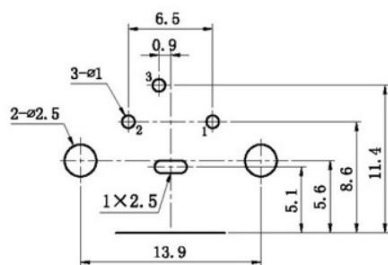

10	铜壳	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
9	左长针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
8	右长针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
7	左中针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
6	右中针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
5	右短针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
4	左短针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
3	包圆	1	黄铜带H62 Y1=0.25mm	D. Cu/Sn			
2	塑料后盖	1	PBT				
1	底座	1	PBT				
序号	名称	数量	材料	处理	单件质量	总计质量	备注

A4					普通公差			广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	投影 PROJECTED 校对 CHECKED BY 核准 APPROVAL BY	品名 PRODUCT NAME MDC微型端子	比例 SCALE 1: 1
A3				COMMON TOLERANCE :							
A2				X.XX	±0.10	单位 UNIT mm					
A1				X.X	±0.15	绘图 DRAWN BY					
REV.	DATE	REVISION	DESCRIPTION	ISSUE	X	±0.25	日期 DATE	2013.04.15	核准	型号 MODEL NO.	
					ANGULAR	±3°				图号 DWG NO.	S端子 DIN插座