


REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.07.04

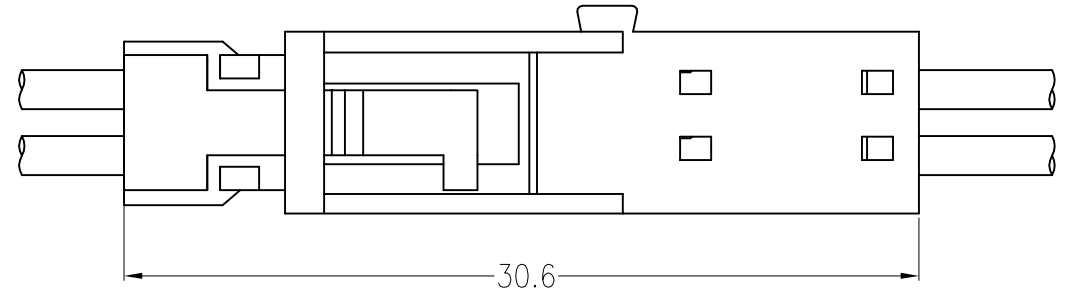





### Assembly Layout

#### 主要技术参数 Main Specifications

线 数 (Poles): 02  
 接触电阻 (Contact resistance):  $\leq 20m\Omega$   
 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$   
 额定电压 (Rated voltage): 250V AC DC  
 额定电流 (Rated current): 3.0A AC DC  
 耐 电 压 (Withstand Voltage): 1500V AC/minute  
 温度范围 (Temperature Range) :  $-25^{\circ}C \sim +85^{\circ}C$

#### ORDER INFORMATION:

<b>C2542P-02-A6W-P-1</b>			
PART No.		PACKAGING:	1=大口
No. OF CIRCUITS:	02	PACKAGING:	P=PE
		PLASTIC MATERIAL:	A6W=PA66 (WHITE)

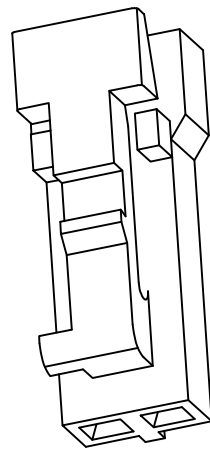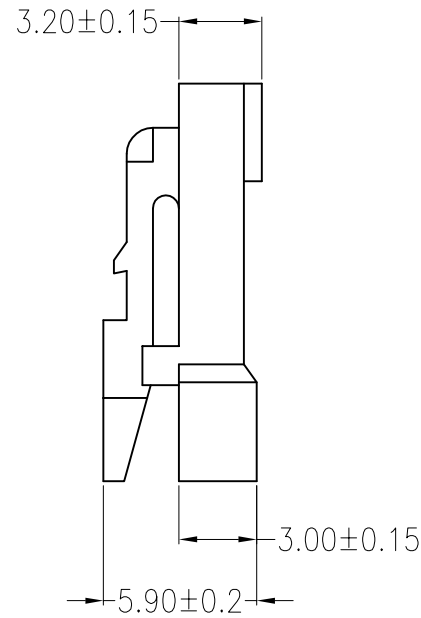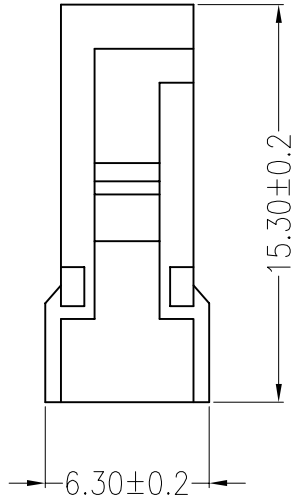



ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B				
A	PEDESTAL	1 PCS	PA66	

X.±0.5	X.±5'	USE: CUSTOMEP	TITLE:	
.X±0.3	.X±2'		PART NO.:	
.XX±0.25	.XX±1'		C2542P-02-A6W-P-1	
--	--		DWG NO.:	
⊕	UNITS: mm	DR: 蒋建银	GCCP-0604	
			SCALE 1 : 1	SHEET 1 / 1




**广东科斯达电子科技有限公司**  
 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

REV	DESCRIPTION	DESIGN	DATE
A0	Release	蒋建银	2017.10.10


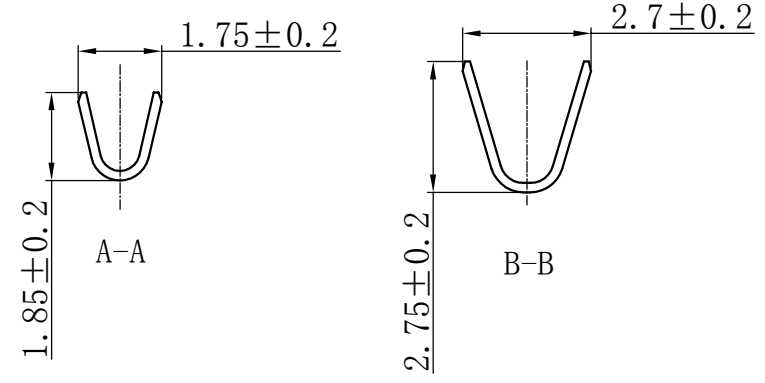
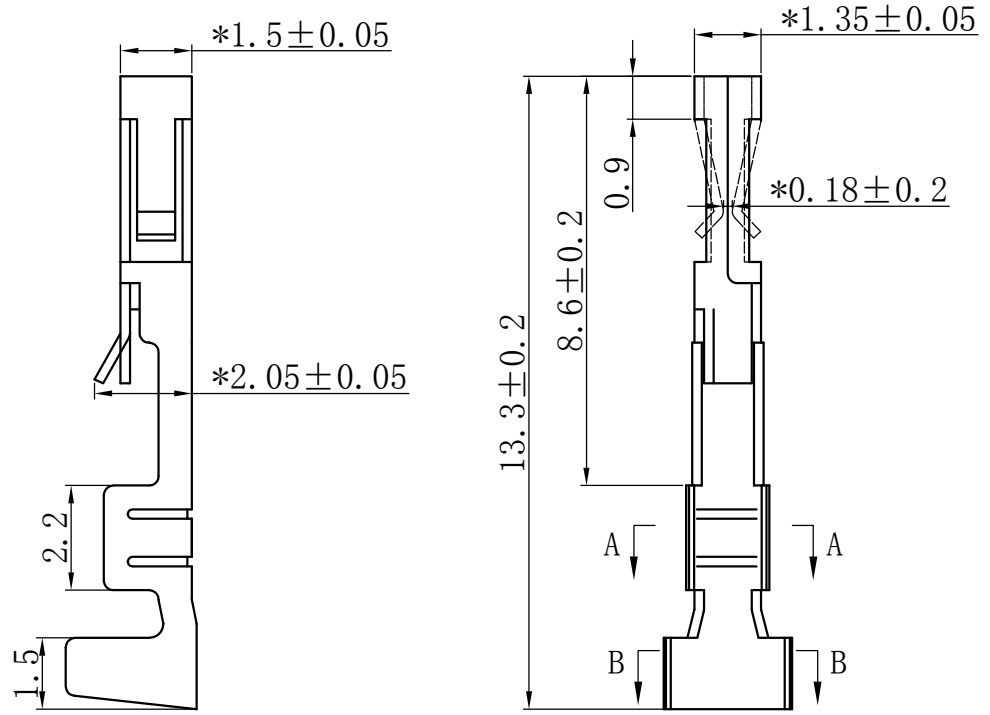


Ordering Information & Specification:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
C2542PT-04端子	AWG #20~#24	2.7mm(max)	Phosphor bronze	Sn-plated	

 <b>广东科斯达电子科技有限公司</b> GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.			TITLE: 高脚
X.±0.5	X.±5'	USE: CUSTOMER	PART NO.: C2542PT端子
.X±0.3	.X±2'	APPD: 邵敬和	DWG NO.: GCDZ-0063
.XX±0.25	.XX±1'	CHKD: 田峰	SCALE 1:1
--	--	DR: 蒋建银	SHEET 1/1
 UNITS: mm			

REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.06.15

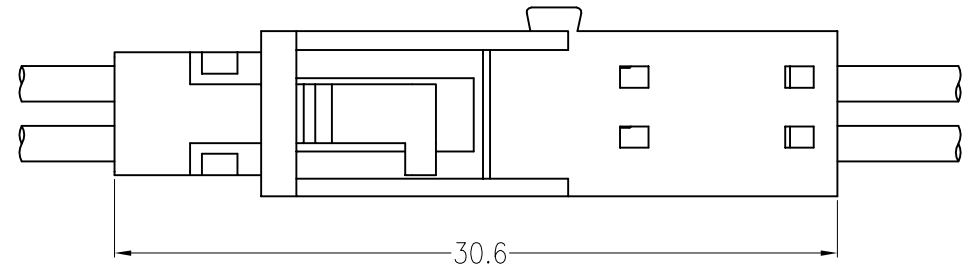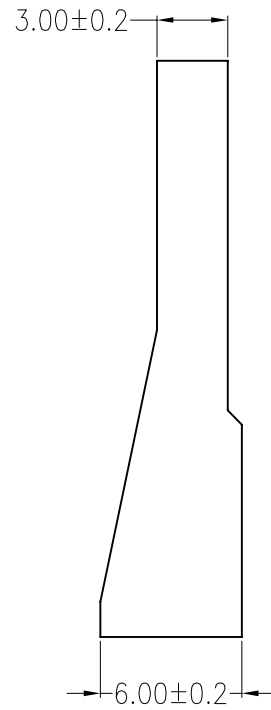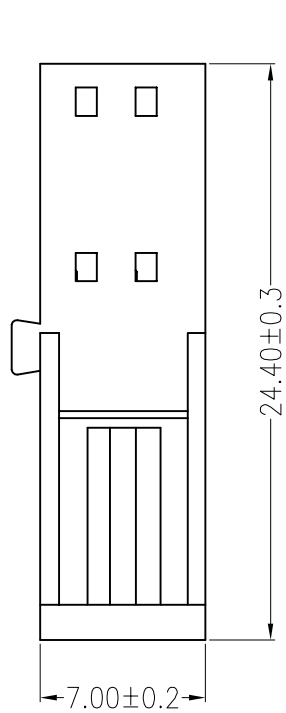



### Assembly Layout

#### 主要技术参数 Main Specifications

线 数 (Poles): 02  
 接触电阻 (Contact resistance):  $\leq 20m\Omega$   
 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$   
 额定电压 (Rated voltage): 250V AC DC  
 额定电流 (Rated current): 3.0A AC DC  
 耐 电 压 (Withstand Voltage): 1500V AC/minute  
 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

#### ORDER INFORMATION:



<b>C2542R-02-A6W-P</b>		
PART No.		PACKAGING: P=PE
No. OF CIRCUITS: 02		PLASTIC MATERIAL: A6W=PA66 (WHITE)

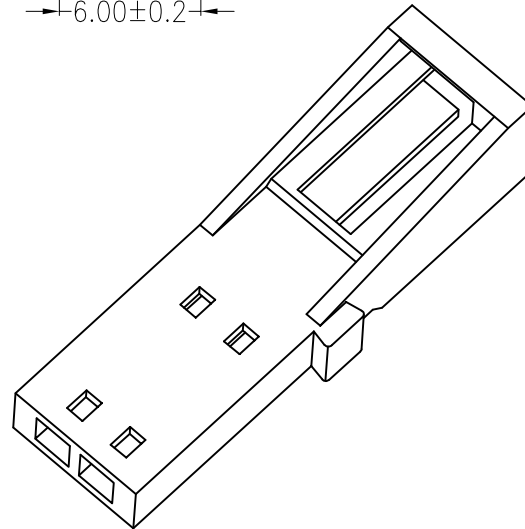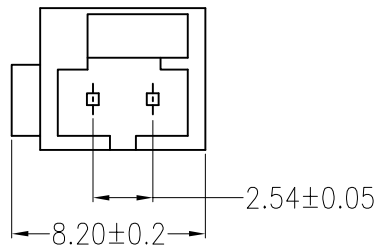

C				
B				
A	PEDESTAL	1 PCS	PA66	
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH



<b>广东科斯达电子科技有限公司</b> GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.			TITLE:	
X.±0.5	X.±5'	USE:	PART NO.:	
.X±0.3	.X±2'	CUSTOMEP	C2542R-02-A6W-P	
.XX±0.25	.XX±1'	APPD:	DWG NO.:	
--	--	邵敬和	GCCP-0603	
		CHKD:	SCALE	
		田峰	1 : 1	
		DR:	SHEET	
		蒋建银	1 / 1	

REV	DESCRIPTION	DESIGN	DATE
A0	Release	蒋建银	2017.10.10

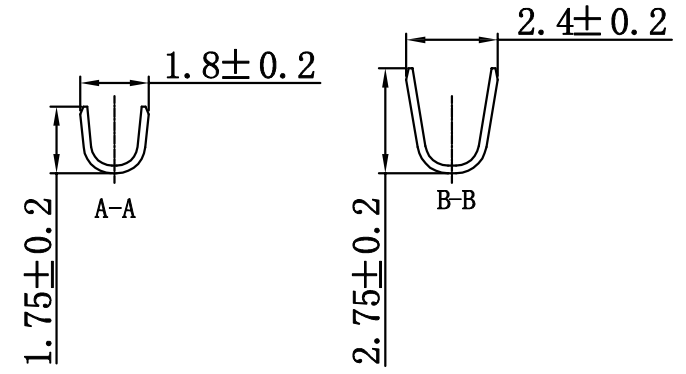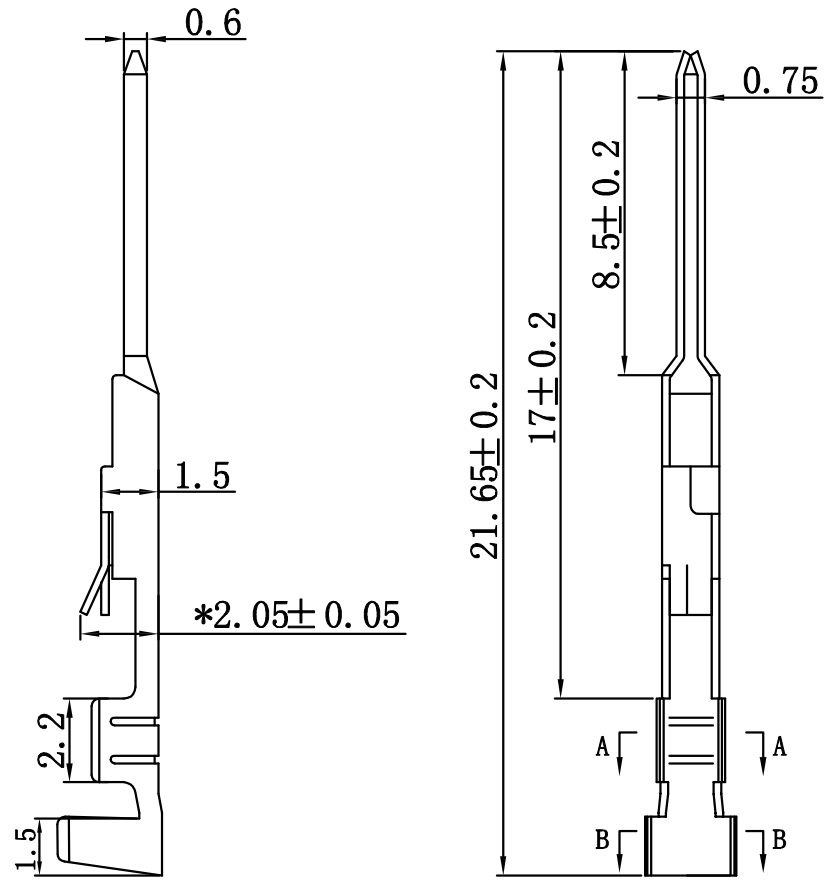

Ordering Information & Specification:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
C2542RT-04端子	AWG #20~#24	2.7mm(max)	Phosphor bronze	Sn-plated	

 <b>广东科斯达电子科技有限公司</b> GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.		TITLE: 高脚	
X.±0.5	X.±5'	USE: CUSTOMER	PART NO.: C2542RT端子
.X±0.3	.X±2'	APPD: 邵敬和	DWG NO.: GCDZ-0081
.XX±0.25	.XX±1'	CHKD: 田峰	SCALE: 1:1
--	--	DR: 蒋建银	SHEET: 1/1
 UNITS: mm			

A

B




C

D

E

F

REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.06.15

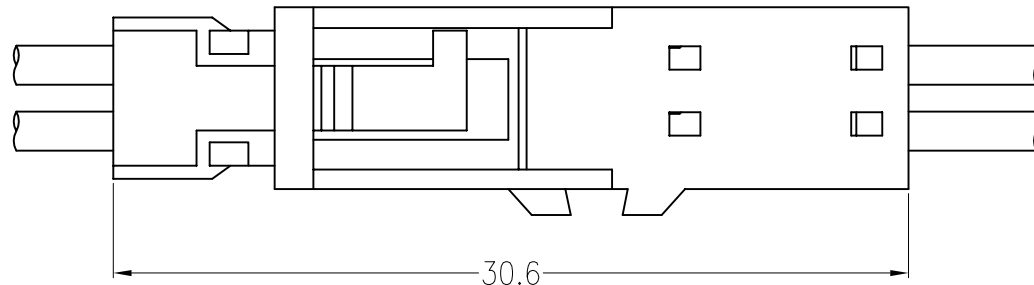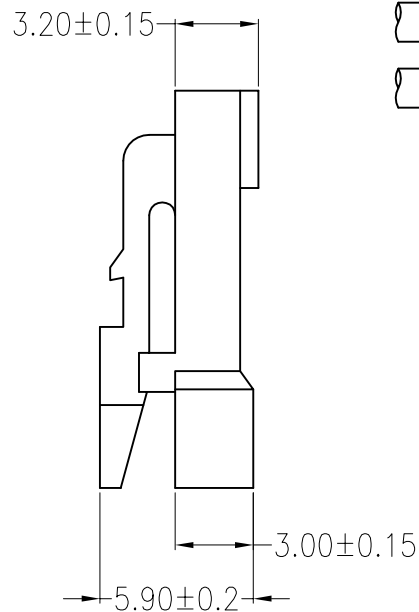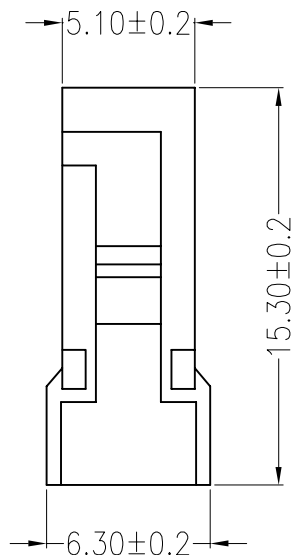



## Assembly Layout

### 主要技术参数 Main Specifications

线数 (Poles): 02  
 接触电阻 (Contact resistance):  $\leq 20m\Omega$   
 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$   
 额定电压 (Rated voltage): 250V AC DC  
 额定电流 (Rated current): 3.0A AC DC  
 耐电压 (Withstand Voltage): 1500V AC/minute  
 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

### ORDER INFORMATION:

<b>C2543P-02-A6K-P-1</b>			
PART No.		PACKAGING:	1=大口
No. OF CIRCUITS:	02	PACKAGING:	P=PE
		PLASTIC MATERIAL:	A6K=PA66 (BLACK)

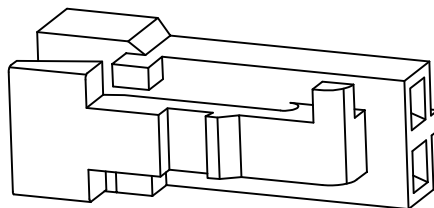

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B				
A	PEDESTAL	1 PCS	PA66	

<b>广东科斯达电子科技有限公司</b> GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.			TITLE:	
X.±0.5	X.±5'	USE:	PART NO.:	
.X±0.3	.X±2'	APPD:	C2543P-02-A6K-P-1	
.XX±0.25	.XX±1'	CHKD:	DWG NO.:	
--	--	DR:	JKUN/GCCP-0606	
UNITS: mm		蒋建银	SCALE	SHEET
			1 : 1	1 / 1

A

B

C

D

E

F

1

2

3

4

5

1

2

3

4

5