
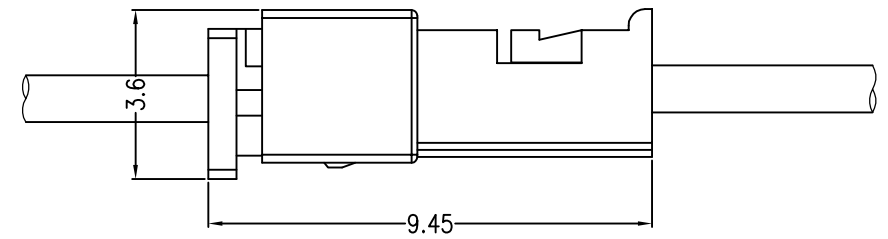
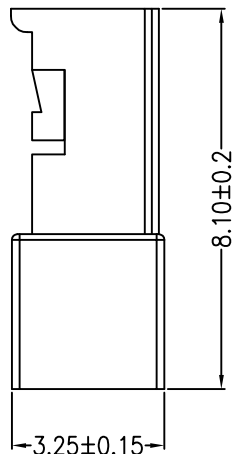


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A	-	NEW RELEASE	蒋建银	2018.01.08

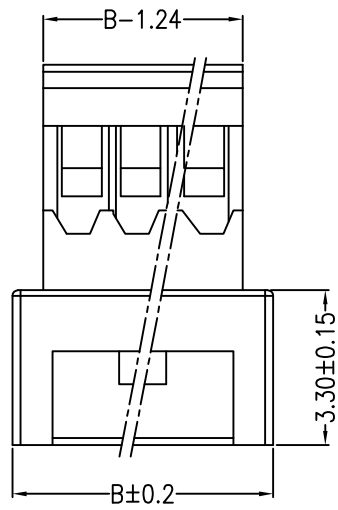

Assembly Layout



主要技术参数 Main Specifications

- 线数 (Poles): 02 to 16
- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 100M\Omega$
- 额定电压 (Rated voltage): 125 V AC DC
- 额定电流 (Rated current): 1.0A AC DC
- 耐电压 (Withstand Voltage): 500V AC/minute
- 温度范围 (Temperature Range): $-25^{\circ}C \sim +105^{\circ}C$

ORDER INFORMATION:

C1251R--A5W-P**

PART No.:	C1251R-**-A5W-P	PACKAGING:	P=PE
No. OF CIRCUITS:	**	PLASTIC MATERIAL:	A5W=PA66 (WHITE)

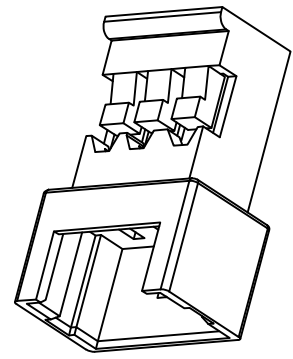





Circuits	Dimensions (mm)	
	A	B
02	1.25	4.20
03	2.50	5.45
04	3.75	6.70
05	5.00	7.95
06	6.25	9.20
07	7.50	10.45
08	8.75	11.70
09	10.00	12.95
10	11.25	14.20
11	12.50	15.45
12	13.75	16.70
13	15.00	17.95
14	16.25	19.20
15	17.50	20.45
16	18.75	21.70

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B				
A	HOUSING	1~16 PCS	PA66	COLOR:WHITE

广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	TITLE: C1251R 1.25mm PITCH Housing	
	PART NO.: C1251R-**-A5W-P	
	DWG NO.: GCCP-0592	
	SCALE 1 : 1	SHEET 1 / 1

.X±0.35	X.±	USE:	CUSTOMER
.XX±0.25	.X±	APPD:	邵敬和
.XXX±0.15	.XX±	CHKD:	田峰
--	--	DR:	蒋建银
UNITS: mm			

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	蒋建银	2018.05.24

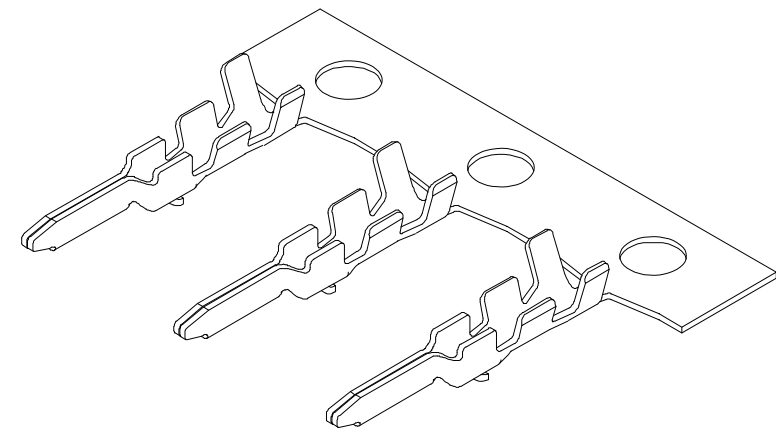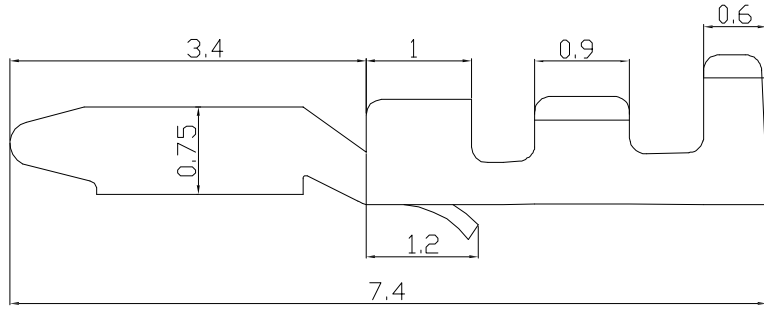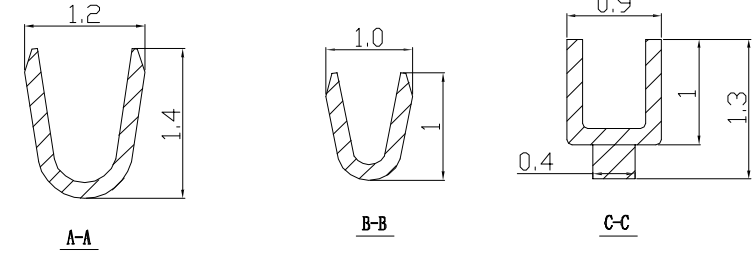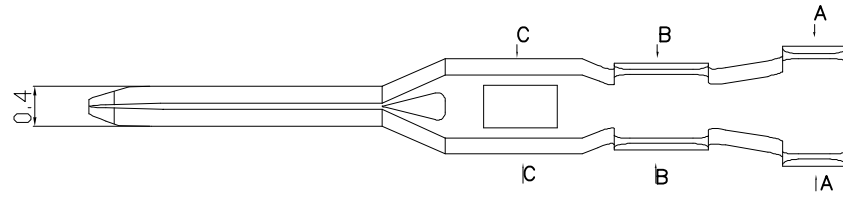

Ordering Information & Specification:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
C1251RT端子	AWG #32~#28	1.0mm(MAX)	Phosphor bronze	Sn-plated	15000 pcs

广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.		TITLE: 1.25空中对接端子	
X.±0.1	X.±1'	USE: MANUFACTURE	PART NO.: C1251RT-02端子
.X±0.05	.X±0.5'	APPD: 谭龙清	DWG NO.: JKUN-GCDZ-0022
.XX±0.01	.XX±0.1'	CHKD: 田峰	SCALE: 1 : 1
.XXX±0.005	.XXX±0.05'	DR: 蒋建银	SHEET: 1 / 1
UNITS: mm			