






REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	FangSongLe	2020/09/05

Specifications:


Contact resistance: $\leq 30m\Omega$
 Insulation resistance: $\geq 1000M\Omega$
 Rated voltage: 200V AC DC
 Rated current: 1.0A AC DC
 Withstand Voltage: 1000V AC/minute
 Temperature Range: $-25^{\circ}C \sim +105^{\circ}C$
 Housing: LCP UL94V-0, BEIGE
 Contacts: PhosphorBronze/MATTE Sn

ORDER INFORMATION:

B3002G-02-F3MB1-R		PACKAGING: R=REEL
PART No.:		Metal code: 1=PhosphorBronze
No.OF CIRCUITS:	02	PLATING: B=MATTE Sn
PLASTIC MATERIAL:	F3M=LCP (BEIGE)	

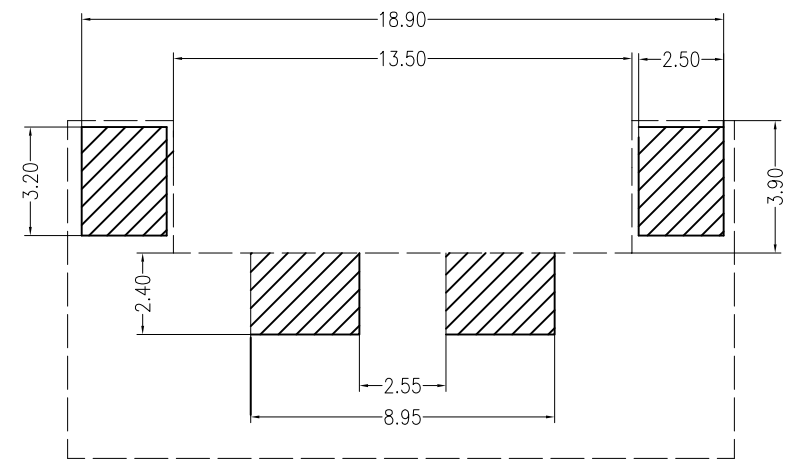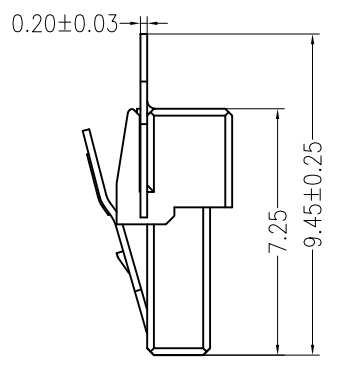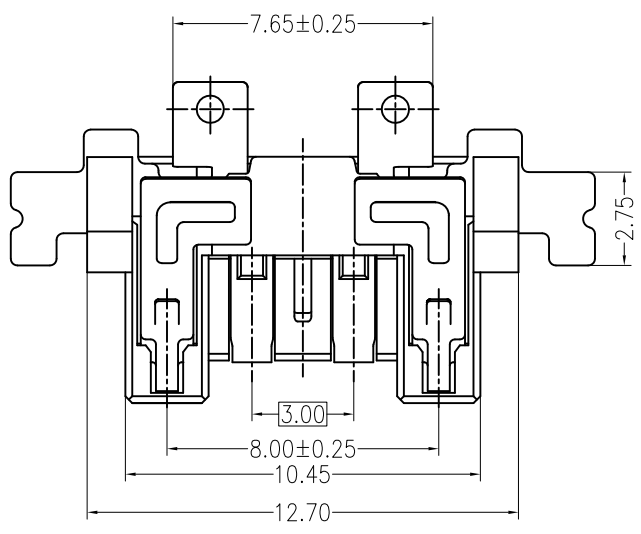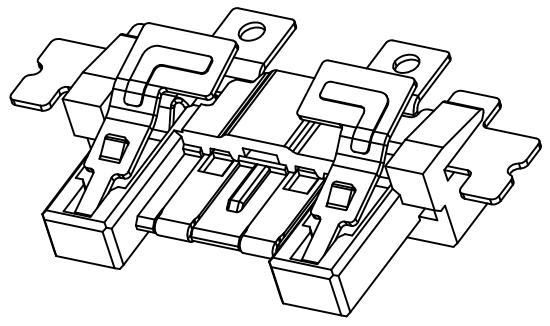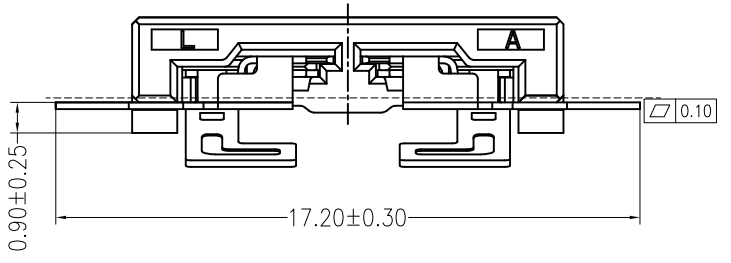

P. C. B LAYOUT

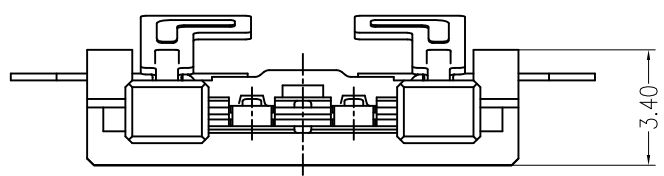






广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.		TITLE: 3.0mm Pitch BTB SMT TYPE	
		PART NO.: B3002G-02-F3MB1-R	
GENERAL TOLERANCE X. ± 0.50 X. $\pm 5^{\circ}$ X.X ± 0.30 X.X $\pm 2^{\circ}$ X.XX ± 0.20 X.XX $\pm 1^{\circ}$		USE: CUSTOMER	DWG NO.: GCKH-0854
UNITS: mm		APPD: WangFeng	
		CHKD: Steven	SCALE 1 : 1
		DR: FangSongLe	SHEET 1 / 1

REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	FangSongLe	2020/09/05


Specifications:
 Contact resistance: $\leq 30m\Omega$
 Insulation resistance: $\geq 1000M\Omega$
 Rated voltage: 200V AC DC
 Rated current: 1.0A AC DC
 Withstand Voltage: 1000V AC/minute
 Temperature Range: $-25^{\circ}C \sim +105^{\circ}C$
 Housing: LCP UL94V-0, BEIGE
 Contacts: Phosphor Bronze / MATTE Sn


ORDER INFORMATION:

PART No. B3002M-02-F2KB1-R		PACKAGING: R=REEL
No. OF CIRCUITS: 02	PLASTIC MATERIAL: F2K=LCP	Metal code: 1=Phosphor Bronze
		PLATING: B=MATTE Sn

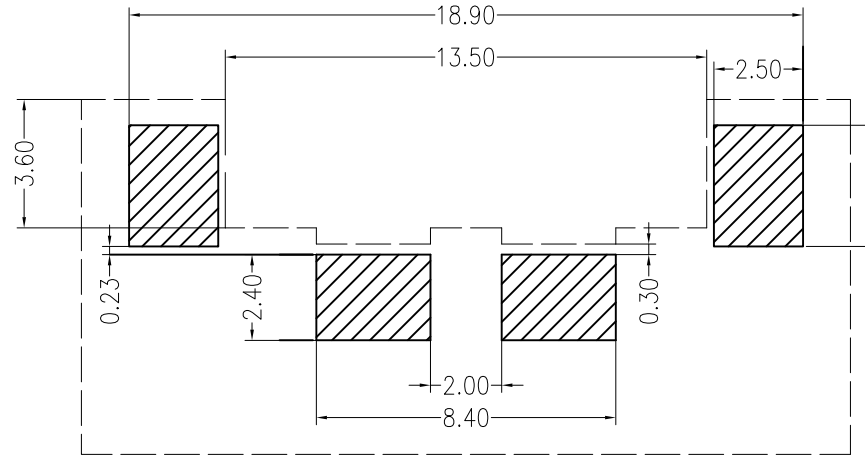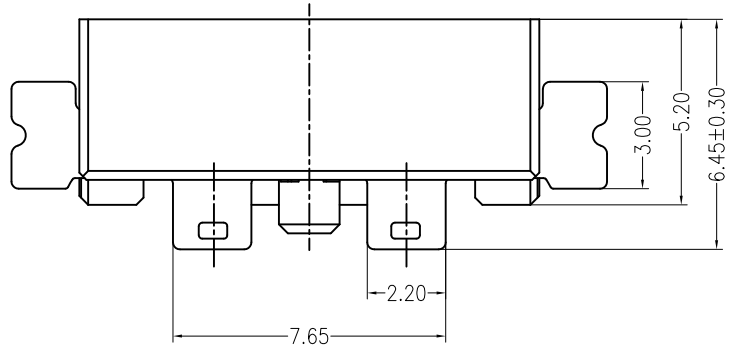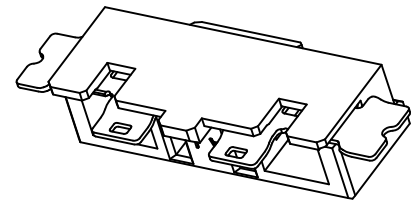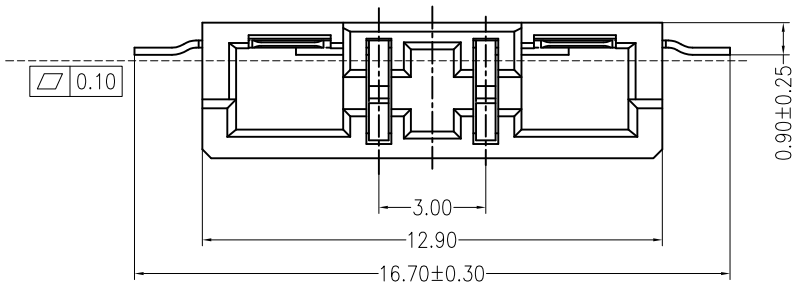

P. C. B LAYOUT

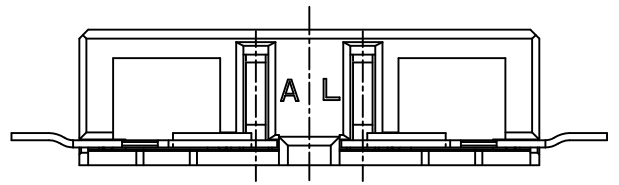

 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.		TITLE: 3.0mm Pitch BTB SMT TYPE	
GENERAL TOLERANCE X. ±0.50 X. ±5° X.X ±0.30 X.X ±2° X.XX ±0.20 X.XX ±1°		PART NO.: B3002M-02-F2KB1-R	
UNITS: mm		DWG NO.: GCKH-0855	
USE: CUSTOMER APPD: WangFeng CHKD: Steven DR: FangSongLe		SCALE: 1 : 1 SHEET: 1 / 1	