

A

B




C

D


E

F


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A	-	NEW RELEASE	吴丹平	2015.07.01

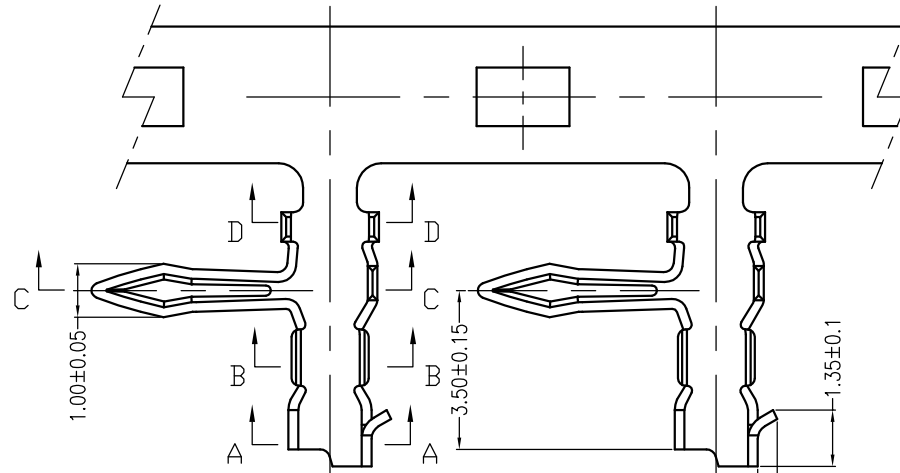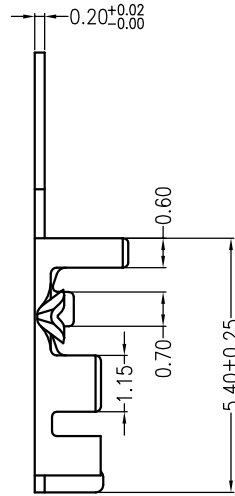


A-A



B-B

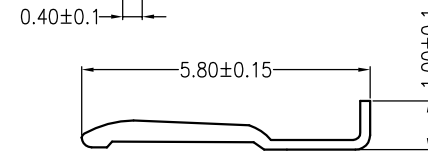

C-C



D-D

备注:

1. 材质: 磷青铜
2. 电镀表面处理: 光亮锡
3. 冲制件表面应光洁平整无毛刺及裂痕;
4. 零件折弯处不得有机械损伤,
切口处毛刺 <0.03 ;
5. 材料有害物质控制需符合RoSH标准。
6. 物料说明:

Ordering Information & Specification:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
B2002T-PA	AWG #22~#30	1.30mm(max)	Phosphor bronze	Tin-plated	12,000 pcs



广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TITLE: -

X.±0.2 X.±0.5°

USE:
MANUFACTURE

PART NO.:

.X±0.10 .X±0.3°

APPD:
邵敬和

B2002端子

.XX±0.05 .XX±0.2°

CHKD:
田峰

DWG NO.:

GCDZ-0019

-- --

DR: 吴丹平

SCALE

1 : 1

SHEET

1 / 1

UNITS:
mm

A

B




C

D



E

F

REV	DESIGN	DATE
A0	吴丹平	2017.03.23
-	-	-

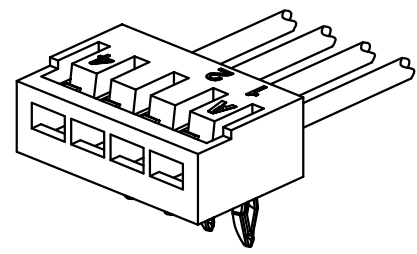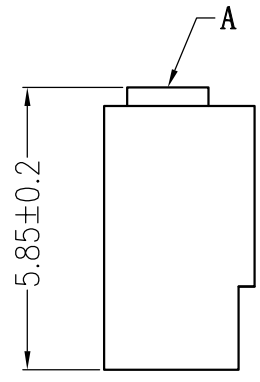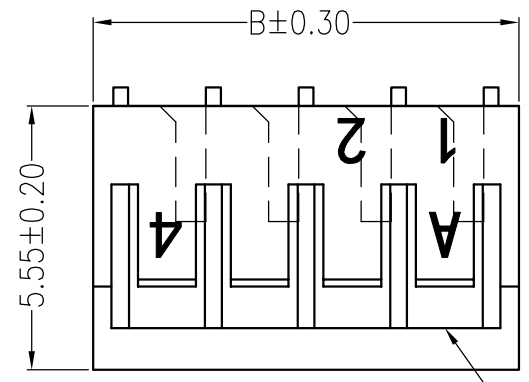

Circuit 1

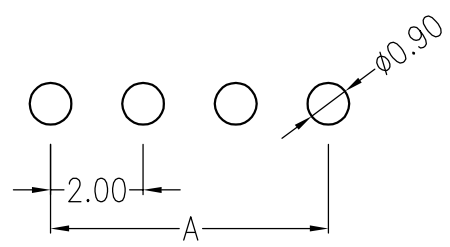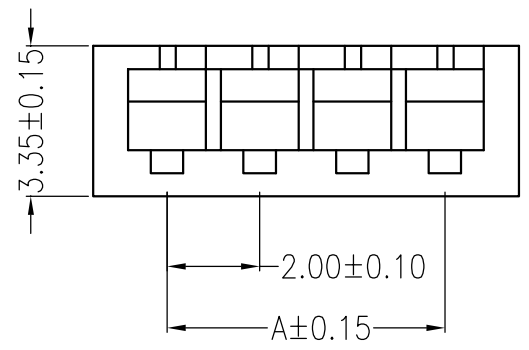

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

主要技术参数 Main Specifications

- 线数 (Poles): 02 to 16
- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 2.0A AC DC
- 耐电压 (Withstand Voltage): 800V AC/minute
- 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

B2002Y--A6W-P**

PART No.	No. OF CIRCUITS:	PACKAGING: P=PE PLASTIC MATERIAL: A6W=PA66 (WHITE)
02~13		

Circuits	Dimensions (mm)	
	A	B
02	2.00	4.70
03	4.00	6.70
04	6.00	8.70
05	8.00	10.70
06	10.00	12.70
07	12.00	14.70
08	14.00	16.70
09	16.00	18.70
10	18.00	20.70
11	20.00	22.70
12	22.00	24.70
13	24.00	26.70
14	26.00	28.70

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
A	HOUSING	1 PCS	PA66	UL 94V-0, COLOR:WHITE
广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.				
X.±0.5				USE: CUSTOMER
.X±0.3				
.XX±0.25				APPD: 邵敬和
--				CHKD: 曾令青
⊕				DR: 蒋建银
UNITS: mm				
TITLE: -				PART NO.: B2002Y-**-A6W-P
2.00mm PITCH 90°HOUSING				
DWG NO.: GCKH-0586				
SCALE 1 : 1			SHEET 1 / 1	