

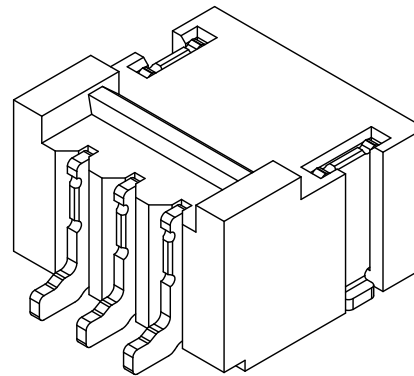
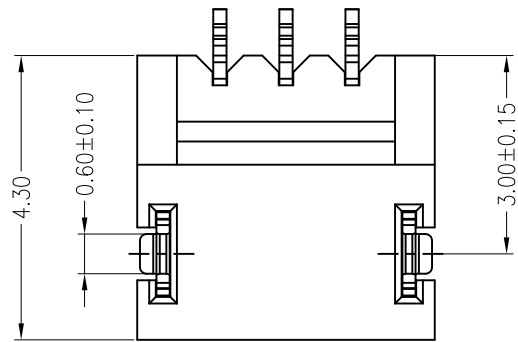



REV	DESCRIPTION	DESIGN	DATE
A0	NEW RELEASE	Steven	2019/05/09

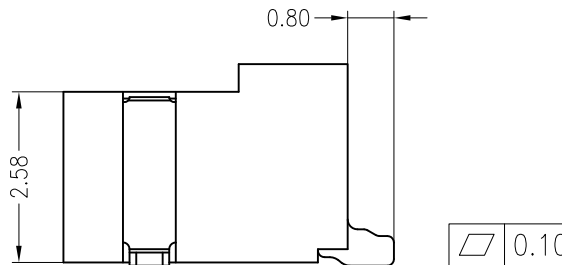

Specifications:
 Poles: 02 to 20
 Contact resistance: $\leq 20m\Omega$
 Insulation resistance: $\geq 100M\Omega$
 Rated voltage: 125V AC DC
 Rated current: 1.0A AC DC
 Withstand Voltage: 500V AC/minute
 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$
 Housing: PA6T UL94V-0, Natural
 Contacts: PhosphorBronze/Matte Sn-plated
 Solder Tabs: Brass/Matte Sn-plated

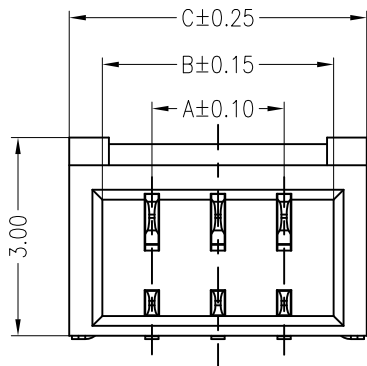

ORDER INFORMATION:
A1004AWR--C1MB1-R**
 PART No. _____
 No.OF CIRCUITS: 02-20
 PLASTIC MATERIAL: C1M=PA6T
 PACKAGING: R=REEL
 Metl code: 1=PhosphorBronze
 PLATING: B=Matte Sn

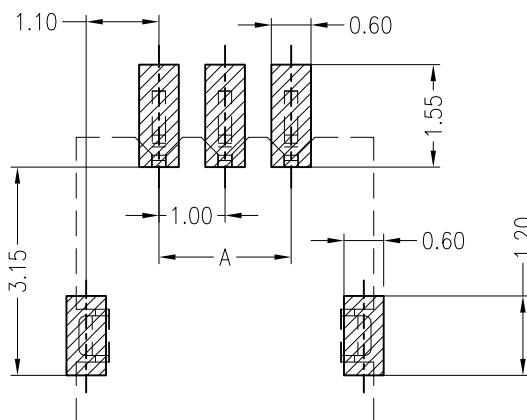

PCB LAYOUT(Tolerance:±0.05)

孔位	尺寸	A	B	C	孔位	尺寸	A	B	C
2P		1.00	2.50	3.50	12P		11.00	12.5	13.5
3P		2.00	3.50	4.50	*13P		12.00	13.5	14.5
4P		3.00	4.50	5.50	*14P		13.00	14.5	15.5
5P		4.00	5.50	6.50	*15P		14.00	15.5	16.5
6P		5.00	6.50	7.50	*16P		15.00	16.5	17.5
7P		6.00	7.50	8.50	*17P		16.00	17.5	18.5
8P		7.00	8.50	9.50	*18P		17.00	18.5	19.5
9P		8.00	9.50	10.5	*19P		18.00	19.5	20.5
10P		9.00	10.50	11.5	*20P		19.00	20.5	21.5
*11P		10.00	11.50	12.5					




广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.		TITLE: 1.0 Pitch Wafer 90° SMT	
		PART NO.: A1004AWR-**-C1MB1-R	
GENERAL TOLERANCE		USE: CUSTOMER	
X. ±0.50	X. ±5°	APPD: Wangliang	
X.X ±0.30	X.X ±2°	CHKD: Liuzhengling	
X.XX ±0.20	X.XX ±1°	DR: Steven	
UNITS: mm		SCALE: 1 : 1	
		SHEET: 1 / 1	






REV	DESCRIPTION	DESIGN	DATE
A0	NEW RELEASE	Steven	2019/05/09

线数 (N)	尺寸 mm	
	A	B
2	1.00	2.40
3	2.00	3.40
4	3.00	4.40
5	4.00	5.40
6	5.00	6.40
7	6.00	7.40
8	7.00	8.40
9	8.00	9.40
10	9.00	10.40
11	10.00	11.40
12	11.00	12.40
13	12.00	13.40
14	13.00	14.40
15	14.00	15.40


Specifications:
 Poles: 02 to 15
 Contact resistance: $\leq 20m\Omega$
 Insulation resistance: $\geq 100M\Omega$
 Rated voltage: 125V AC DC
 Rated current: 1.0A AC DC
 Withstand Voltage: 500V AC/minute
 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$
 Housing: PA66 UL94V-0, Natural

ORDER INFORMATION:
 A1004Y-**-A5W-P
 PART No. _____
 No.OF CIRCUITS: _____
 ** _____
 PLASTIC MATERIAL: _____
 A5W=PA66(WHITE) _____
 PACKAGING:
 P=PE


 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.		TITLE: 1.0 Pitch HOUSING	
GENERAL TOLERANCE X. ± 0.50 X. $\pm 5^{\circ}$ X.X ± 0.30 X.X $\pm 2^{\circ}$ X.XX ± 0.20 X.XX $\pm 1^{\circ}$		PART NO.: A1004Y-**-A5W-P	
USE: CUSTOMER APPD: Wangliang CHKD: Zenglingqing		DWG NO.: GCCP-0829	
UNITS: mm		DR: Steven	
 		SCALE 1 : 1	
		SHEET 1 / 1	

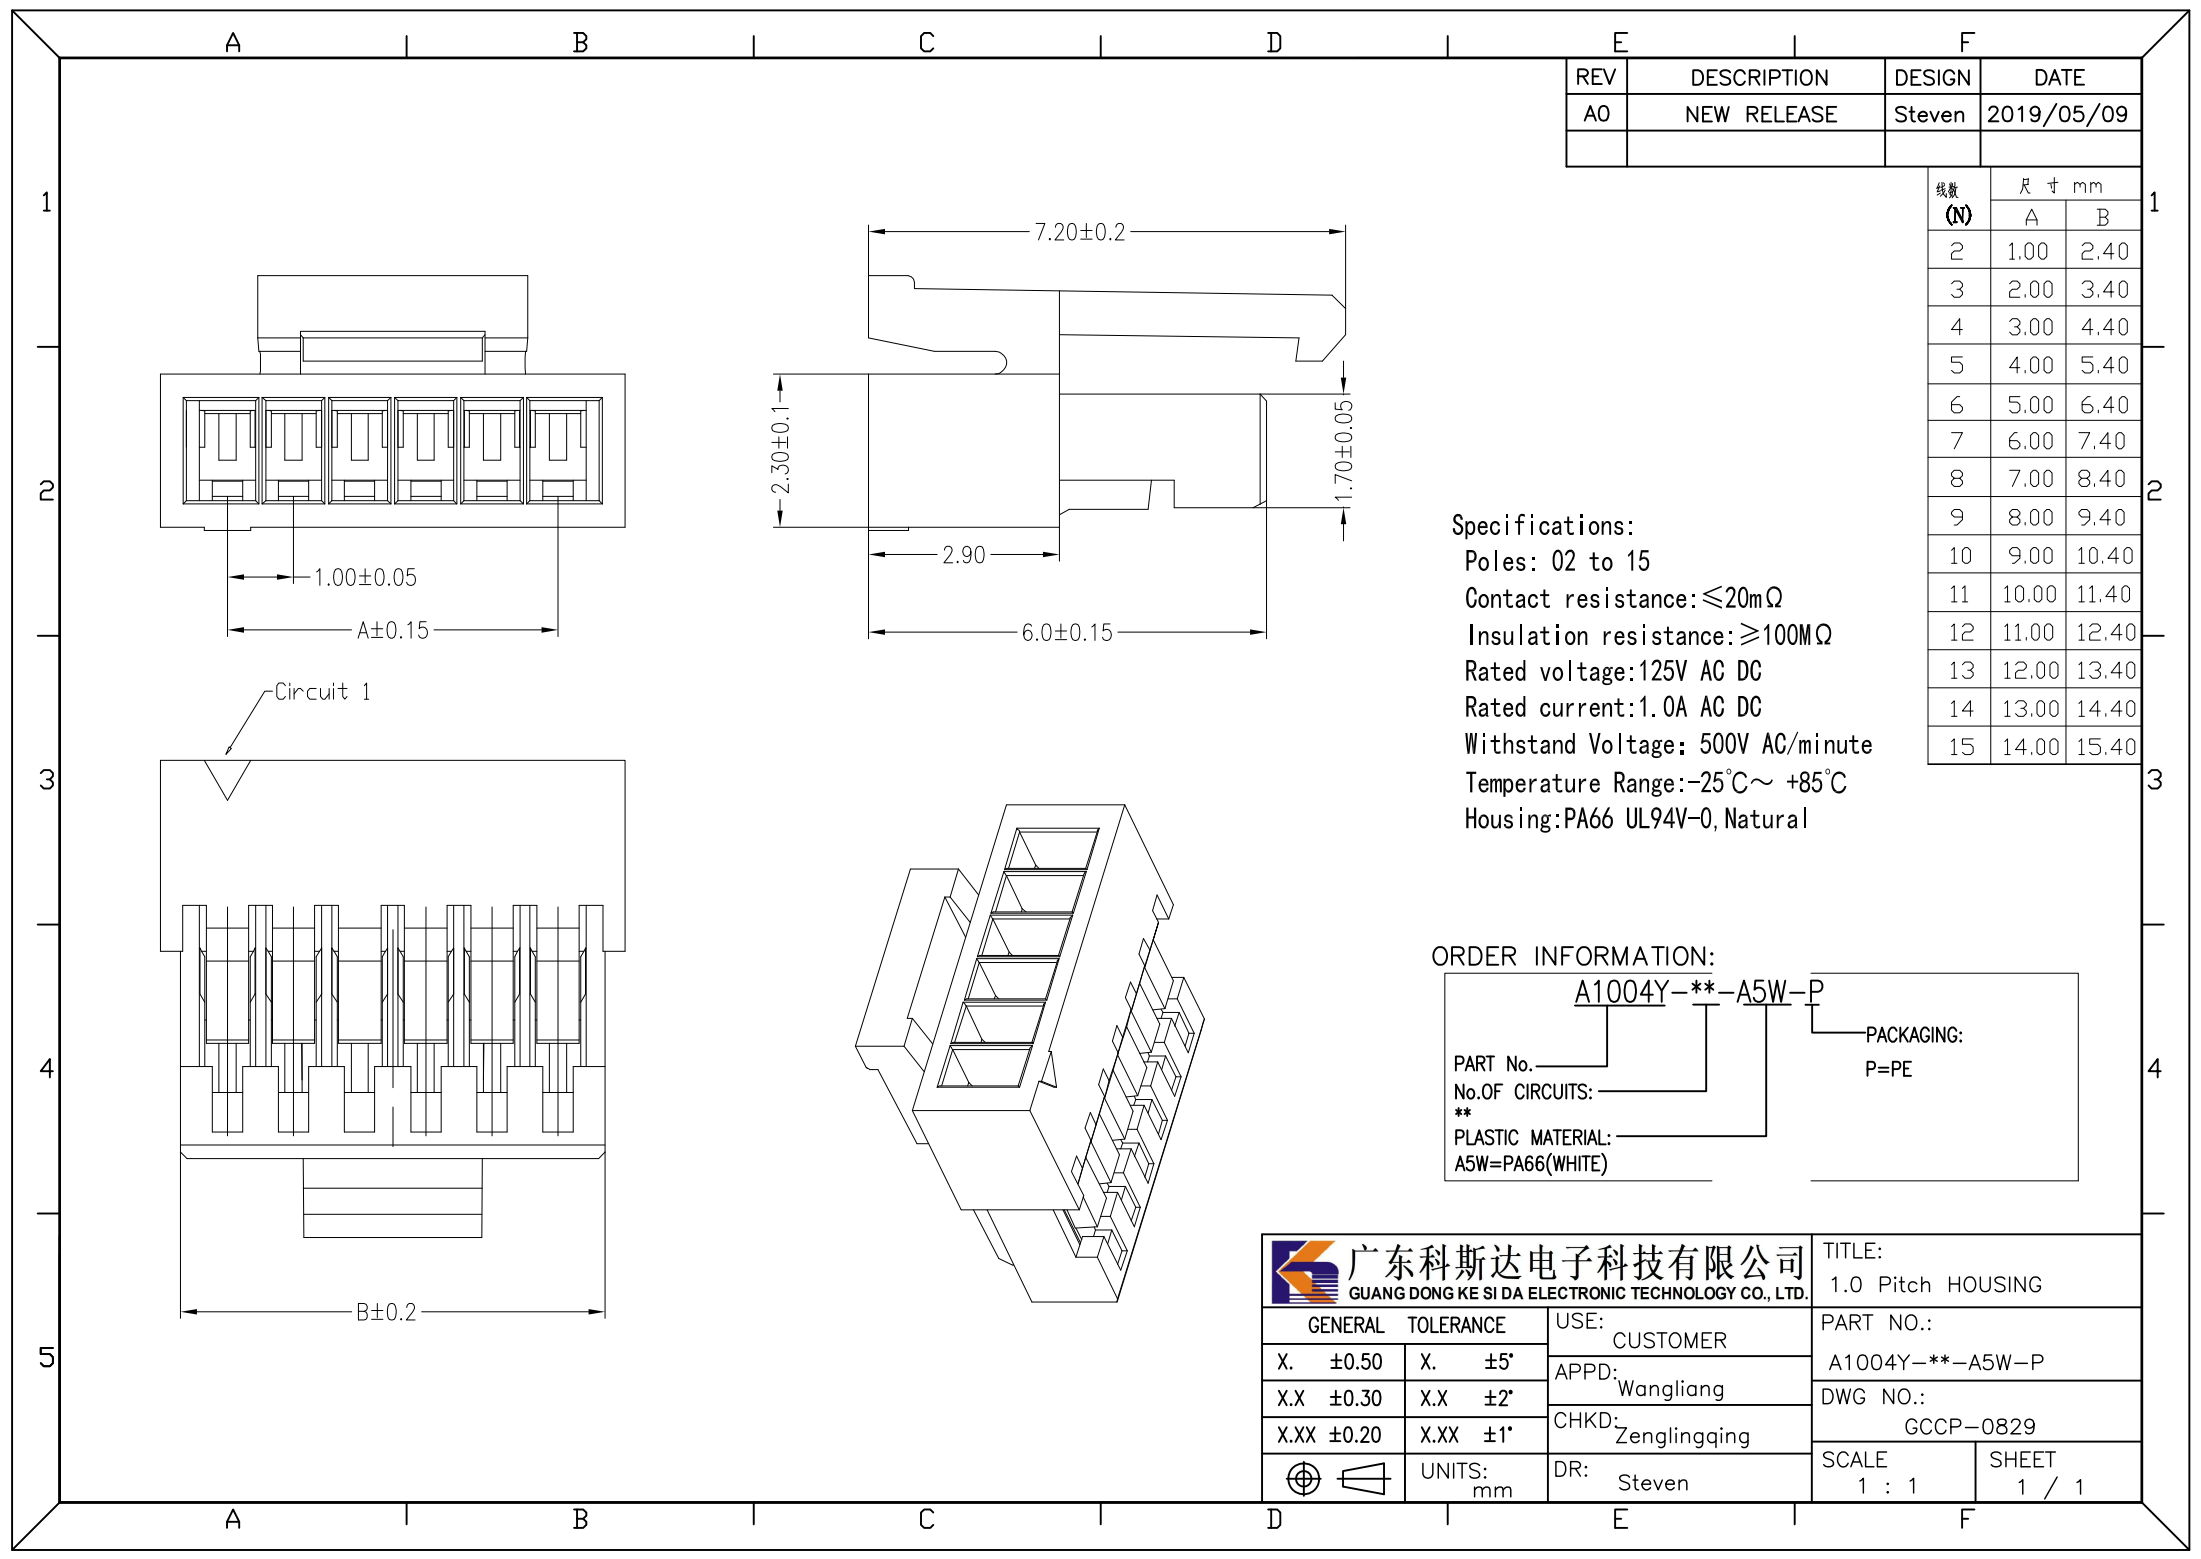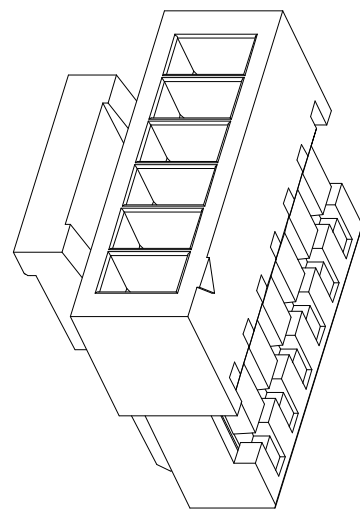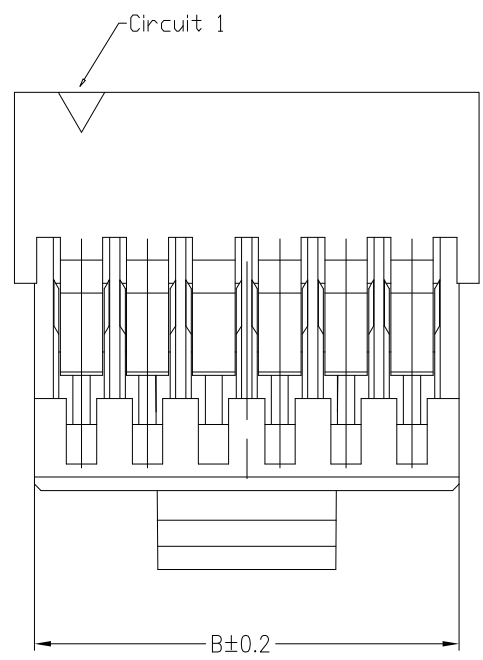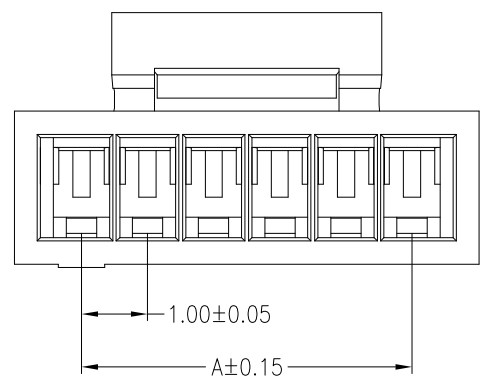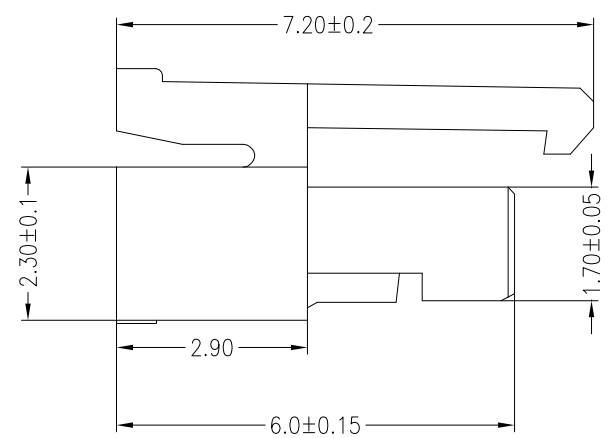


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A		Release	蒋建银	2019.05.22

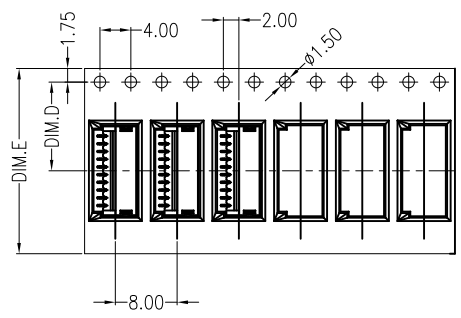



2~15 CONTACTS

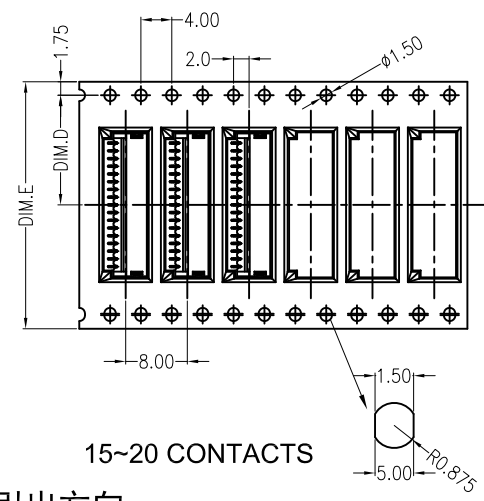


15~20 CONTACTS

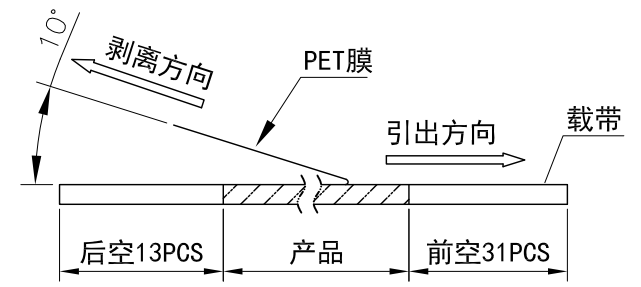


(PET膜剥离示意图)

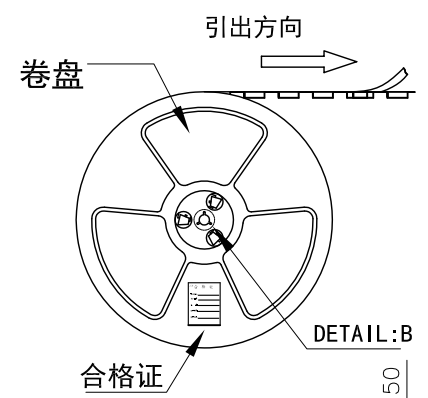


产品引出方向



装*盘 (参考列表一)

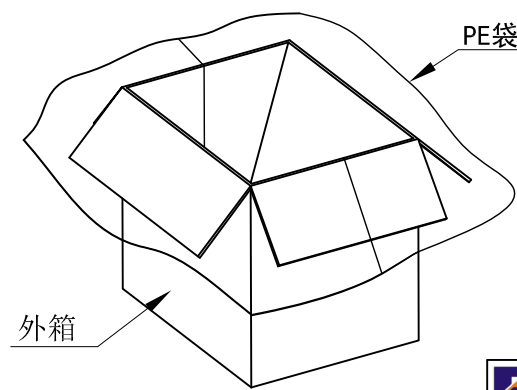

外箱

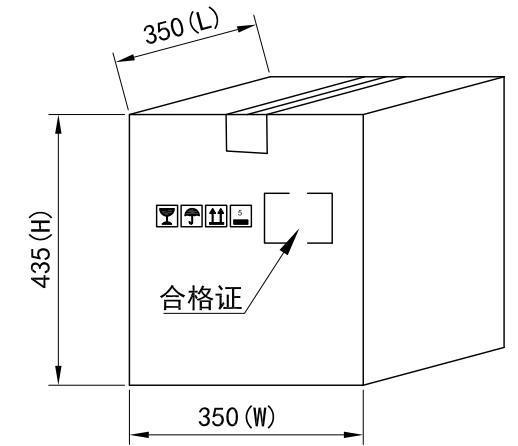

列表一

Circuits	DIM. D	DIM. E	Q'ty/Reel	Packing (Reel/Caton)
2 PIN	5.5	12	2500PCS	25/Reel
3~7PIN	7.5	16	2500PCS	20/Reel
8~15PIN	11.5	24	2500PCS	15/Reel
16~20PIN	14.2	32	2500PCS	11/Reel

包装说明:

- 把成品包入卷盘中，每盘装2500PCS，卷盘上贴上合格证，将装好产品的卷盘放进外箱中，外箱内先套一个大PE袋，外箱上贴贴上合格证。
- 所有材料有害物控制需符合RoHS标准。

广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

X.± 0.5	X.±'	USE: MANUFACTURE
.X± 0.3	.X±'	APPD: 王锋
.XX± 0.25	.XX±'	CHKD: 曾令青
--	--	DR: 蒋建银
	UNITS: mm	

TITLE:	
PART NO.: A1004AWR卷装规范	
DWG NO.: GCBZ-0819	
SCALE: 1 : 1	SHEET: 1 / 1