
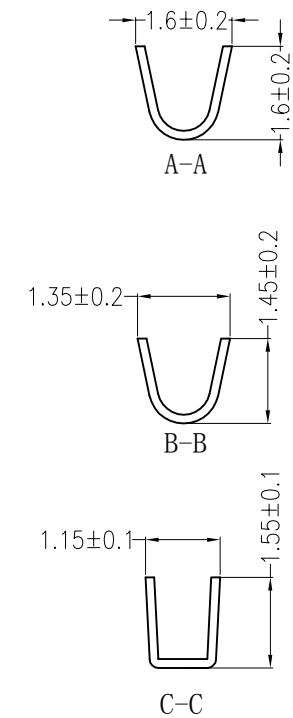
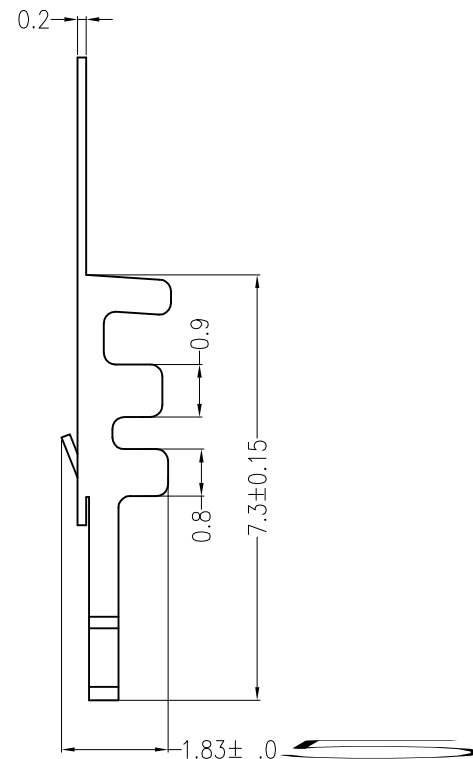


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	蒋建银	2018.01.18



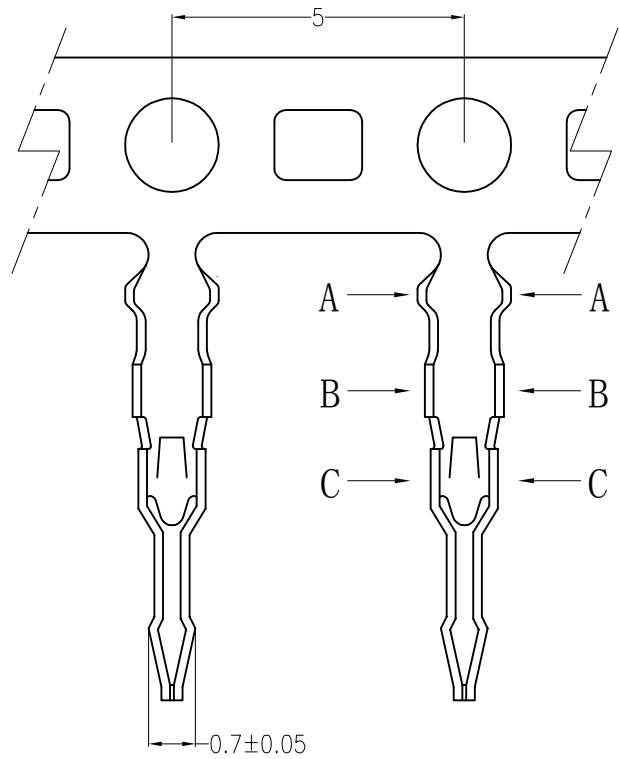


Ordering Information & Specification:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
B1501T-PA	AWG #26~#30	1.10mm(max)	Phosphor bronze	Tin-plated	/

广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.			TITLE:	
X.±0.5	X.±5'	USE: CUSTOMER	PART NO.:	
.X±0.3	.X±2'		B1501T-PA	
.XX±0.25	.XX±1'	APPD: 邵敬和	DWG NO.:	
--	--	CHKD: 田峰	GCDZ-0017	
		UNITS: mm	DR: 蒋建银	SCALE 1 : 1
				SHEET 1 / 1

REV	DESCRIPTION	DESIGN	DATE
A0	Release	周秀龙	2017.11.22

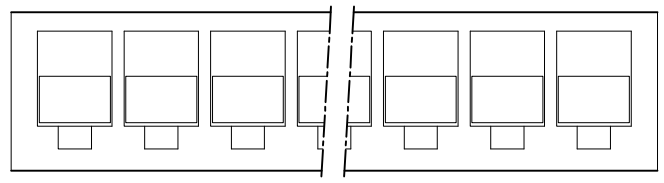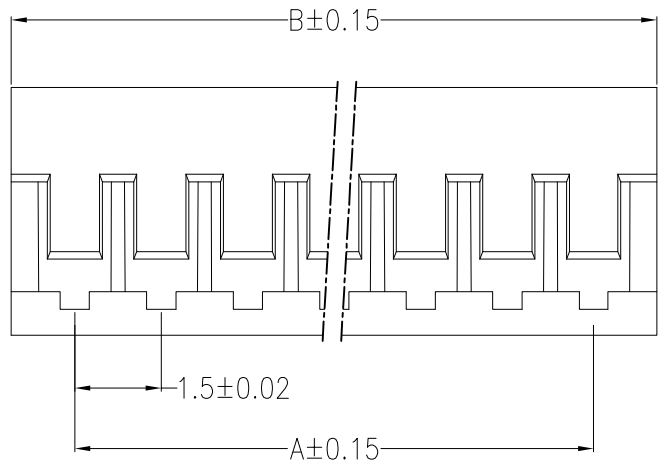

适用线规:32AWG~26AWG


主要技术参数 Main Specifications

- 线 数 (Poles): 02 to 20
- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 1.0A AC DC
- 耐 电 压 (Withstand Voltage): 500V AC/minute
- 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

B1501Y-**-A5W-P	
PART No.	PACKAGING: P=PE
No. OF CIRCUITS: 02~20	PLASTIC MATERIAL: A5W=PA66 (WHITE)

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	A	B		A	B
02	1.50	3.70	12	16.50	18.70
03	3.00	5.20	13	18.00	20.20
04	4.50	6.70	14	19.50	21.70
05	6.00	8.20	15	21.00	23.20
06	7.50	9.70	16	22.50	24.70
07	9.00	11.20	17	24.00	26.20
08	10.50	12.70	18	25.50	27.70
09	12.00	14.20	19	27.00	29.20
10	13.50	15.70	20	28.50	30.70
11	15.00	17.20			

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
A	PEDESTAL	1 PCS	PA66	COLOR:Beige
 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.				
TITLE: -				1.5mmPITCH Housing
X.±0.5	X.±5'	USE:	CUSTOMER	
.X±0.3	.X±2'	APPD:	邵敬和	
.XX±0.25	.XX±1'	CHKD:	田峰	
--	--	DR:	周秀龙	
UNITS: mm		SCALE	SHEET	
		1 : 1	1 / 1	