



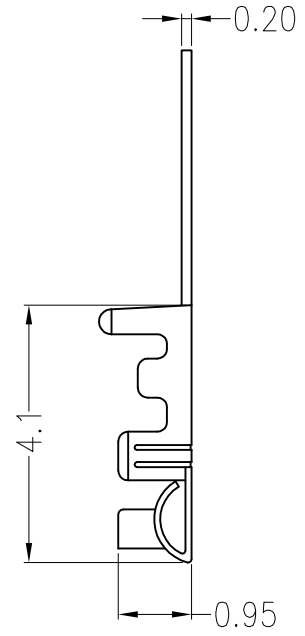


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	蒋建银	2018.01.18



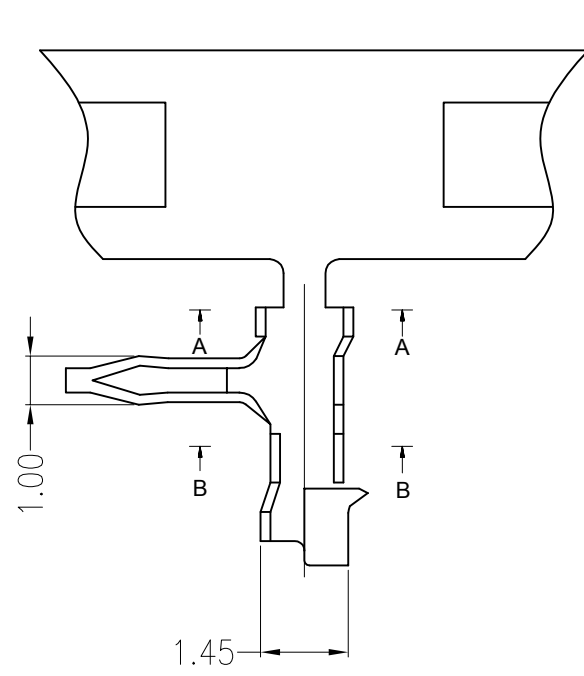


Ordering Information & Specification:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
B1502T-PA	AWG #26~#30	0.7~1.1mm	Phosphor bronze	Tin-plated	/

<b>广东科斯达电子科技有限公司</b> GUANGDONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.		TITLE:	
X.±0.5	X.±5'	USE: CUSTOMER	PART NO.:
.X±0.3	.X±2'	APPD: 邵敬和	B1502T
.XX±0.25	.XX±1'	CHKD: 田峰	DWG NO.:
--	--	DR: 蒋建银	GCDZ-0046
⊕	∠	UNITS: mm	SCALE
			1 : 1
			SHEET
			1 / 1

REV	DESCRIPTION	DESIGN	DATE
A0	Release	蒋建银	2018.01.18

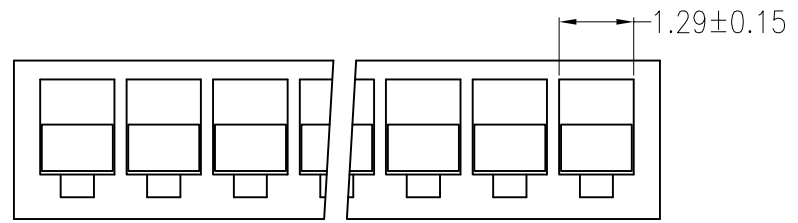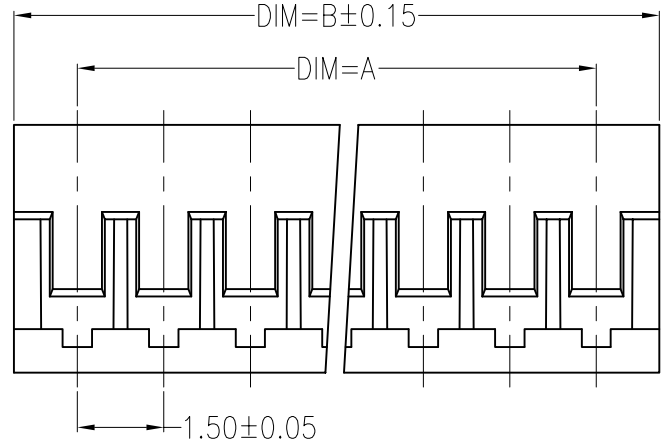

**主要技术参数 Main Specifications**

线 数 (Poles): 02 to 20  
 接触电阻 (Contact resistance):  $\leq 20m\Omega$   
 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$   
 额定电压 (Rated voltage): 250V AC DC  
 额定电流 (Rated current): 1.0A AC DC  
 耐 电 压 (Withstand Voltage): 500V AC/minute  
 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$


**ORDER INFORMATION:**

**B1502Y-\*\*-A5W-P**

PART No. \_\_\_\_\_  
 No. OF CIRCUITS: \_\_\_\_\_  
 PACKAGING: P=PE  
 PLASTIC MATERIAL: A5W=PA66 (WHITE)

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	DIM=A	DIM=B		DIM=A	DIM=B
02	1.50	3.70	10	13.50	15.70
03	3.00	5.20	11	15.00	17.20
04	4.50	6.70	12	16.50	18.70
05	6.00	8.20	13	18.00	20.20
06	7.50	9.70	14	19.50	21.70
07	9.00	11.20	15	21.00	23.20
08	10.50	12.70	16	22.50	24.70
09	12.00	14.20	17	24.00	26.20
10	13.50	15.70	18	25.50	27.70
11	15.00	17.20	19	27.00	29.20
12	16.50	18.70	20	28.50	30.70

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
A	PEDESTAL	1 PCS	PA66	COLOR:Beige


**广东科斯达电子科技有限公司**  
 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TITLE: -  
 1.5mm PITCH Housing  
 PART NO.: B1502Y-\*\*-A5W-P  
 DWG NO.: GCCP-0584  
 SCALE: 1 : 1  
 SHEET: 1 / 1

X.±0.5 X.±5' USE: CUSTOMER  
 .X±0.3 .X±2' APPD: 邵敬和  
 .XX±0.25 .XX±1' CHKD: 田峰  
 -- -- DR: 蒋建银

UNITS: mm