
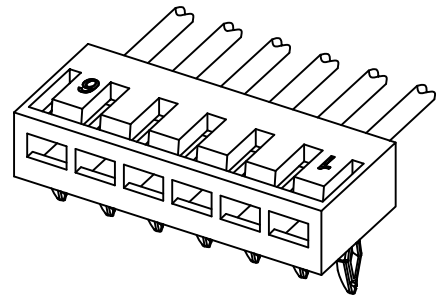
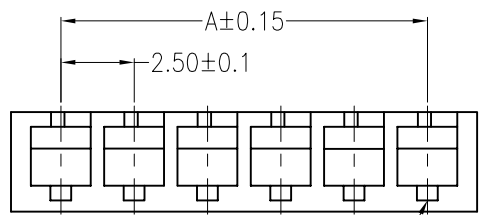
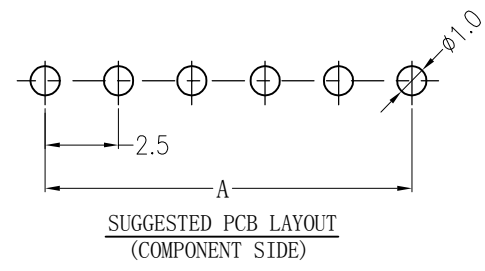



REV	DESCRIPTION	DESIGN	DATE
A0	Release	-	-

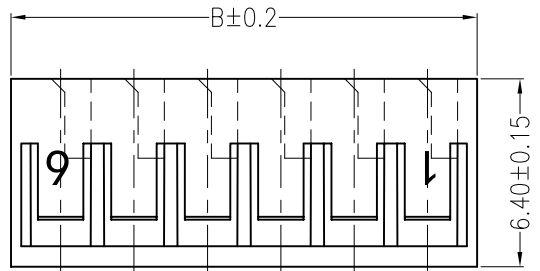

**主要技术参数 Main Specifications**

- 线数 (Poles): 02 to 18
- 接触电阻 (Contact resistance):  $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 3.0A AC DC
- 耐电压 (Withstand Voltage): 800V AC/minute
- 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

**ORDER INFORMATION:**

**B2502Y-\*\*-A6W-P**

PART No.      PACKAGING: P=PE

No. OF CIRCUITS:      PLASTIC MATERIAL: A6W=PA66 (WHITE)

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	A	B		A	B
02	2.50	5.90	10	22.50	25.90
03	5.00	8.40	11	25.00	28.40
04	7.50	10.90	12	27.50	30.90
05	10.00	13.40	13	30.00	33.40
06	12.50	15.90	14	32.50	35.90
07	15.00	18.40	15	35.00	38.40
08	17.50	20.90	16	37.50	40.90
09	20.00	23.40			

A	PEDESTAL	1 PCS	PA66(UL94V-0)	COLOR:Beige
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
<b>广东科斯达电子科技有限公司</b> GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.			TITLE: - 2.5mmPITCH 90°WAFER Housing	
X.±0.5	X.±5'	USE:	PART NO.:	
.X±0.3	.X±2'	CUSTOMER	B2502Y-**-A6W-P	
.XX±0.25	.XX±1'	APPD:	DWG NO.:	
--	--	CHKD:	GCCP-0589	
	UNITS:	DR:	SCALE	SHEET
	mm		1 : 1	1 / 1