

A

B





C

D

E

F

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	吴丹平	2017.06.28

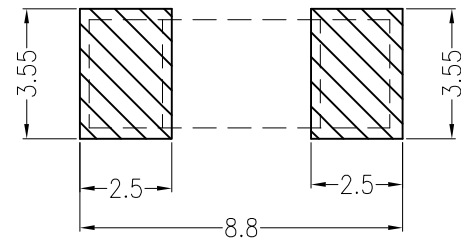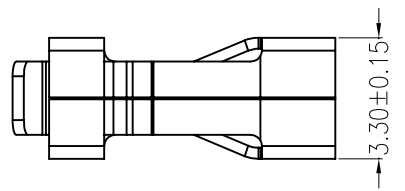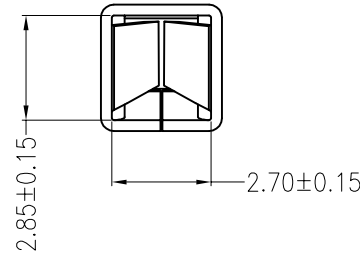
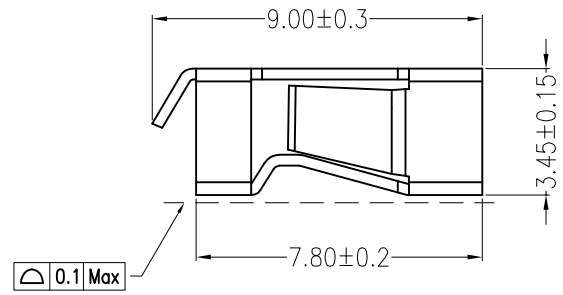


Board Layout

主要技术参数 Main Specifications

线数 (Poles): 01  
 接触电阻 (Contact resistance):  $\leq 20m\Omega$   
 绝缘电阻 (Insulation resistance):  
 额定电压 (Rated voltage): 250 V AC DC  
 额定电流 (Rated current): 3.0A AC DC  
 耐电压 (Withstand Voltage):  
 温度范围 (Temperature Range):  $-45^{\circ}C \sim +125^{\circ}C$

ORDER INFORMATION:

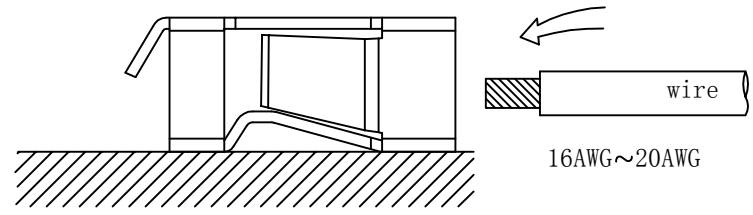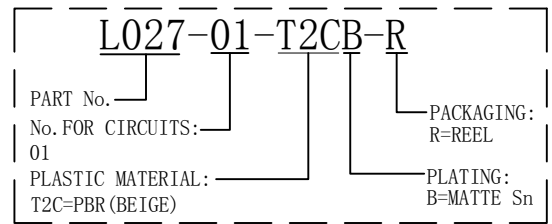

Assembly Layout

C				
B				
A	CONTACT	1 PCS	PhosphorBronze	MATTE Sn-plated
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

<b>广东科斯达电子科技有限公司</b> GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.			TITLE: --	
X.±0.5	X.±5'	USE:	PART NO.:	
.X±0.3	.X±2'	CUSTOMER	L027-01-T2CB-R	
.XX±0.25	.XX±1'	APPD: 邵敬和	DWG NO.:	
--	--	CHKD: 田峰	JKUN-GCCP-0049	
UNITS: mm		DR: 蒋建银	SCALE	SHEET
			1 : 1	1 / 1

A

B

C



D

E



F

REV	DESCRIPTION	DESIGN	DATE
A0	NEW RELEASE	Fangsongle	2019/05/09

1  
2  
3  
4  
5

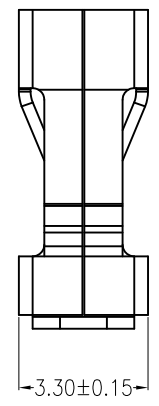

0.1 Max


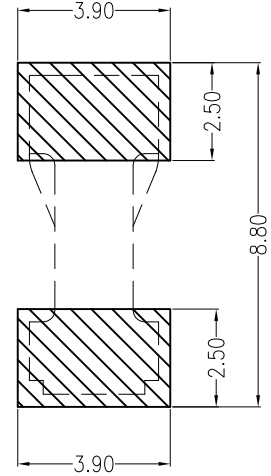
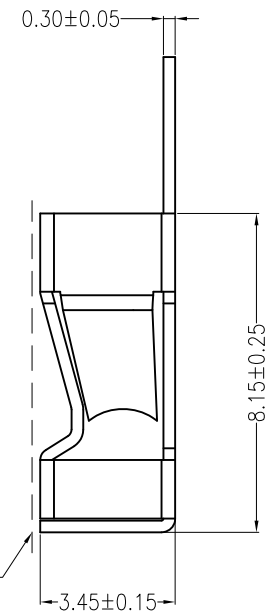


Board Layout

Specifications:

- Contact resistance: ≤20mΩ
- Rated voltage: 250V AC DC
- Rated current: 3.0A AC DC
- Temperature Range: -45°C ~ +125°C
- Contacts: PhosphorBronze/Matte Sn-plated

ORDER INFORMATION:

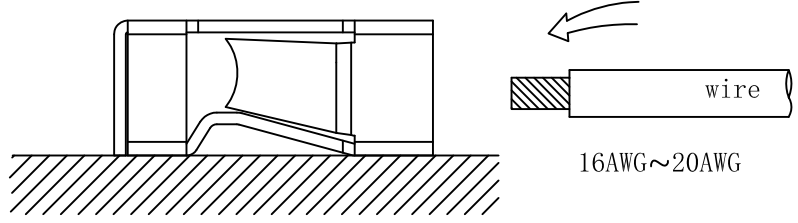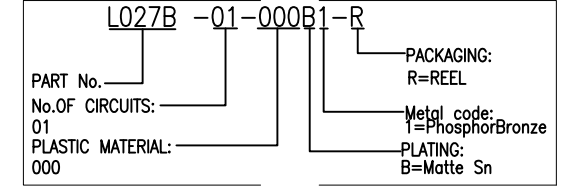

<b>广东科斯达电子科技有限公司</b> GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.		TITLE: -	
GENERAL TOLERANCE X. ±0.50 X. ±5' X.X ±0.30 X.X ±2' X.XX ±0.20 X.XX ±1'		USE: CUSTOMER APPD: Wangliang CHKD: Liuzhengling DR: Fangsongle	PART NO.: L027B-01-000B1-R DWG NO.: GCKH-2055
UNITS: mm	SCALE: 1 : 1 SHEET: 1 / 1		

A B C D E F

A B C D E F