

CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Fido Weng	27/03/09'	ECN09038
B				
C				

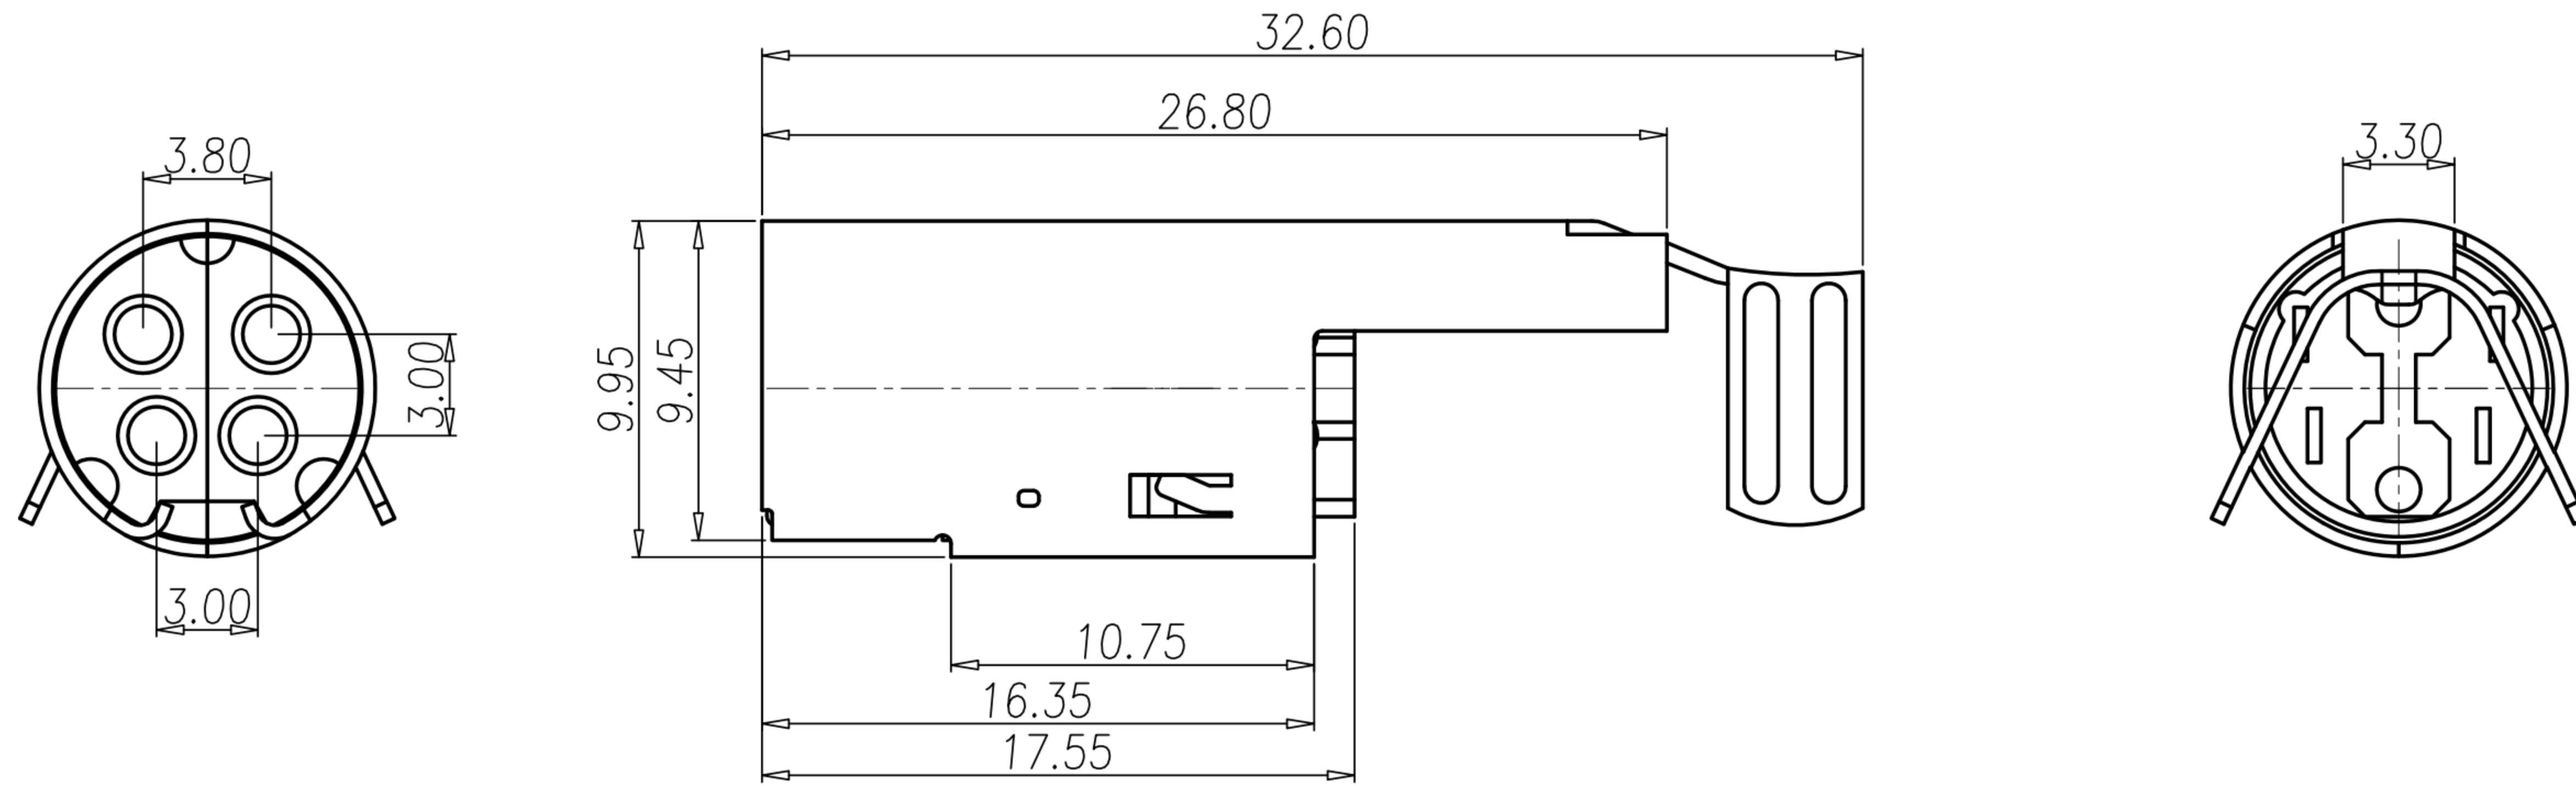


TABLE A

	PD-04F2-03	前黄色後黄色
	PD-04F2-02	前黑色後黑色
	PD-04F2-01	前黑色後黄色
	P/N	HOUSING COLOR

NOTE/備註:

- MATERIAL :
 - HOUSING : PBT UL94V-0 ; COLOR : SEE TABLE A
 - CONTACT: PHOSPHOR BRONZE
 - SHELL : BRASS
- FINISH :
 - CONTACT : TIN 100u" PLATING OVER NICKEL
 - SHELL : NICKEL PLATED 60u" ~ 100u" OVER ALL
- ELECTRICAL SPECIFICATION :
 - Rated current : 5A
 - Voltage :125V
- Environmental :
 - Operation Temperature : -40 °C~85°C

DRAWN	Emily Suen	APP'D	Fido Weng	UNIT	mm	TOLERANCE		广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	TITLE	POWER DIN 4PIN (F)			SHEET	1
CHK'D	Emily Suen			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°			PART NO.	SEE TABLE A	DWG NO.	QC1700	VERSION	