


CUSTOMER DRAWING


REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
△A	RELEASE	Fido Weng	02/03/10*	
△B				
△C				

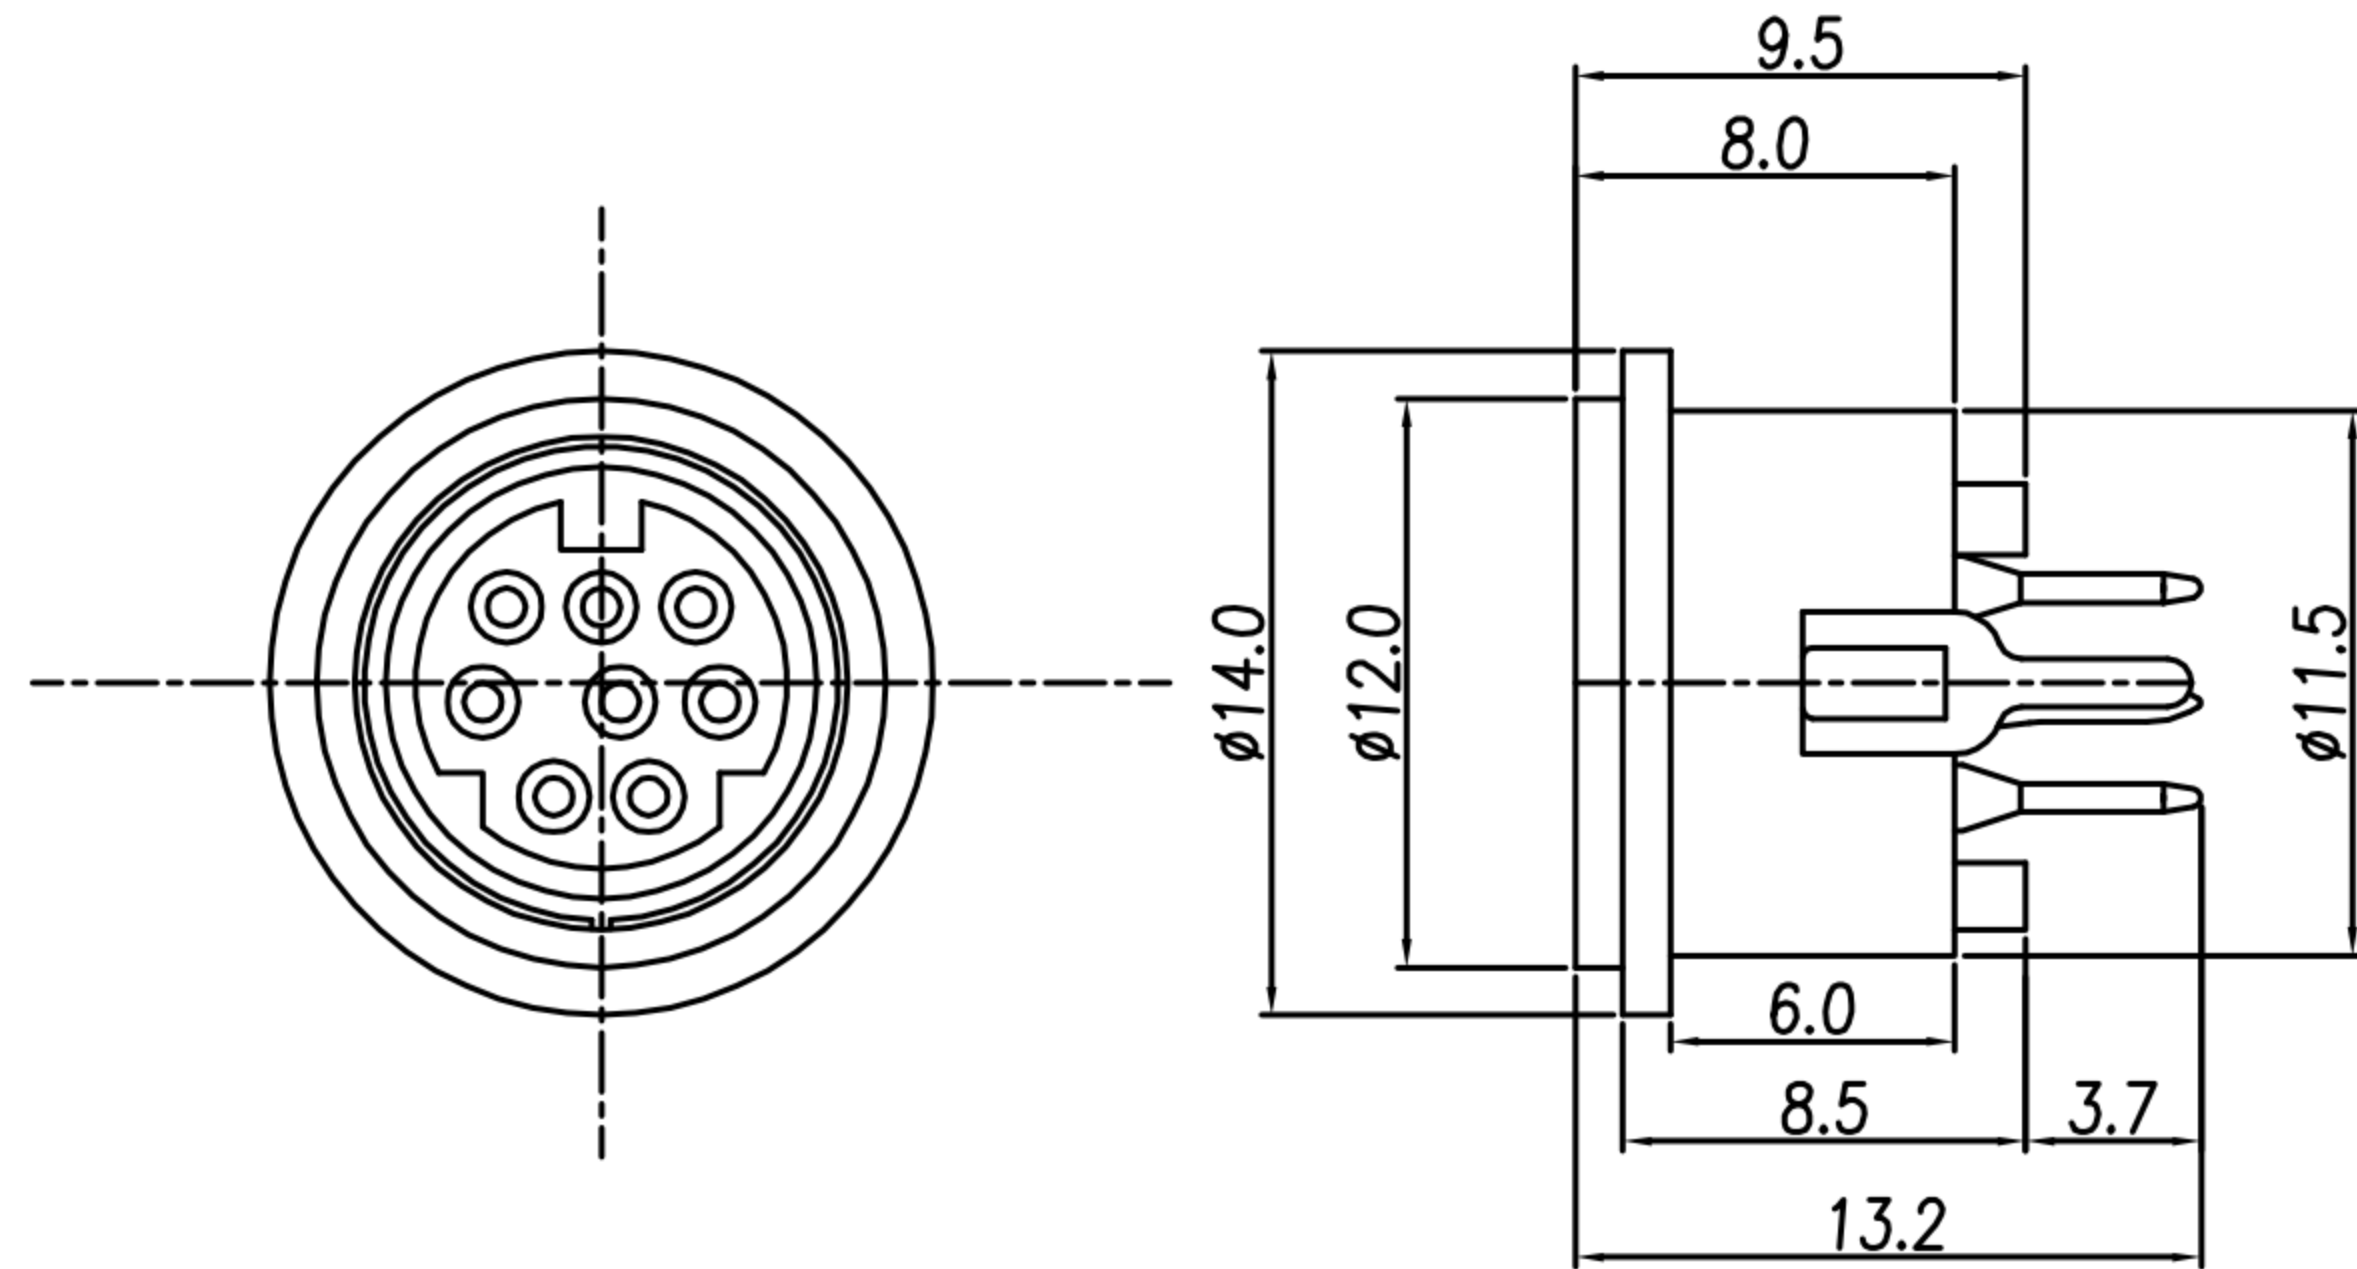

- MATERIAL :
 - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : PHOSPHOR BRONZE
 - 1-3. SHELL : BRASS
- FINISH :
 - 2-1. CONTACT : BRIGHT TIN PLATED
 - 2-2. SHELL : NICKEL PLATED
- ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 2A
 - 3-2. Rated voltage : 12V
- Environmental :
 - 4-1. Operation Temperature : -20℃~85℃

TABLE A

MD-03F3-06-01	MD-04F3-08-11	MD-04F3-02	MD-05F3-01	MD-06F2-05	MD-07F3-07-01	MD-08F3-04

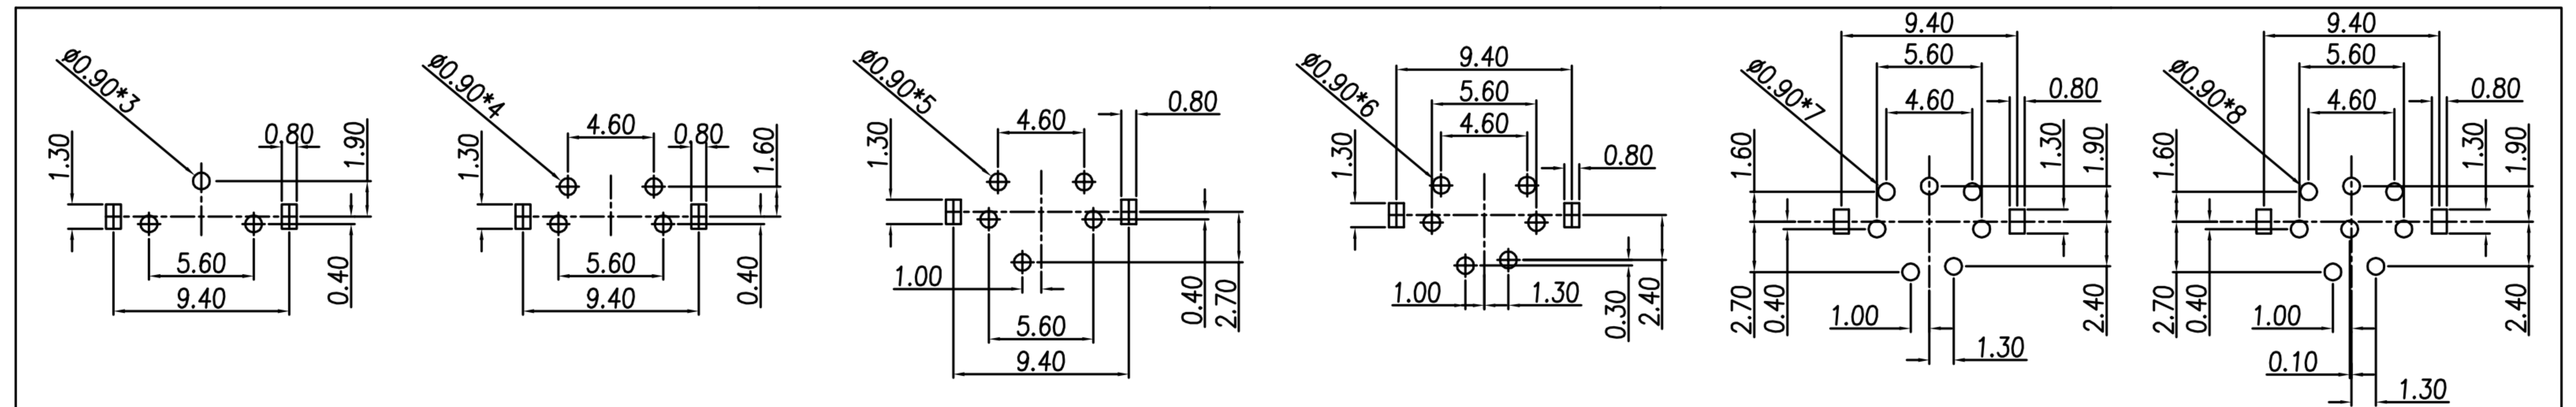

P.C.B LAYOUT (Bottom View)

DRAWN	Ku Chou	APPEND	Emily Suen	UNIT	mm	TOLERANCE		TITLE	MINI DIN (F) 板上直立式180° DIP			SHEET
CHKD	Emily Suen			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°		广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	PART NO.	SEE TABLE A	DWG NO.	QC1285