


REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Fido Weng	28/12/09'	
B	MODIFY HOUSING COLOR	Fido Weng	24/03/16'	
C				

TABLE A

PART NO.	MATERIAL	NUT PLATED	CONTACT FINISH	HOUSING COLOR
WP-04M2-139-11	BRASS	BLACK Cr	GOLD 10u"	BLACK
WP-04M2-115-11	BRASS	Satin Nickel	GOLD 10u"	BLACK
WP-03M2-58-11	BRASS	Satin Nickel	GOLD 10u"	BLACK
WP-02M2-39-11	BRASS	Satin Nickel	GOLD 10u"	BLACK
WP-04M2-113-11	ALUMINUM	ANODIZING (YELLOW)	GOLD FLASH	YELLOW
WP-04M2-112-11	ALUMINUM	ANODIZING (GREEN)	GOLD FLASH	GREEN
WP-04M2-111-11	ALUMINUM	ANODIZING (RED)	GOLD FLASH	RED
WP-04M2-110-11	ALUMINUM	ANODIZING (BLACK)	GOLD FLASH	BLACK
WP-04M2-109-11	ALUMINUM	ANODIZING (BLUE)	GOLD FLASH	BLUE
WP-04M2-108-11	ALUMINUM	ANODIZING (NATURAL COLOR)	GOLD FLASH	WHITE
WP-02M2-20	BRASS	Satin Nickel	GOLD FLASH	BLACK
WP-03M2-18	BRASS	Satin Nickel	GOLD FLASH	BLACK
WP-04M2-74	BRASS	BLACK Cr	GOLD FLASH	BLACK
WP-04M2-38	BRASS	Satin Nickel	GOLD FLASH	BLACK

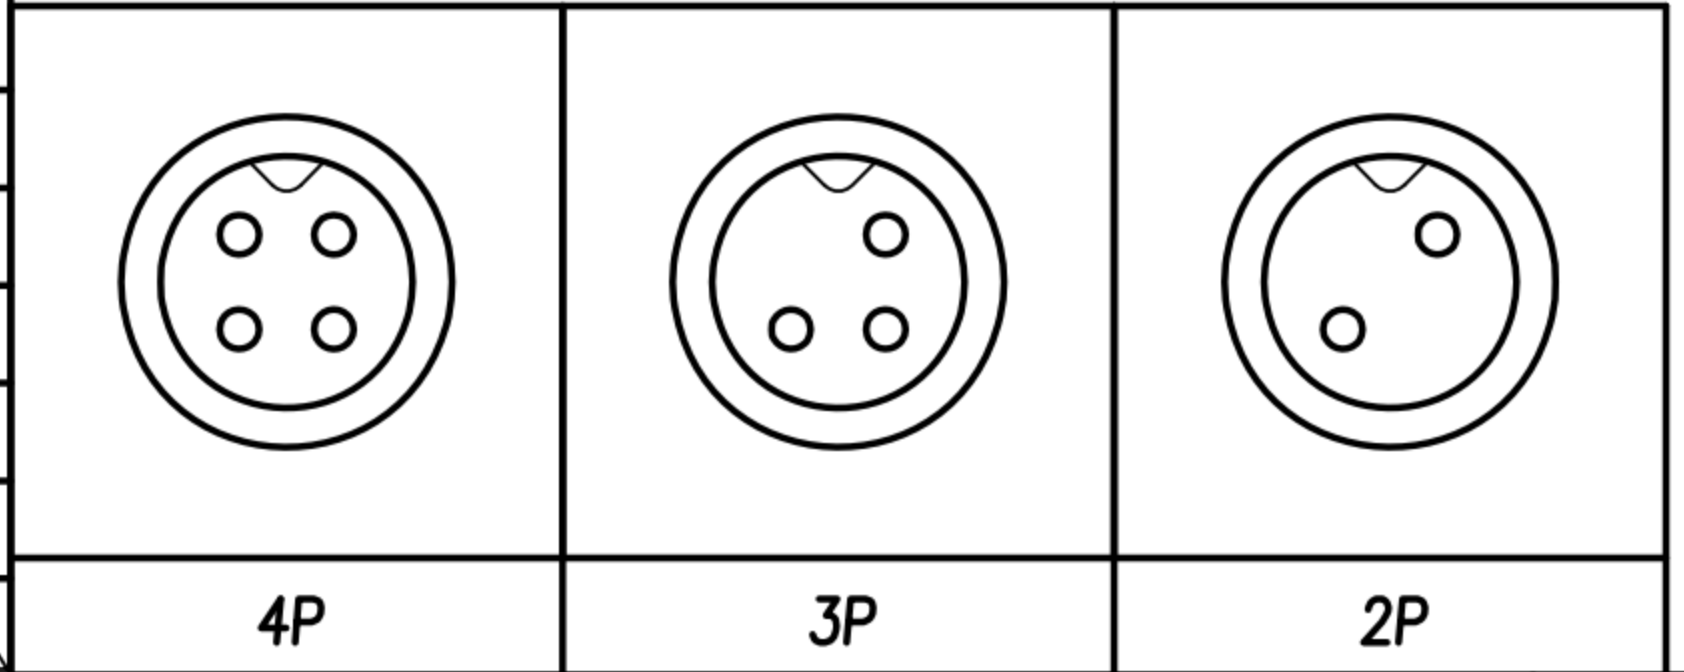

- MATERIAL :
  - HOUSING : TPU ; COLOR : SEE TABLE A
  - CONTACT : BRASS
  - NUT : SEE TABLE A
- FINISH :
  - CONTACT : SEE TABLE A
  - NUT : SEE TABLE A.
- ELECTRICAL SPECIFICATION :
  - Rated current : 1A
  - Rated Voltage : 60V
  - Water proof: IP67
- Environmental :
  - Operation Temperature : -40℃~85℃

DRAWN	Ku Chou	APP'D	Fido Weng	UNIT	mm	TOLERANCE			TITLE	M5(M) 線端插線式			SHEET
CHK'D	Emily Suen			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1'			PART NO.	SEE TABLE A	DWG NO.	QC4591	VERSION B