

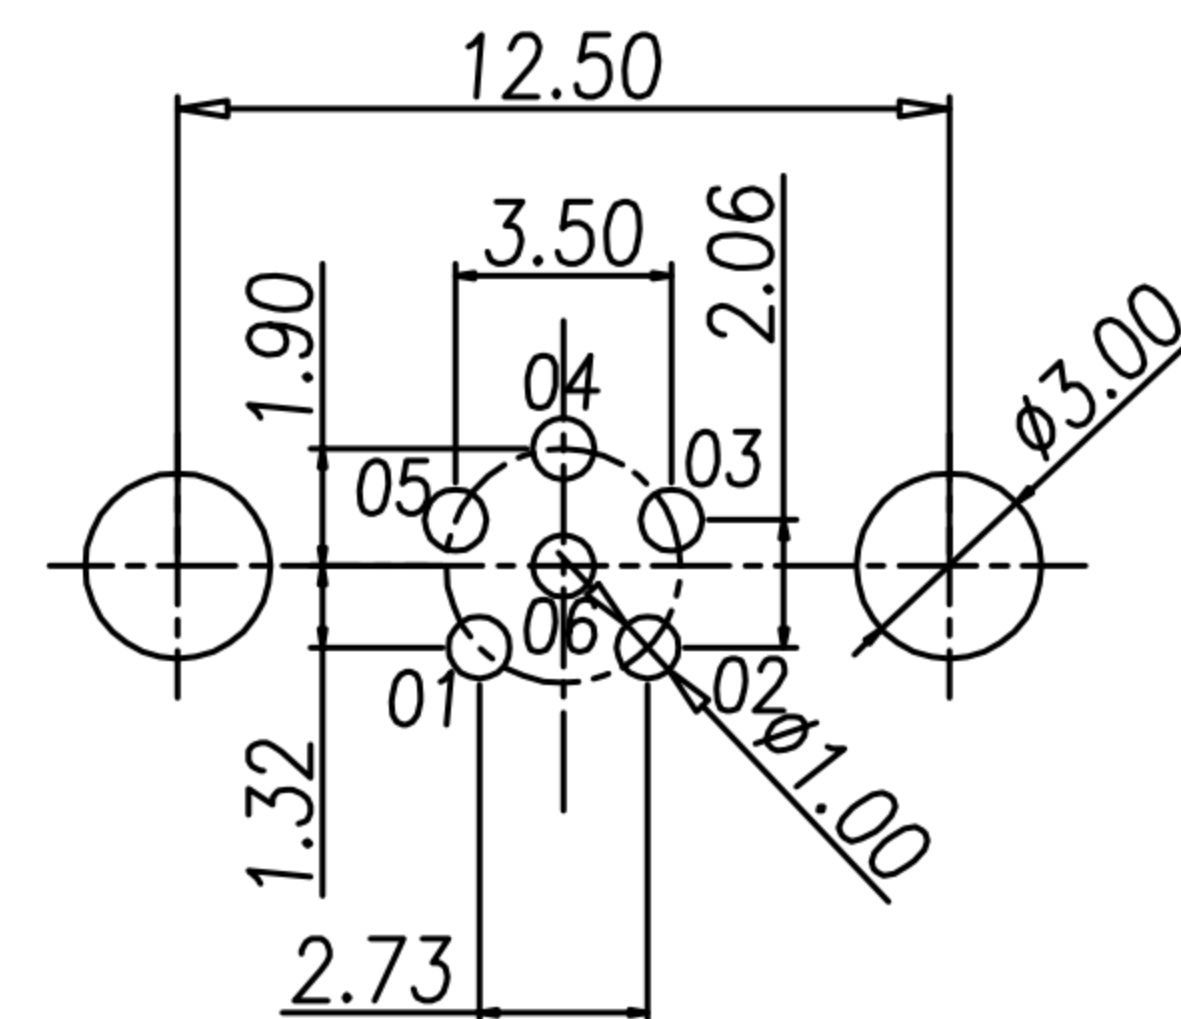
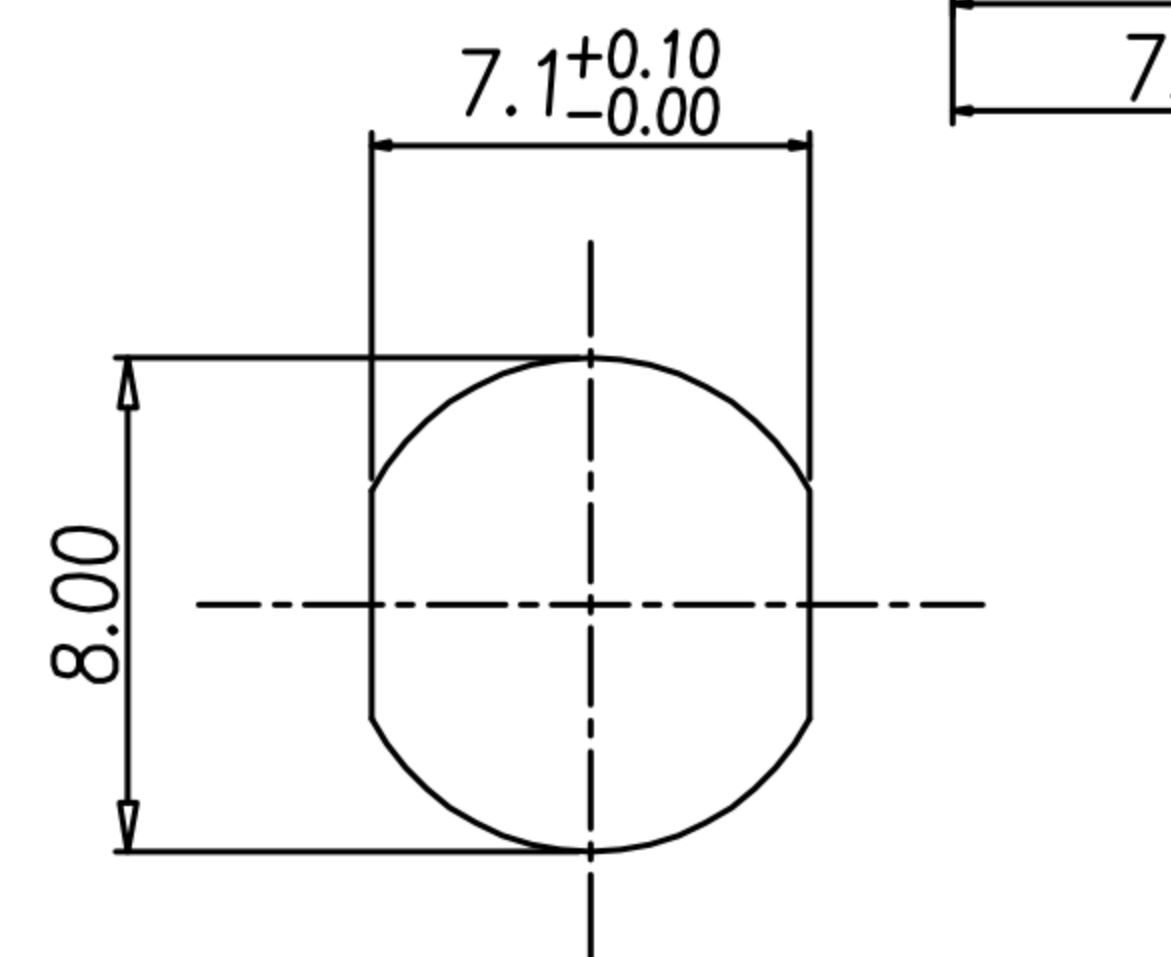
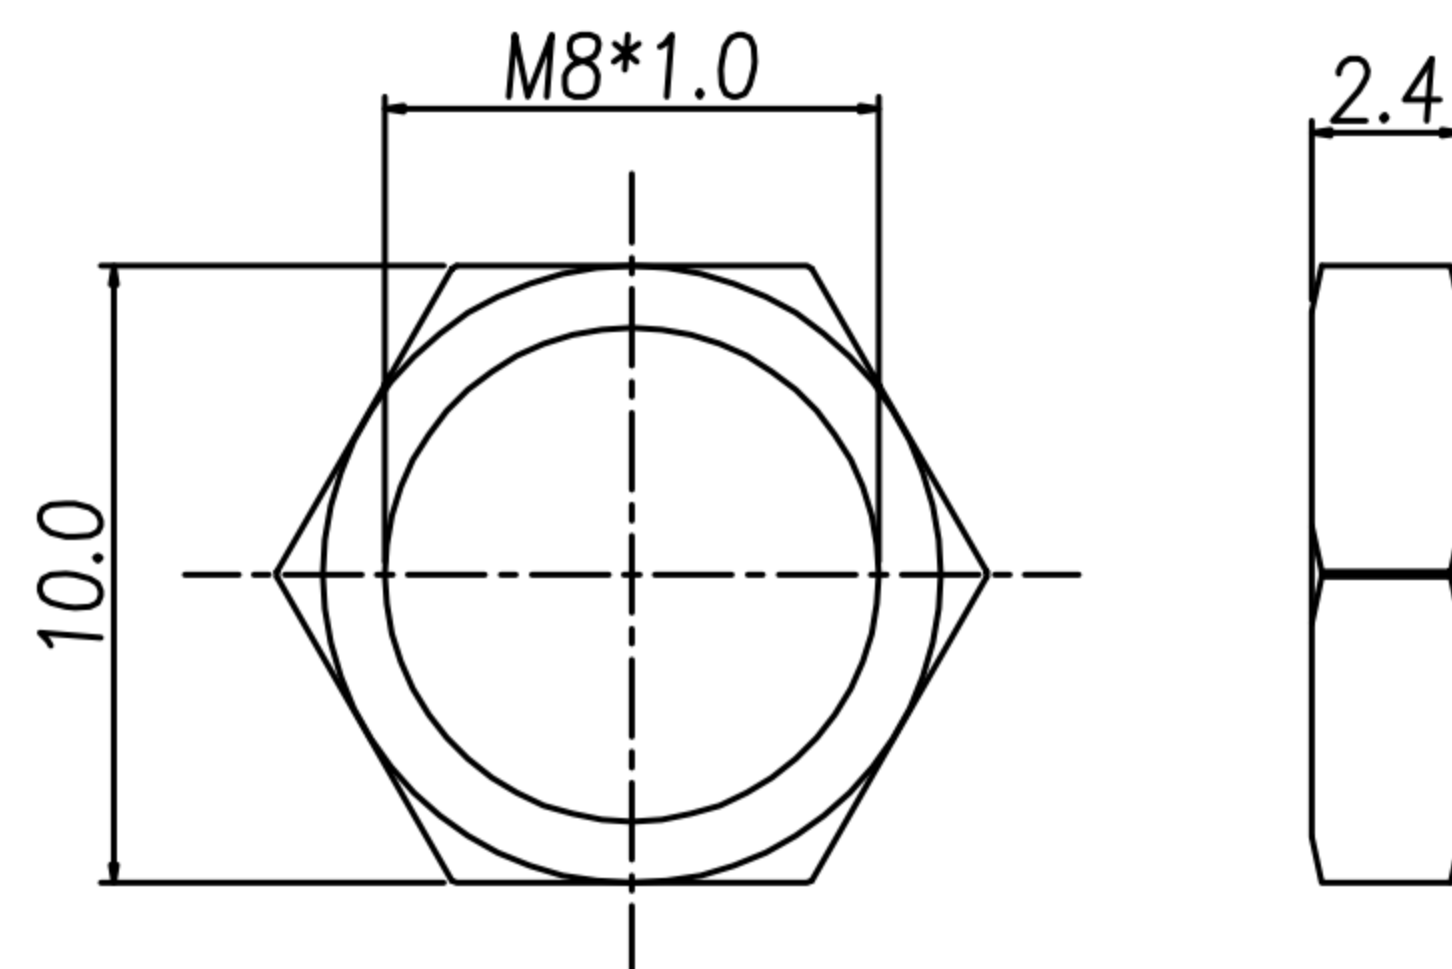
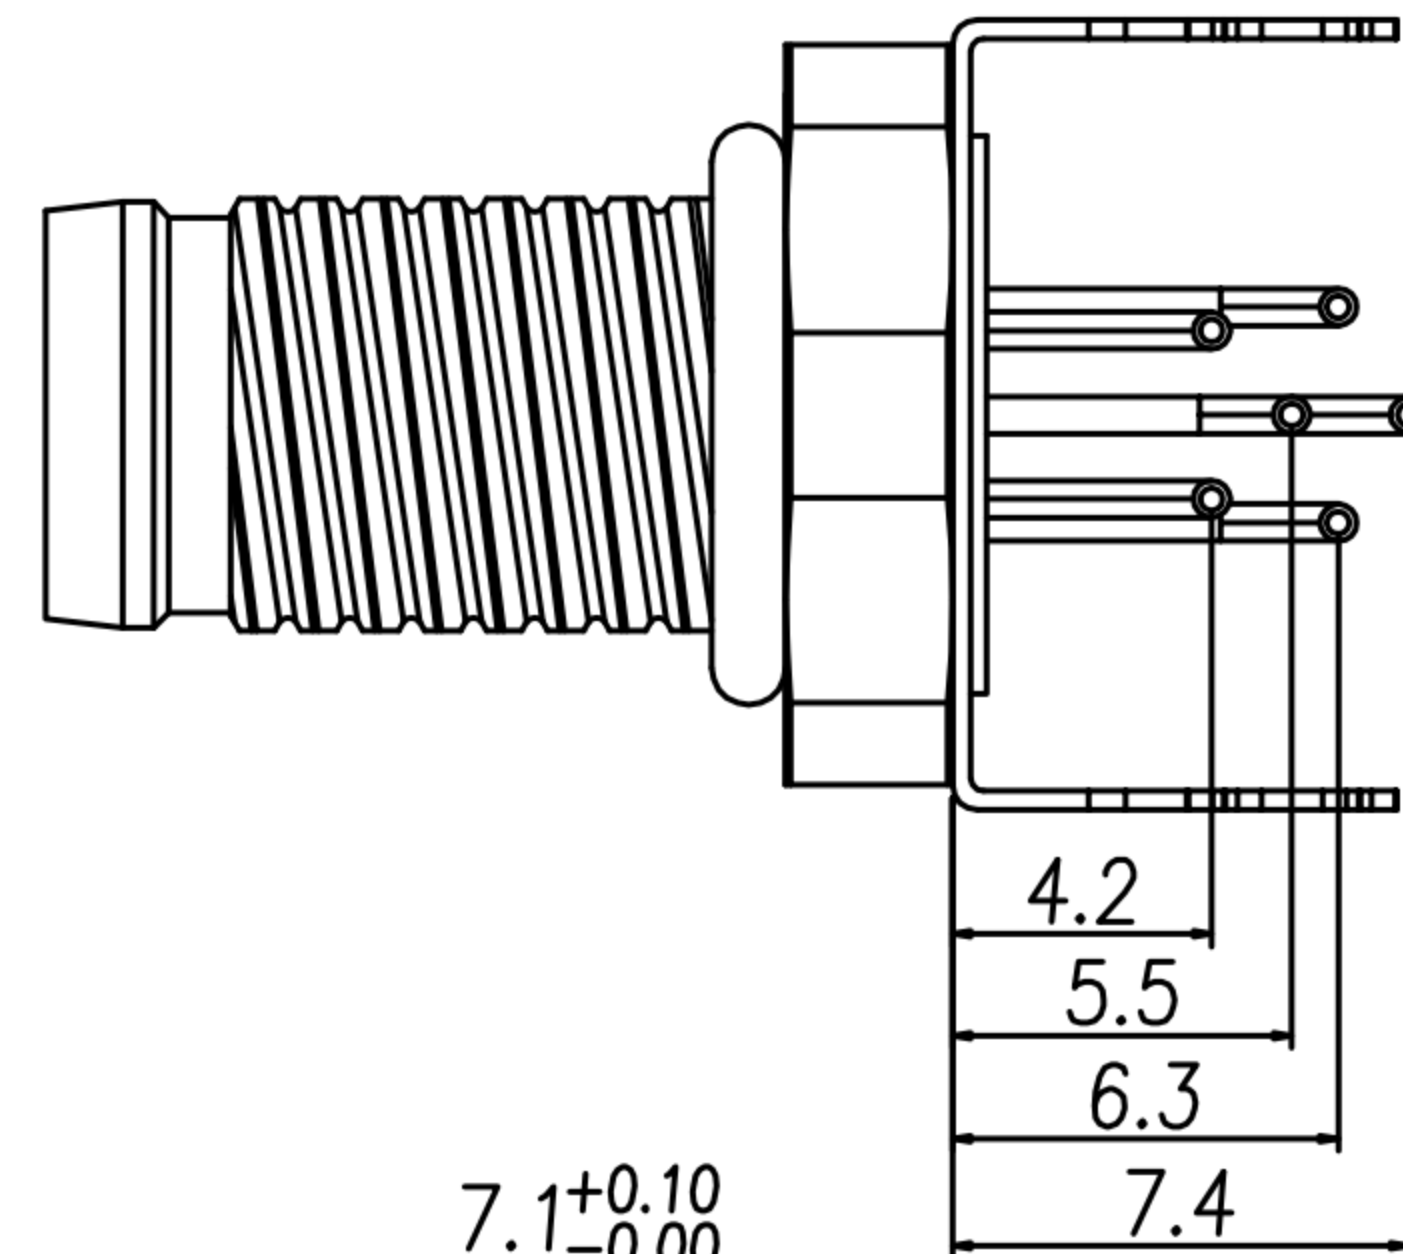


REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	YEH	2016/10/19	
B	新增料號	KU	2018/10/08	
C				
D				

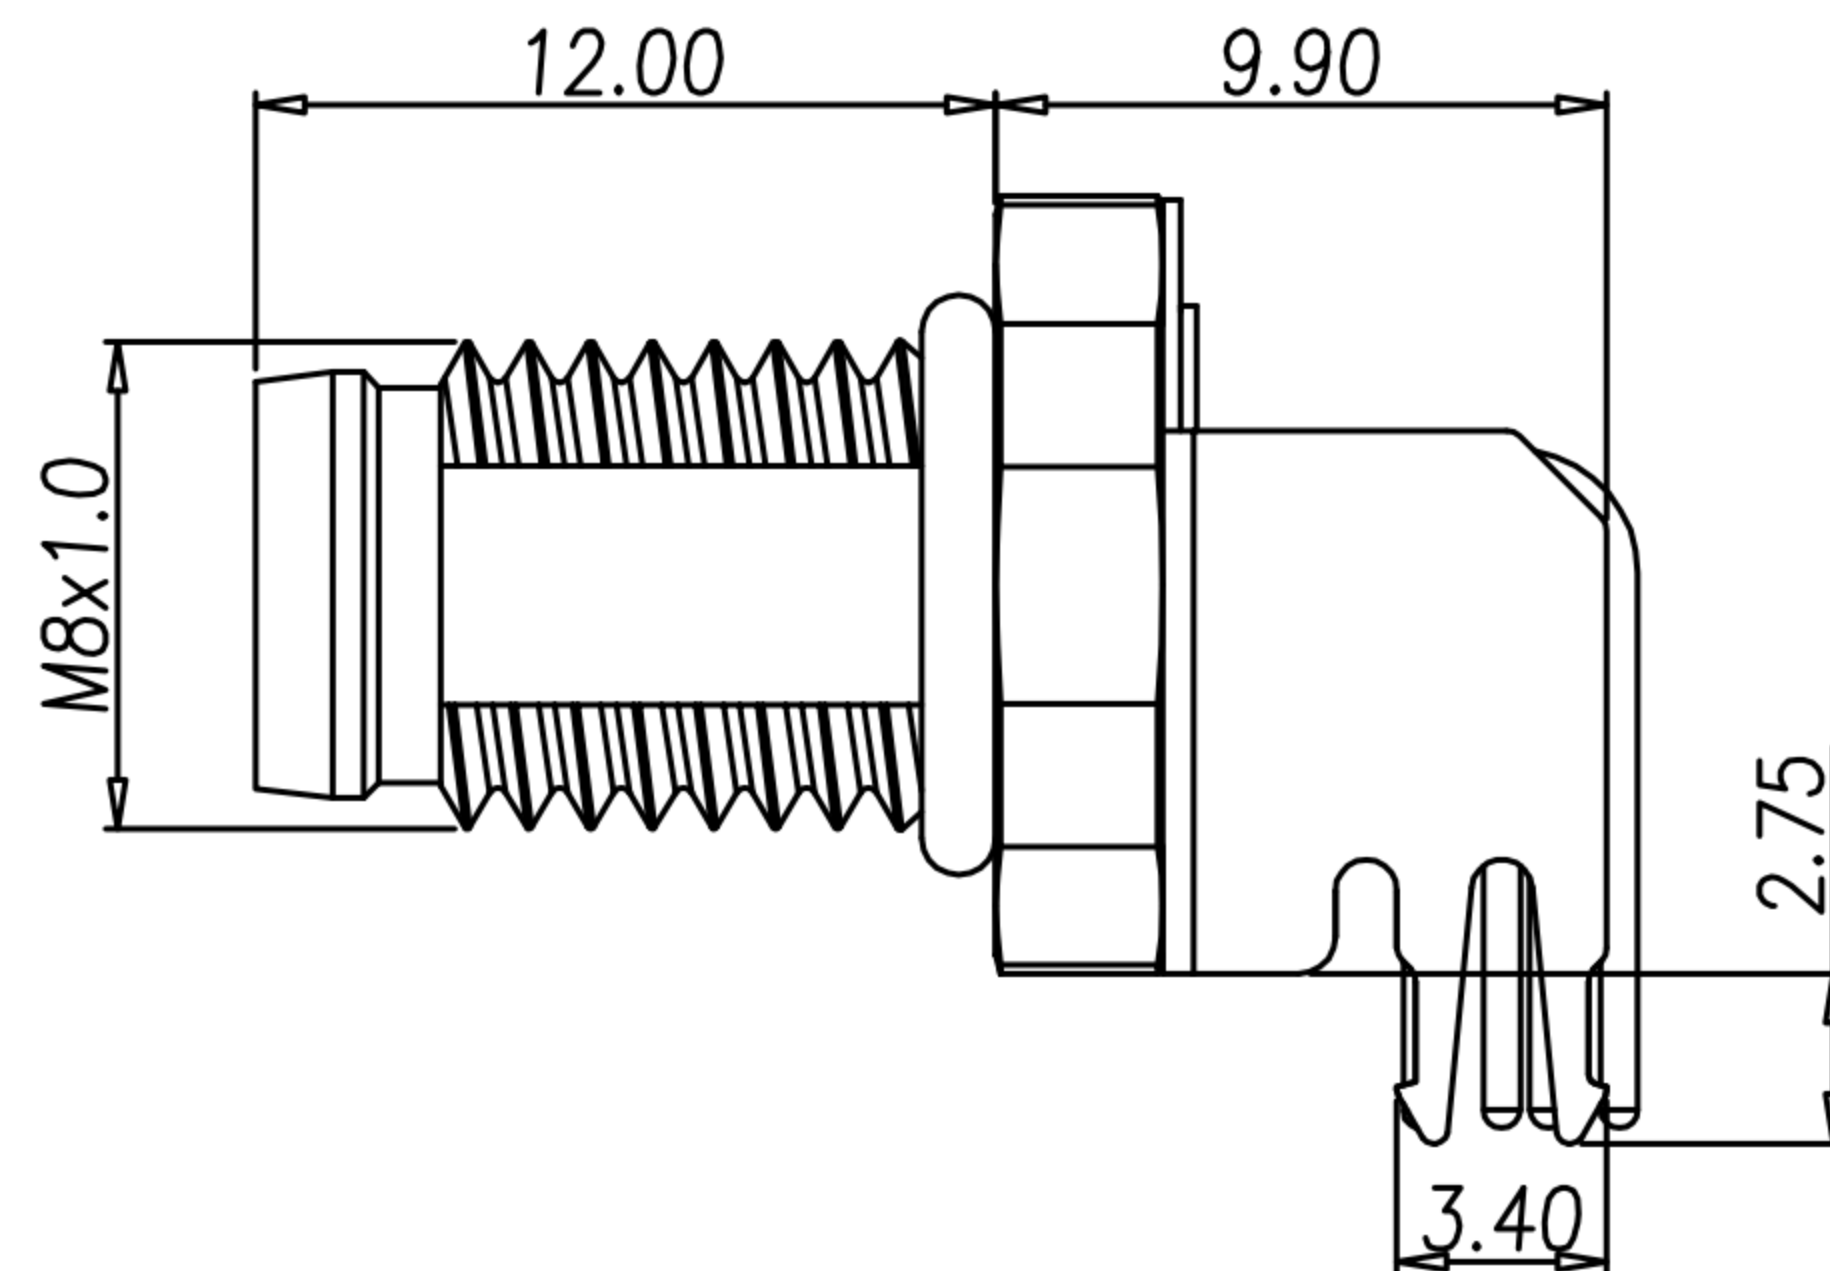

1. MATERIAL :
 - 1-1. HOUSING : PA UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : BRASS.
 - 1-3. NUT : BRASS.
 - 1-4. SHELL : BRASS.
 - 1-5. O-RING : NBR
 - 1-6. GROUND : PHOSPHOR BRONZE
2. FINISH :
 - 2-1. CONTACT : 10 MICRO INCHES MIN. GOLD PLATED
UNDER PLATE : NICKEL
 - 2-2. NUT : NICKEL PLATED
 - 2-3. SHELL : NICKEL PLATED
 - 2-4. GROUND : BIRGHT TIN PLATED
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 2A
 - 3-2. Rated Voltage : 30V
 - 3-3. Water proof: IP67
4. Environmental :
 - 4-1. Operation Temperature : -40℃~85℃

TABLE A 

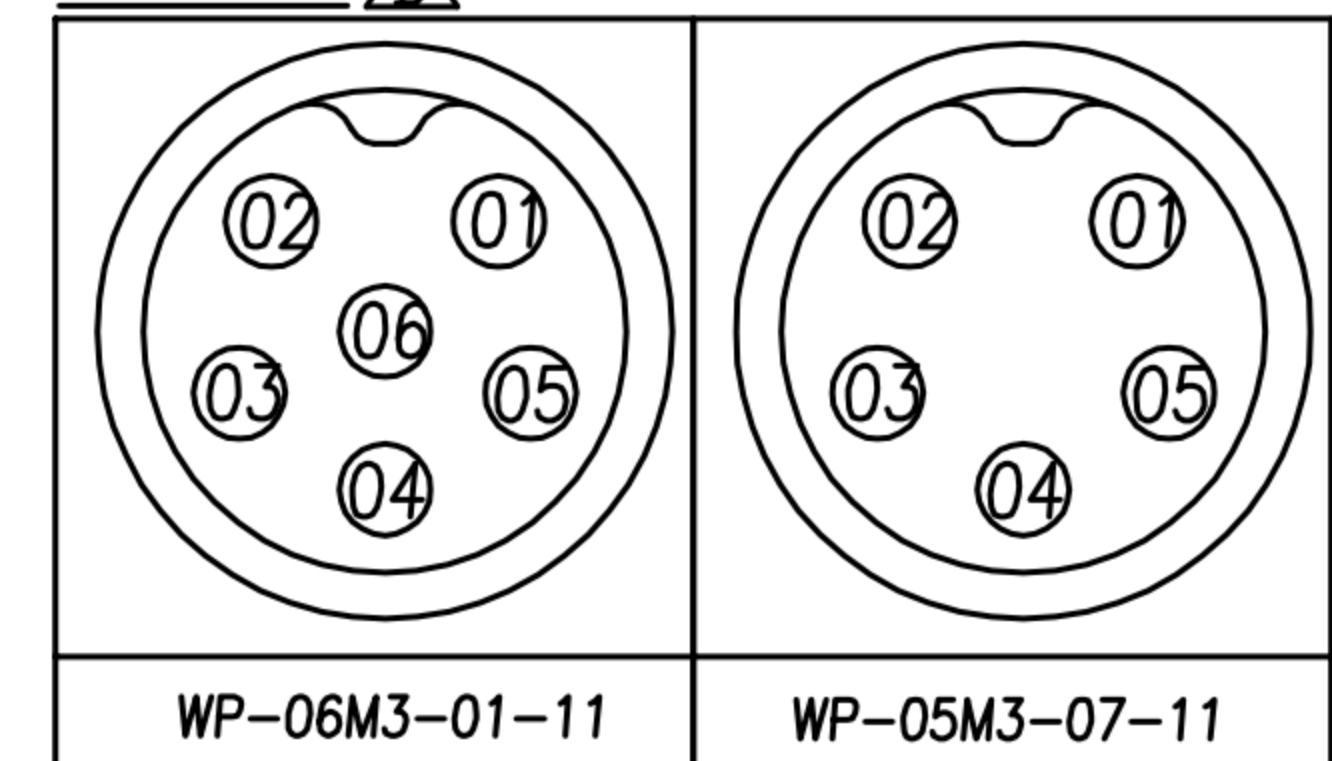

RECOMMENDPANEL CUT-OUT

P.C.B LAYOUT

DRAWN	Ku Chou	APPVL	Emily Suen	UNIT	mm	TOLERANCE . xx xxx xxxx ANGULA ±0.20 ±0.10 ±0.05 ±0.03 ±1°		广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	TITLE	Waterproof M8 (M) 前鎖 90° DIP+接地			SHEET 1 2
CHK'D	Emily Suen			SCALE	1:1				PART NO.	SEE TABLE A	DWG NO.	QC7658	VERSION B