


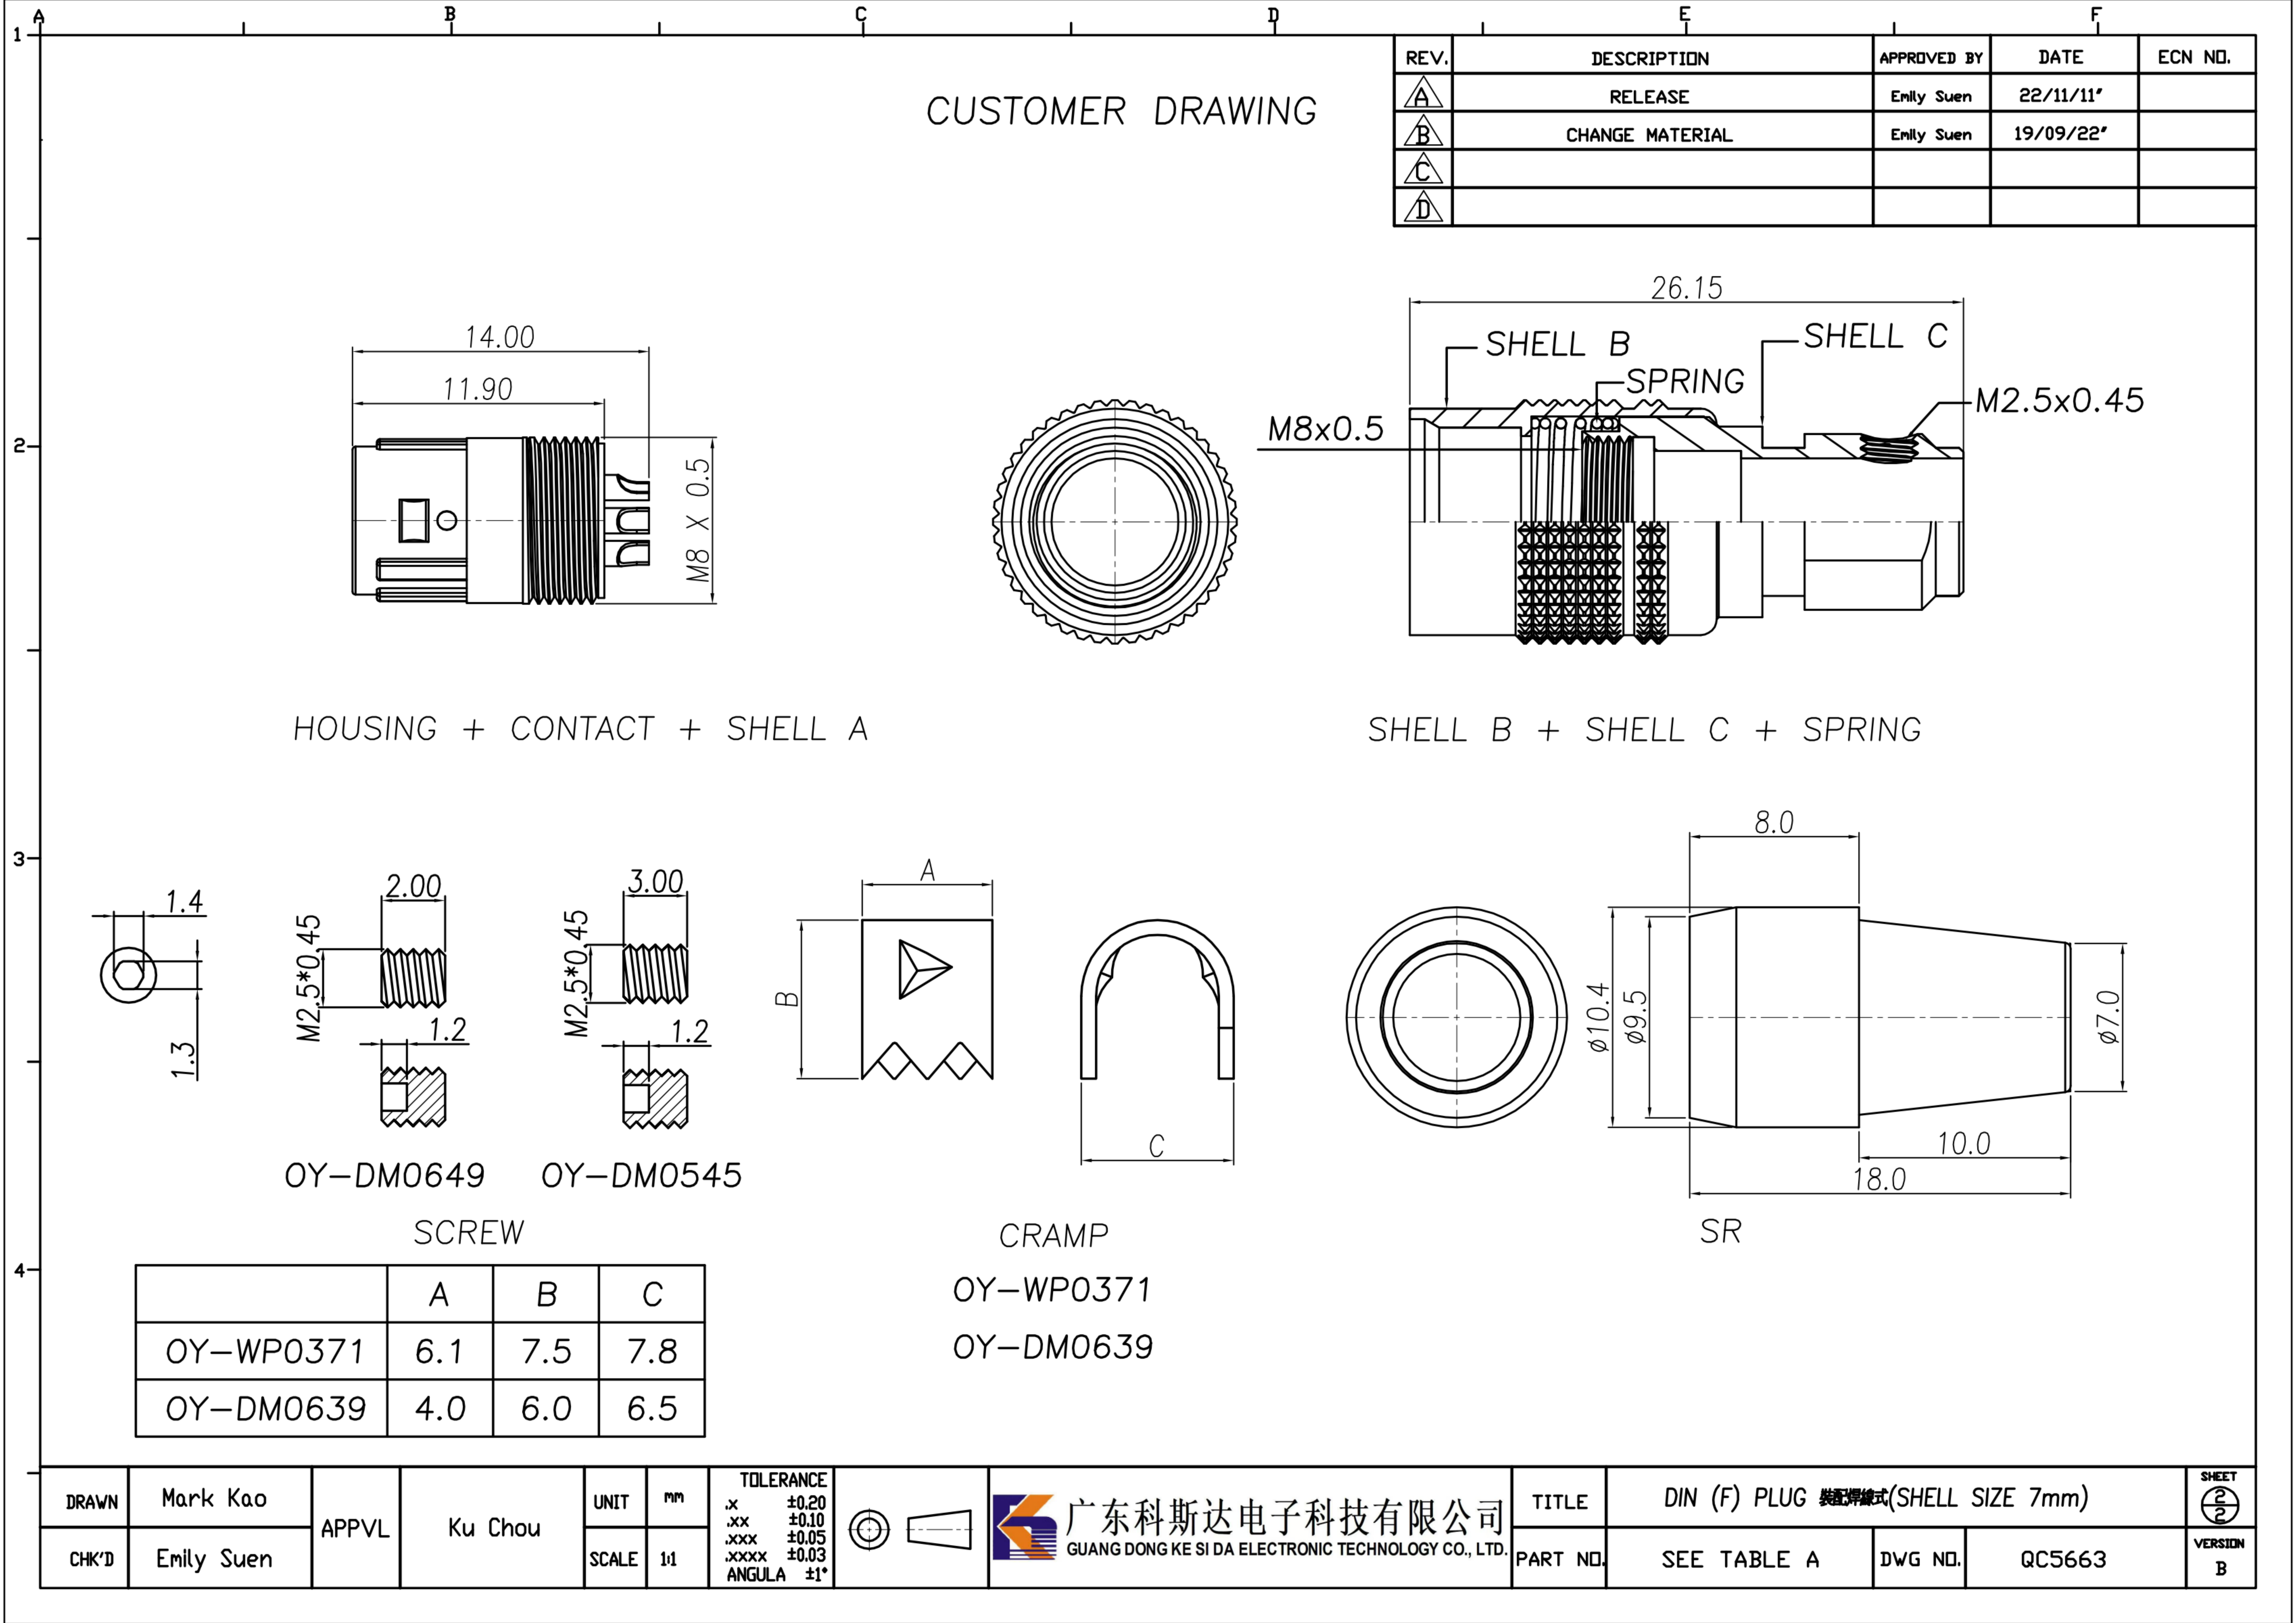


CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Emily Suen	22/11/11'	
B	CHANGE MATERIAL	Emily Suen	19/09/22'	
C				
D				

TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
			
DI-04F2-04	DI-05F2-01	DI-06F2-05	DI-07F2-01
CONTACT ARRANGEMENT(FRONT VIEW)			
			
DI-06F2-08 (小線夾)			

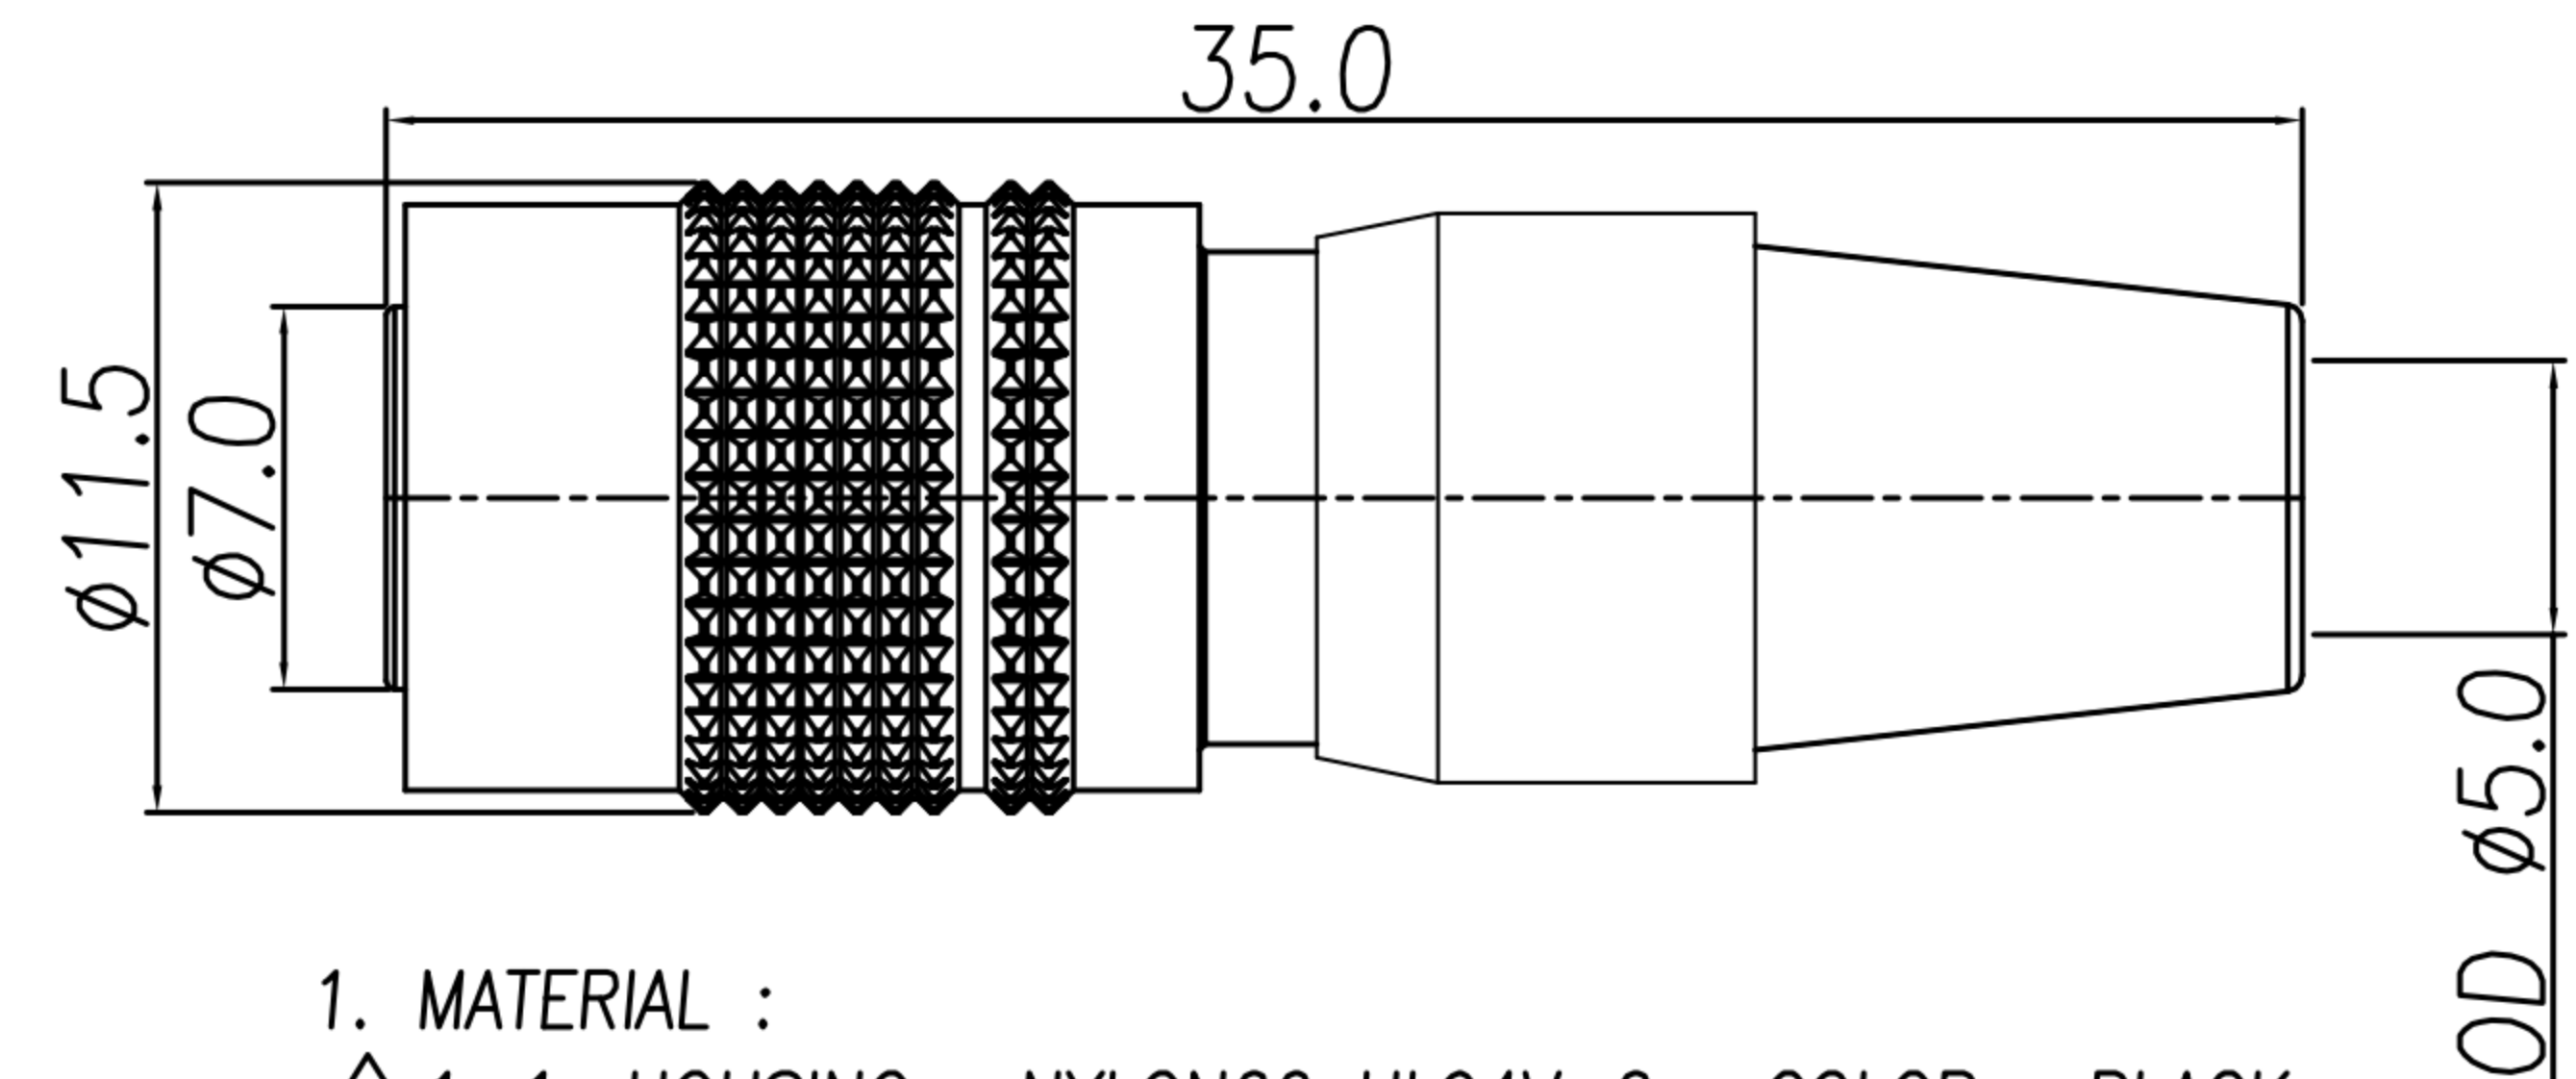

1. MATERIAL :

- 1-1. HOUSING : NYLON66 UL94V-0 ; COLOR : BLACK
1-2. CONTACT : PHOSPHOR BRONZE
1-3. SHELL A : ZINC ALLOY
1-4. SHELL B : BRASS
1-5. SHELL C : BRASS
1-6. SPRING : STAINLESS STEEL
1-7. SCREW : ALLOY STEEL
1-8. CRAMP : BRASS
1-9. SR : NBR ; COLOR : BLACK

2. FINISH :


- 2-1. CONTACT : GOLD FLASH
2-2. SHELL A : NICKEL
2-3. SHELL B : SATIN NICKEL
2-4. SHELL C : NICKEL
2-5. SPRING : NICKEL
2-6. SCREW : NICKEL

3. ELECTRICAL SPECIFICATION :

- 3-1. Rated current : 2A
3-2. Rated voltage : 4PIN 150V AC / 200V DC ;
5~7PIN 100V AC / 140V DC


4. Environmental :

- 4-1. Operation Temperature : -25℃~85℃

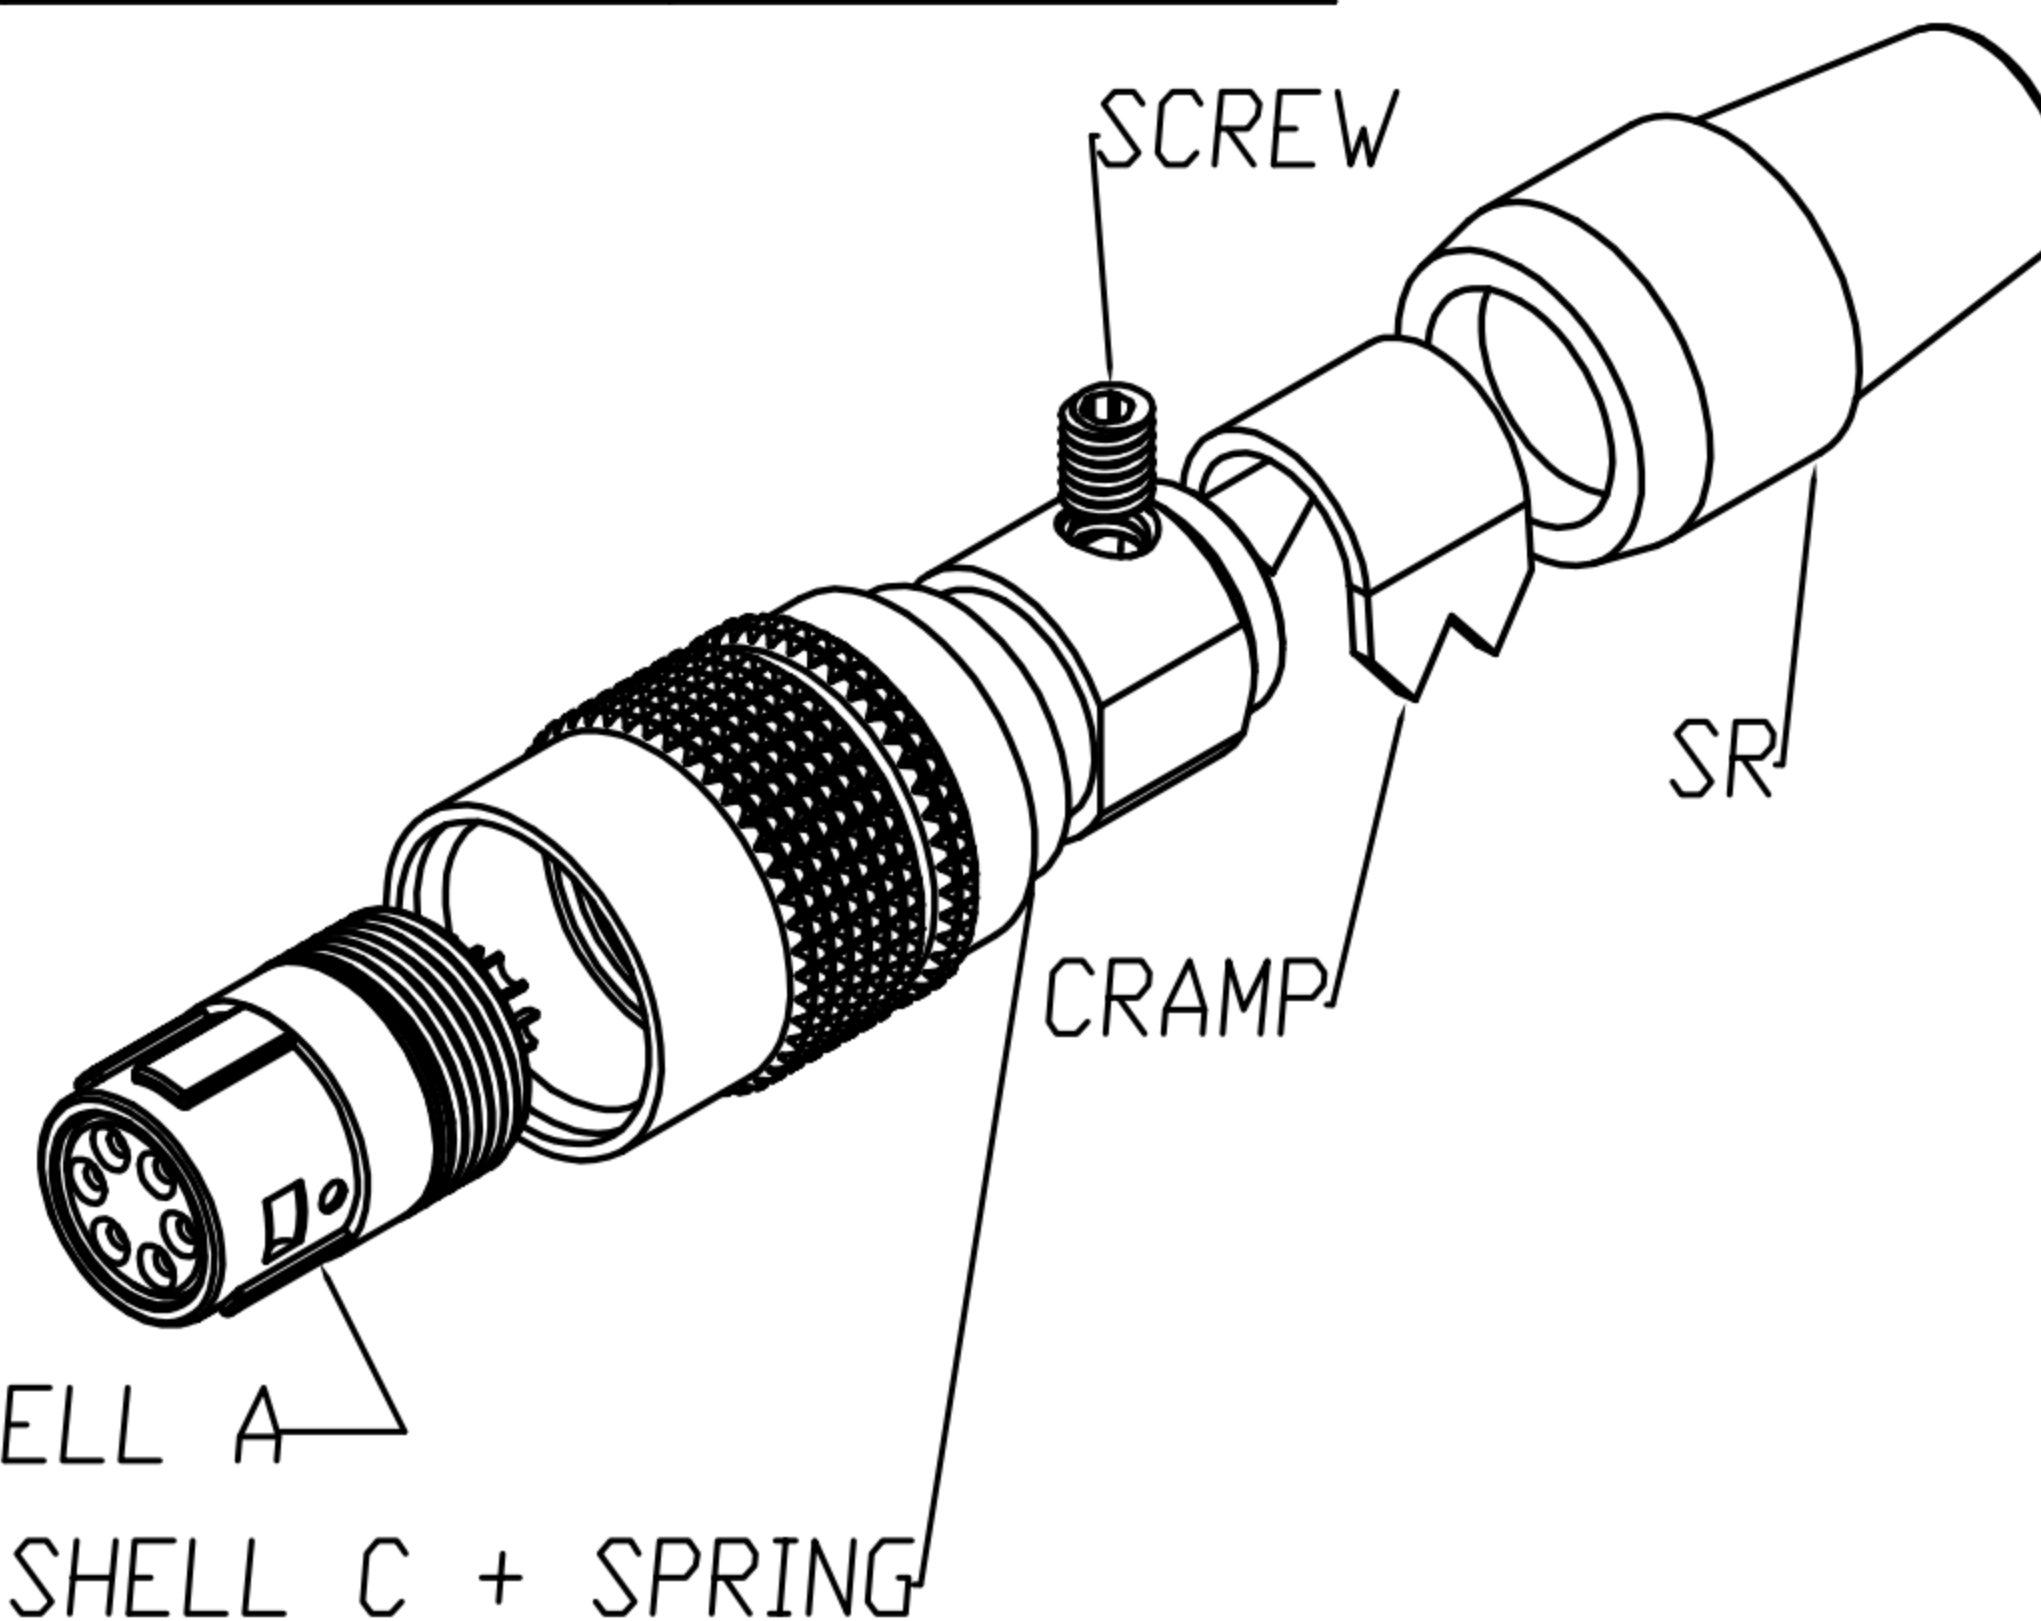

HOUSING + CONTACT + SHELL A

SHELL B + SHELL C + SPRING

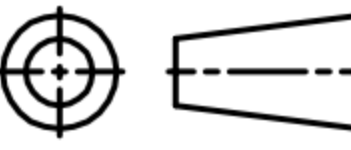DRAWN	Mark Kao	APPVL	Ku Chou	UNIT	mm	TOLERANCE .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°		 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	TITLE	DIN (F) PLUG 插孔式 (SHELL SIZE 7mm)				SHEET 12
CHK'D	Emily Suen			SCALE	1:1	PART NO.			SEE TABLE A	DWG NO.	QC5663	VERSION B		