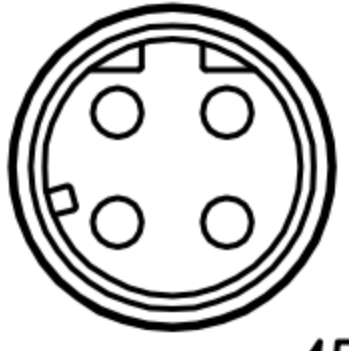





CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Fido Weng	04/03/10	
B				
C				


TABLE A

	
4PIN	5PIN
WP-04M2-133-11 WP-04M2-132-11 WP-04M3-15-11	WP-05M2-117-11

WP-04M3-15-11	STAINLESS STEEL 316	-	GOLD 10u"
WP-04M2-132-11	BRASS	NICKEL PLATED	GOLD FLASH
WP-04M2-133-11	BRASS	NICKEL PLATED	GOLD 10u"
WP-05M2-117-11	BRASS	NICKEL PLATED	GOLD 10u"
PART NO	MATERIAL(SHELL&NUT)	FINISH(SHELL&NUT)	FINISH(CONTACT)

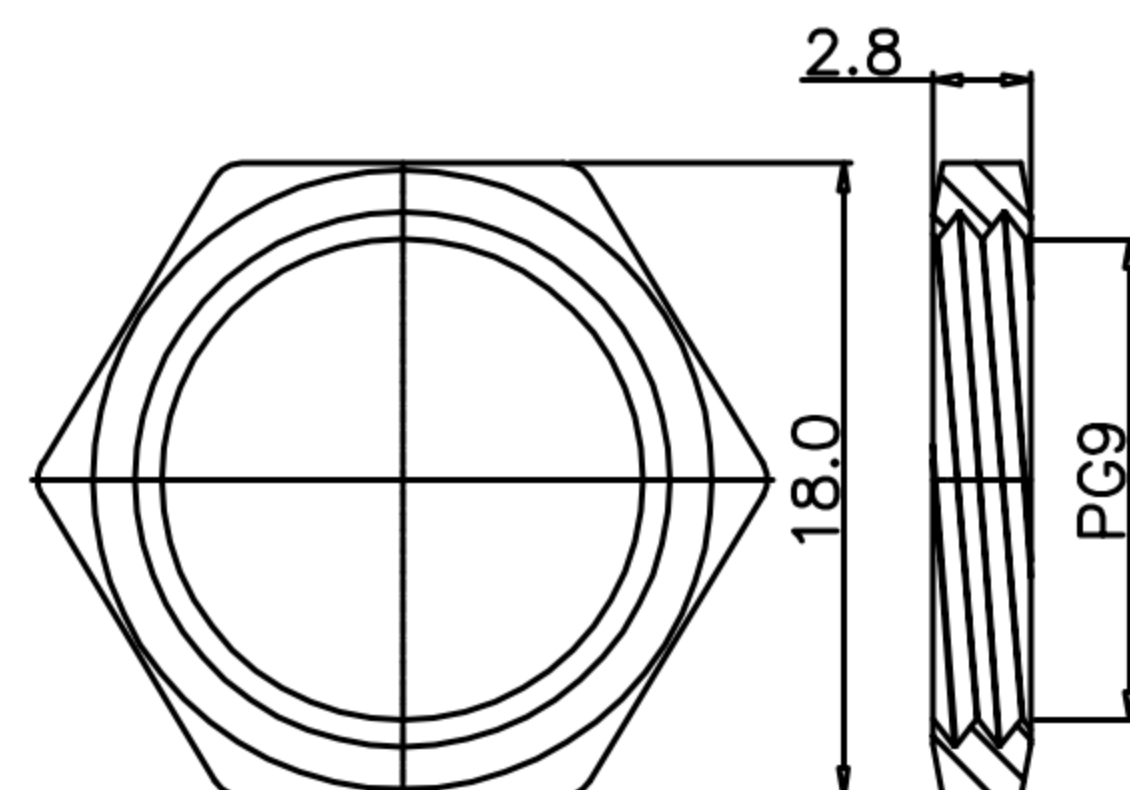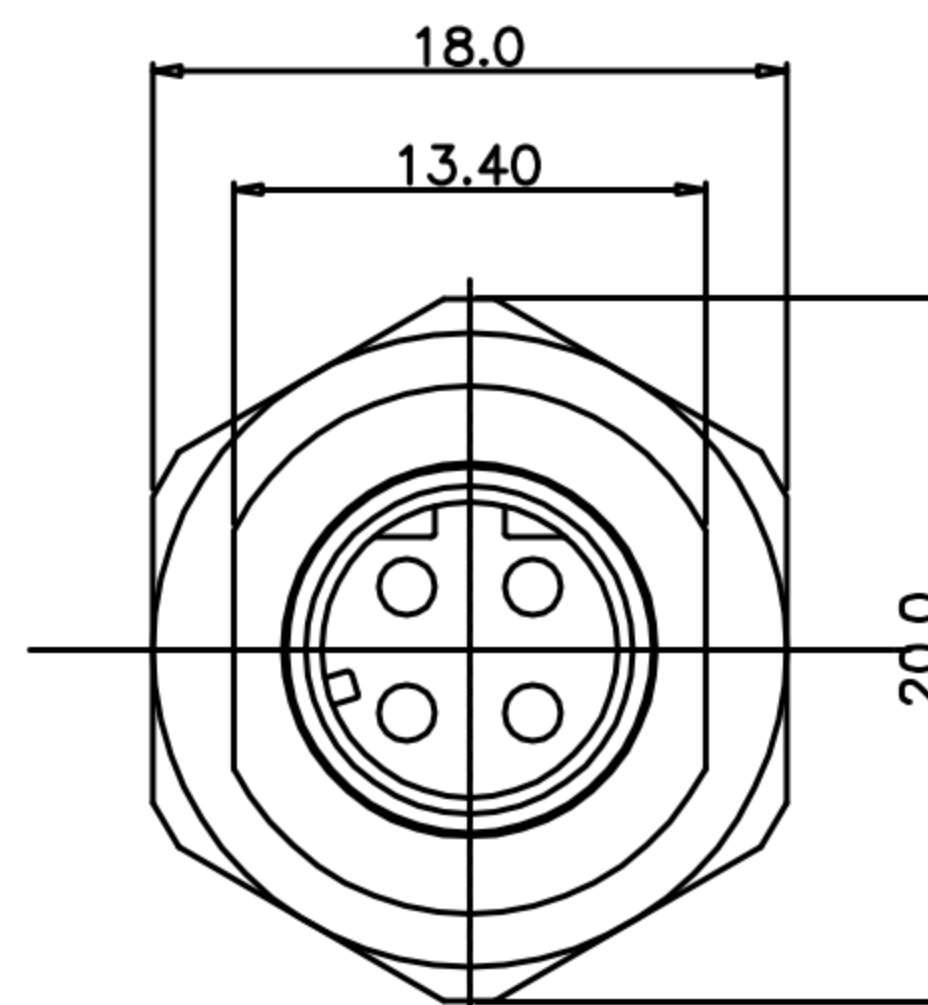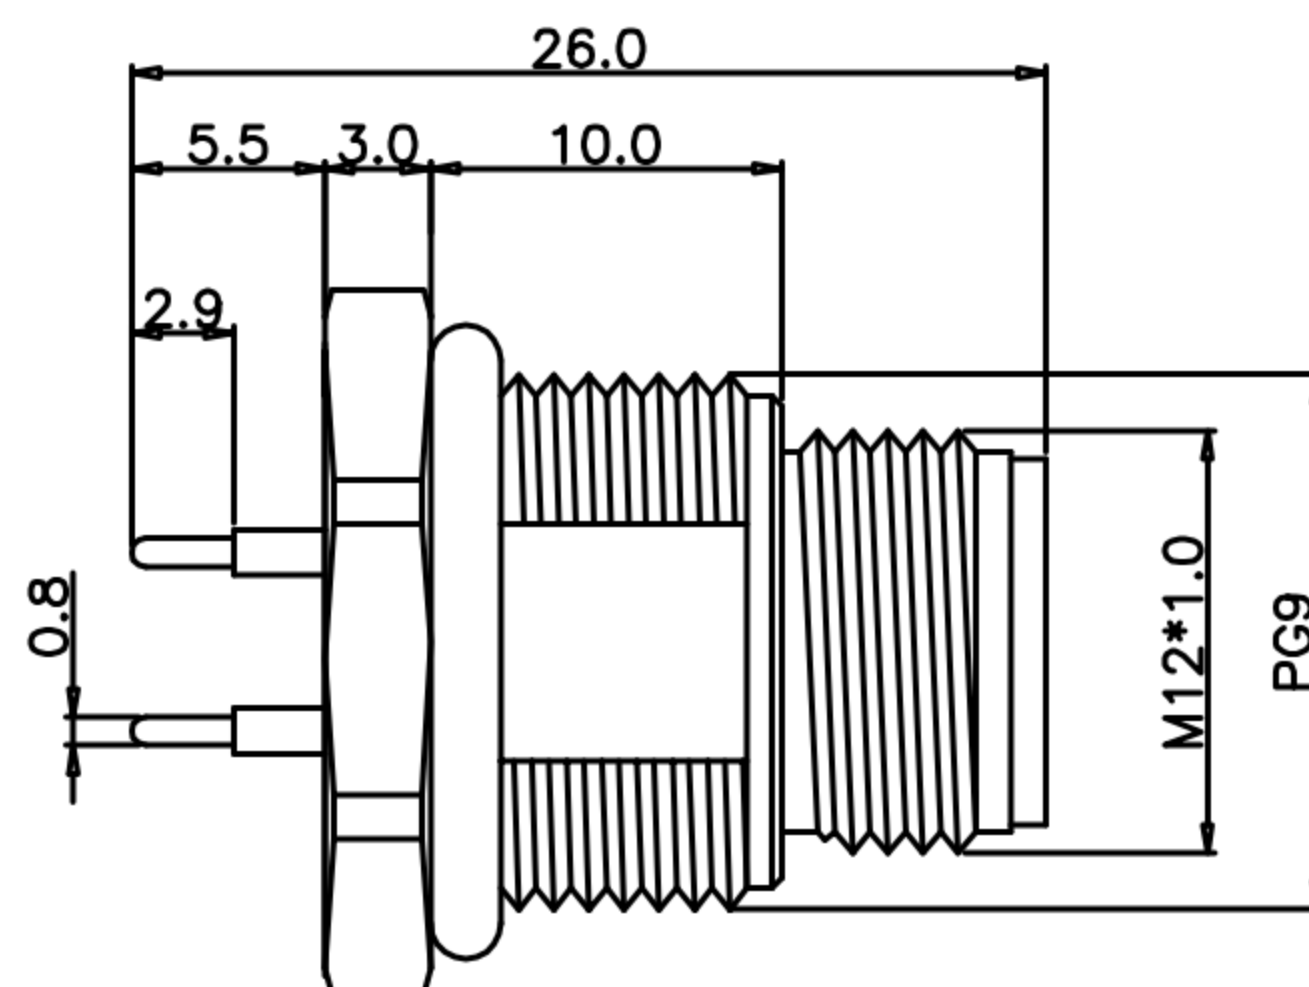

NUT

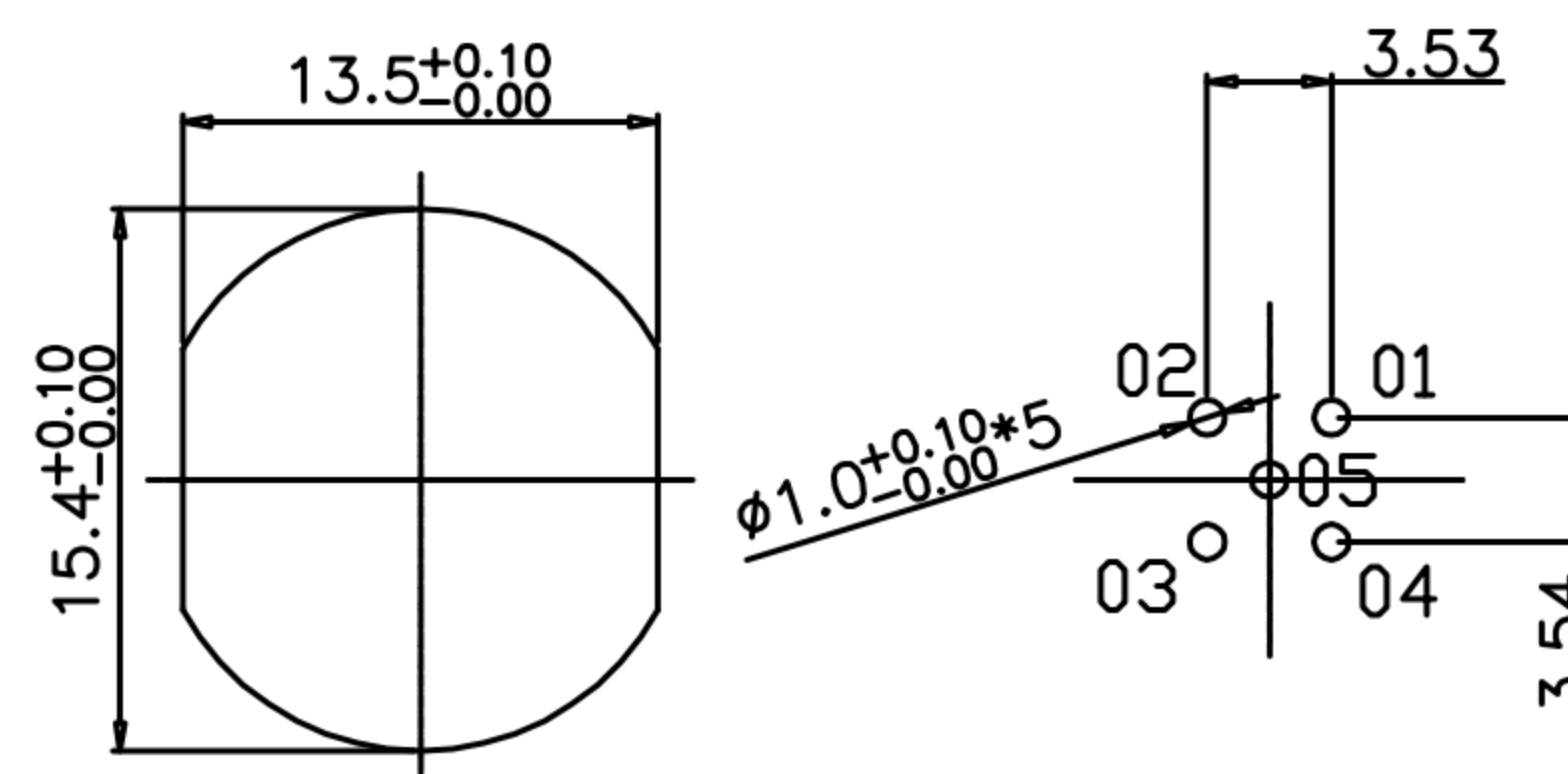

RECOMMEND PANEL CUT-OUT RECOMMEND P.C.B LAYOUT

- MATERIAL :
 - HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - CONTACT : BRASS
 - NUT : SEE TABLE A
 - SHELL : SEE TABLE A
 - O-RING : EPDM ; COLOR : BLACK
- FINISH :
 - CONTACT : SEE TABLE A.
UNDER PLATE : NICKEL
 - NUT : SEE TABLE A
 - SHELL : SEE TABLE A
- ELECTRICAL SPECIFICATION :
 - Rated current : 4A
 - Rated Voltage : 4PIN 250V ; 5PIN 60V
 - Water proof: IPX7
- Environmental :
 - Operation Temperature : -40℃~85℃

DRAWN	Ku Chou	APPEND	Fido Weng	UNIT	MM	TOLERANCE			广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	TITLE	防水 M12 D-Code (M) 插针 Pg9 插针式			SHEET
CHECKED	Emily Suen	SCALE	1:1	ANGULAR	±1°	PART NO.				SEE TABLE A	DWG NO.	QC7519	VERSION	A