CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Fido Weng	24/06/21"	
B	更改顏色	KU	15/11/18"	
C	ADD PART NO	KU	16/05/19"	

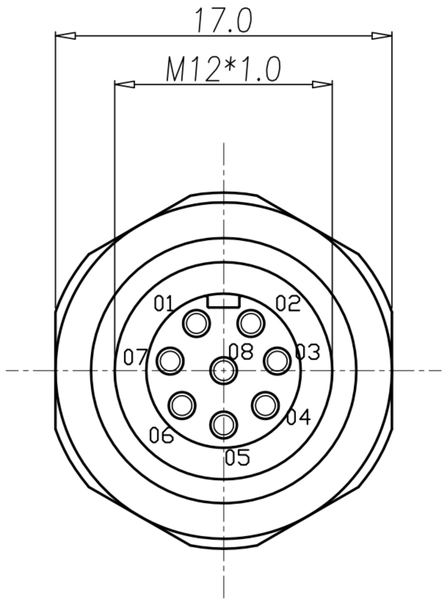

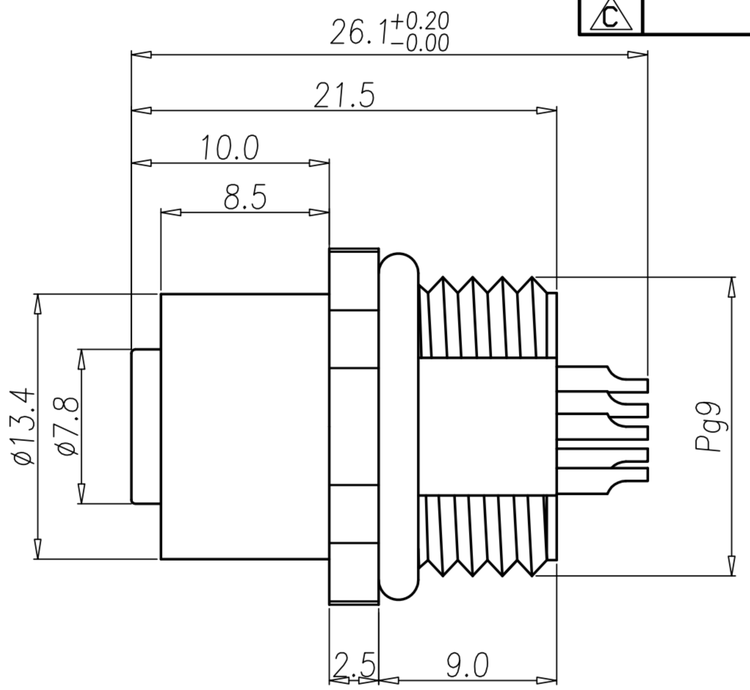

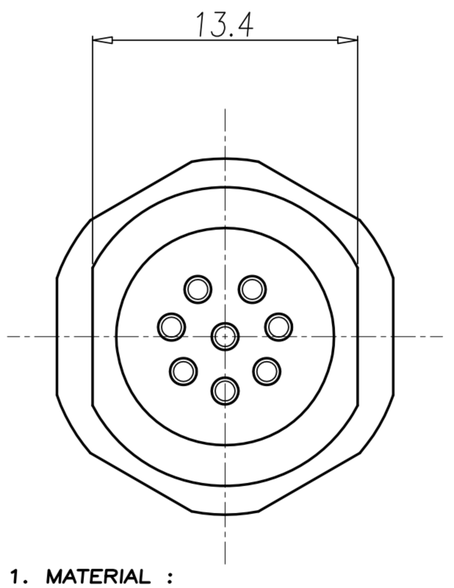

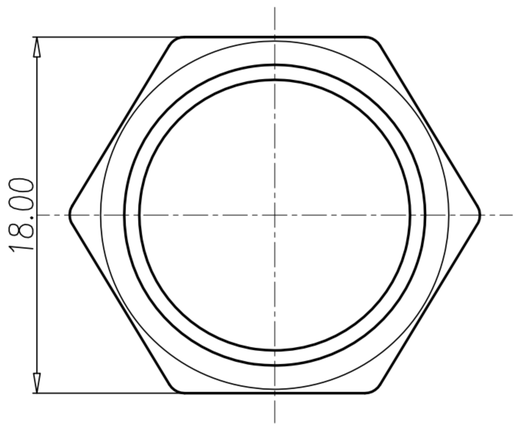

NUT

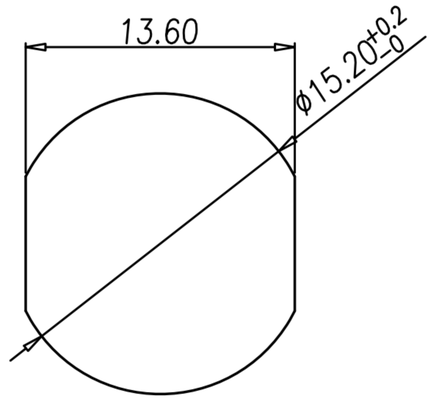

RECOMMENDPANEL CUT-OUT

1. MATERIAL :
   1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
   1-2. CONTACT : BRASS
   1-3. SHELL : BRASS
   1-4. NUT : BRASS
   1-5. O-RING : EPDM ; COLOR : BLACK.
2. FINISH :
   2-1. CONTACT : SEE TABLE A
   2-2. SHELL : NICKEL PLATED.
   2-2. NUT : NICKEL PLATED.
3. ELECTRICAL SPECIFICATION :
   3-1. Rated current : 2A
   3-2. Rated Voltage : 30V
   3-3. Water proof : IP67
4. Environmental :
   4-1. Operation Temperature : -40℃~85℃

TABLE A C

WP-08F2-35	GOLD FLASH
WP-08F2-109-11	GOLD 10u"
WP-07F2-23-11	GOLD FLASH
WP-06F2-86-11	GOLD FLASH
PART NO	FINISH

DRAWN	Ku Chou	APP'D	Fido Weng	UNIT	mm	TOLERANCE .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°	广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	TITLE	WP M12 (F) 板端後鎖PG9洗變邊焊線式	SHEET 1/1
CHK'D	Emily Suen			SCALE	1:1			PART NO.	SEE TABLE A	DWG NO. QC5956	VERSION C