
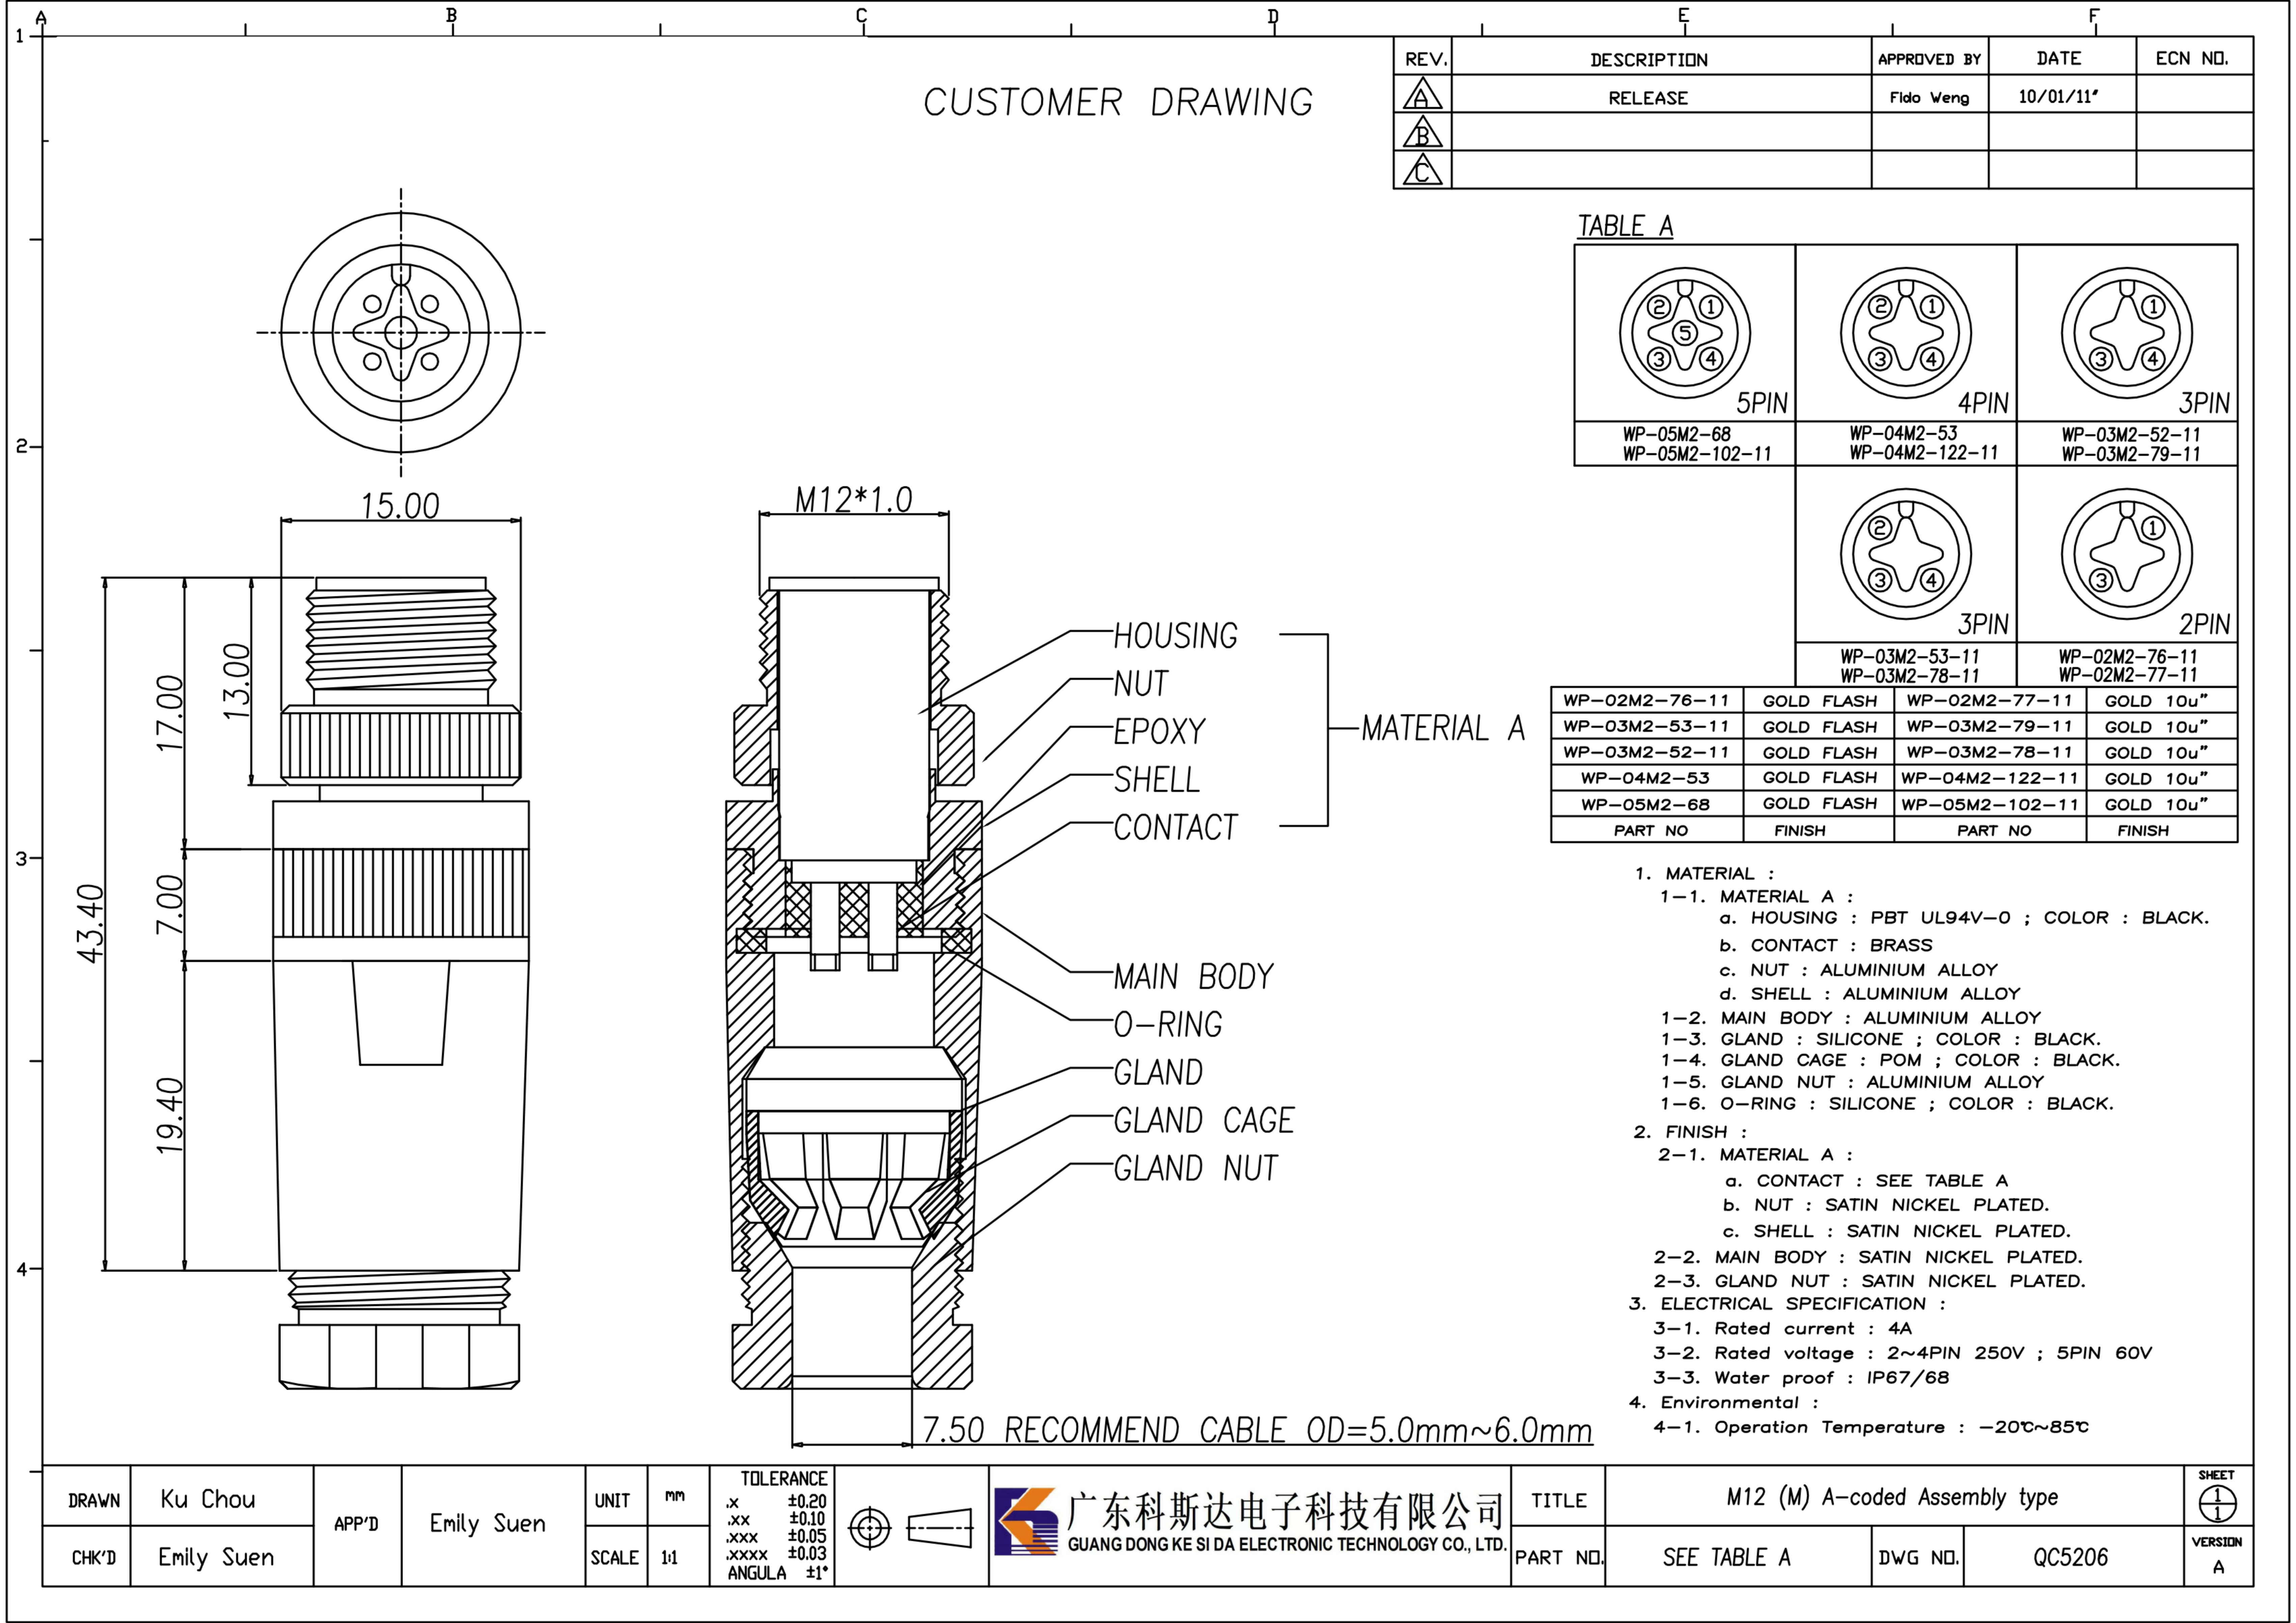


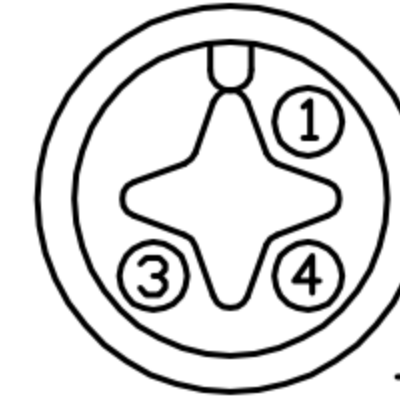


CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Fido Weng	10/01/11	
B				
C				

TABLE A

 5PIN	 4PIN	 3PIN	
WP-05M2-68 WP-05M2-102-11	WP-04M2-53 WP-04M2-122-11	WP-03M2-52-11 WP-03M2-79-11	
	 3PIN	 2PIN	
	WP-03M2-53-11 WP-03M2-78-11	WP-02M2-76-11 WP-02M2-77-11	
	WP-02M2-76-11	GOLD FLASH	WP-02M2-77-11
WP-03M2-53-11	GOLD FLASH	WP-03M2-79-11	GOLD 10u"
WP-03M2-52-11	GOLD FLASH	WP-03M2-78-11	GOLD 10u"
WP-04M2-53	GOLD FLASH	WP-04M2-122-11	GOLD 10u"
WP-05M2-68	GOLD FLASH	WP-05M2-102-11	GOLD 10u"
PART NO	FINISH	PART NO	FINISH

1. MATERIAL :
- 1-1. MATERIAL A :
- a. HOUSING : PBT UL94V-0 ; COLOR : BLACK.
 - b. CONTACT : BRASS
 - c. NUT : ALUMINIUM ALLOY
 - d. SHELL : ALUMINIUM ALLOY
- 1-2. MAIN BODY : ALUMINIUM ALLOY
- 1-3. GLAND : SILICONE ; COLOR : BLACK.
- 1-4. GLAND CAGE : POM ; COLOR : BLACK.
- 1-5. GLAND NUT : ALUMINIUM ALLOY
- 1-6. O-RING : SILICONE ; COLOR : BLACK.
2. FINISH :
- 2-1. MATERIAL A :
- a. CONTACT : SEE TABLE A
 - b. NUT : SATIN NICKEL PLATED.
 - c. SHELL : SATIN NICKEL PLATED.
- 2-2. MAIN BODY : SATIN NICKEL PLATED.
- 2-3. GLAND NUT : SATIN NICKEL PLATED.
3. ELECTRICAL SPECIFICATION :
- 3-1. Rated current : 4A
- 3-2. Rated voltage : 2~4PIN 250V ; 5PIN 60V
- 3-3. Water proof : IP67/68
4. Environmental :
- 4-1. Operation Temperature : -20℃~85℃

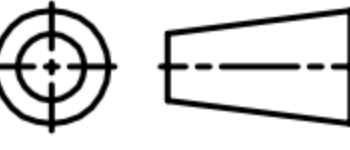DRAWN	Ku Chou	APP'D	Emily Suen	UNIT	mm	TOLERANCE			广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	TITLE	M12 (M) A-coded Assembly type			SHEET
CHK'D	Emily Suen			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°				PART NO.	SEE TABLE A	DWG NO.	QC5206	VERSION A