




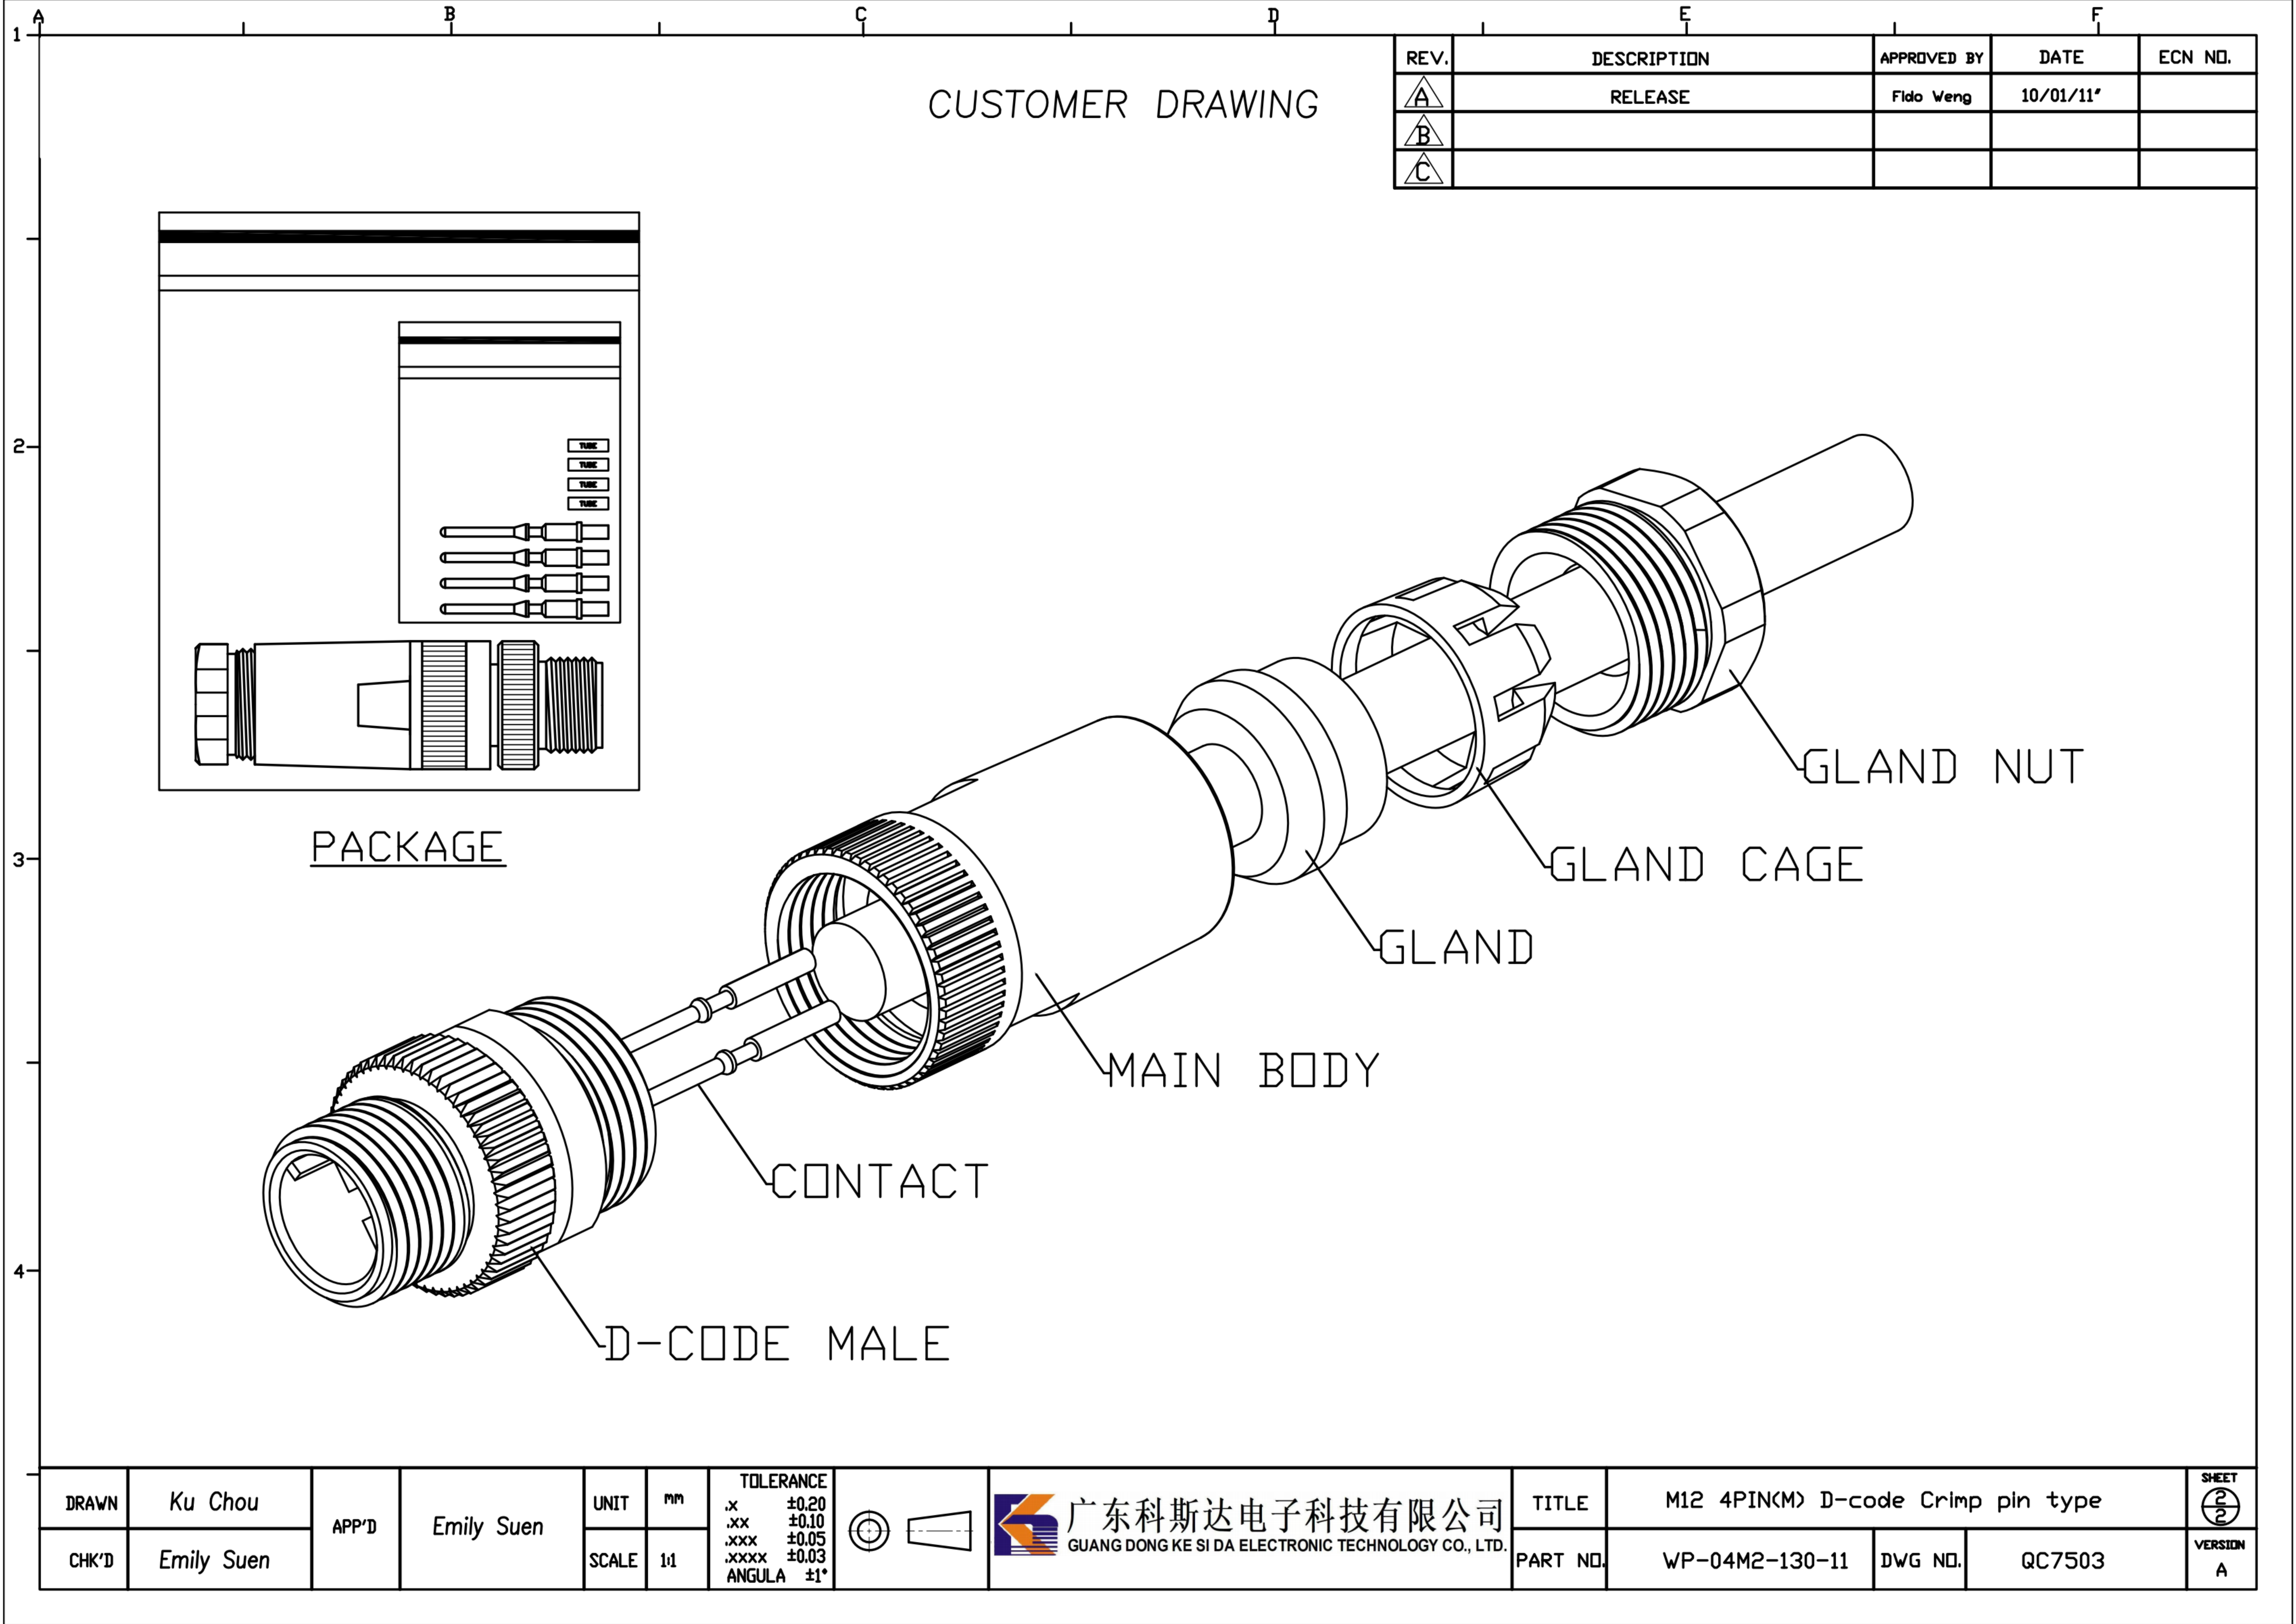

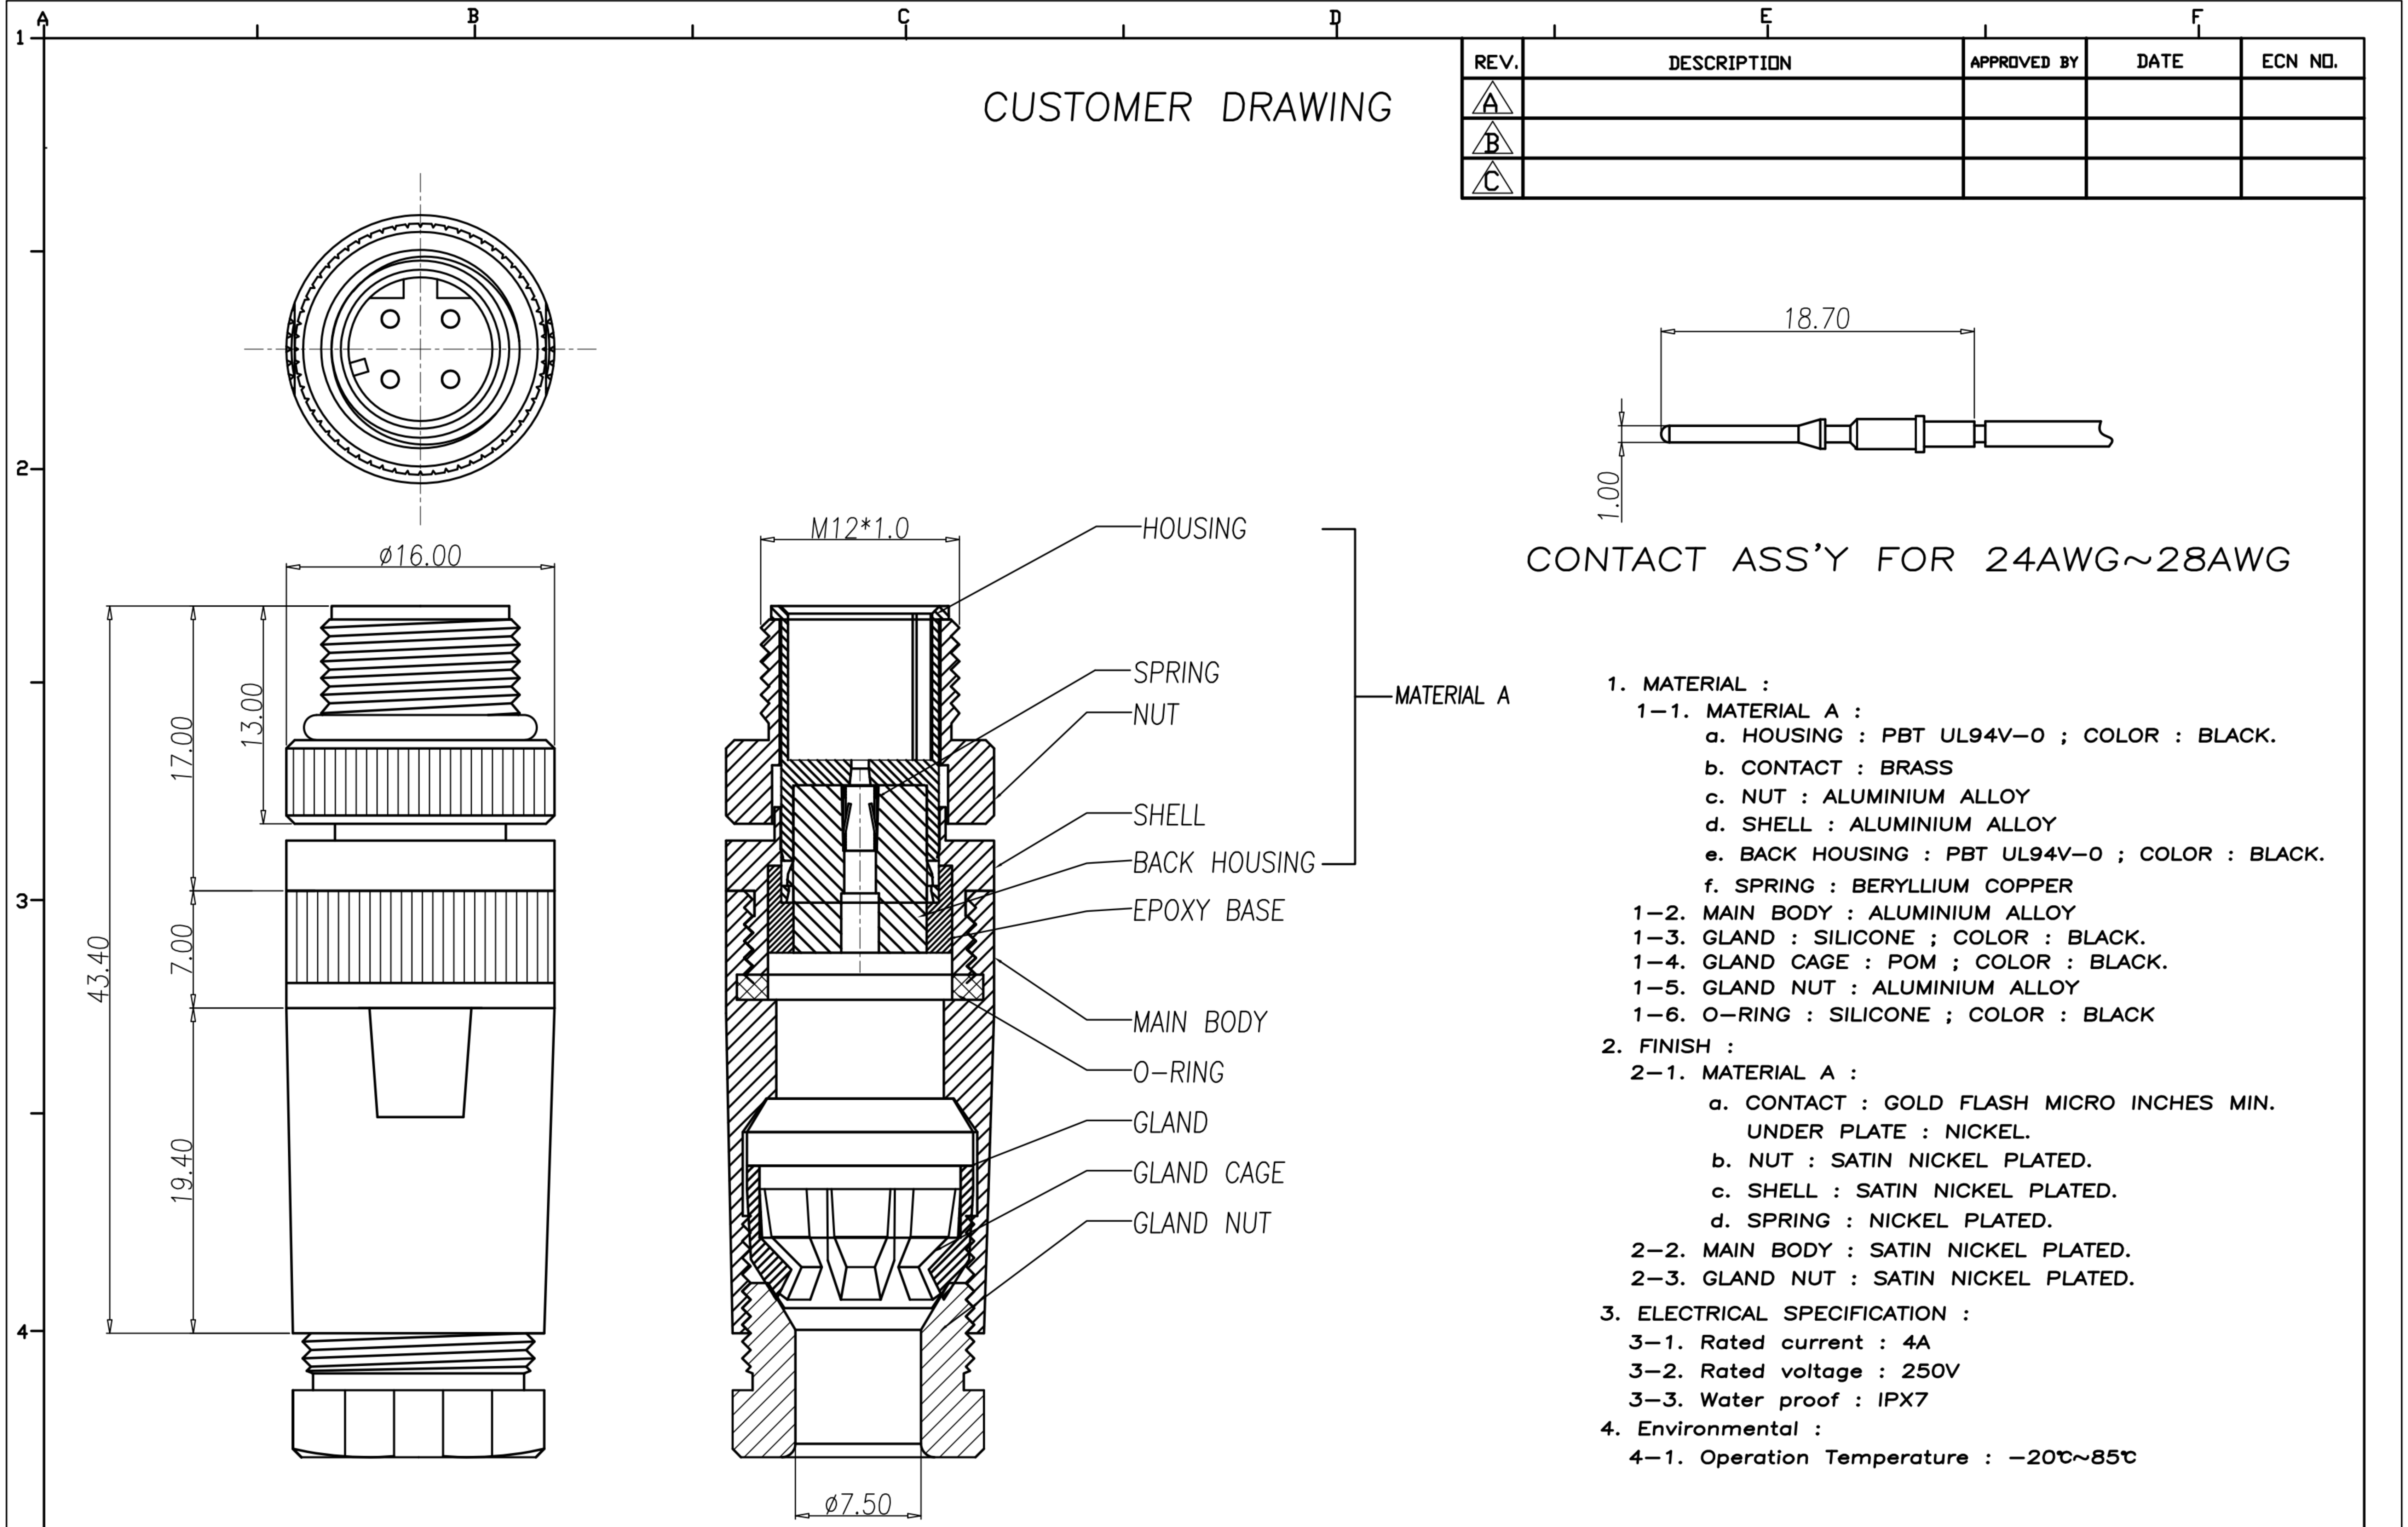

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A				
B				
C				

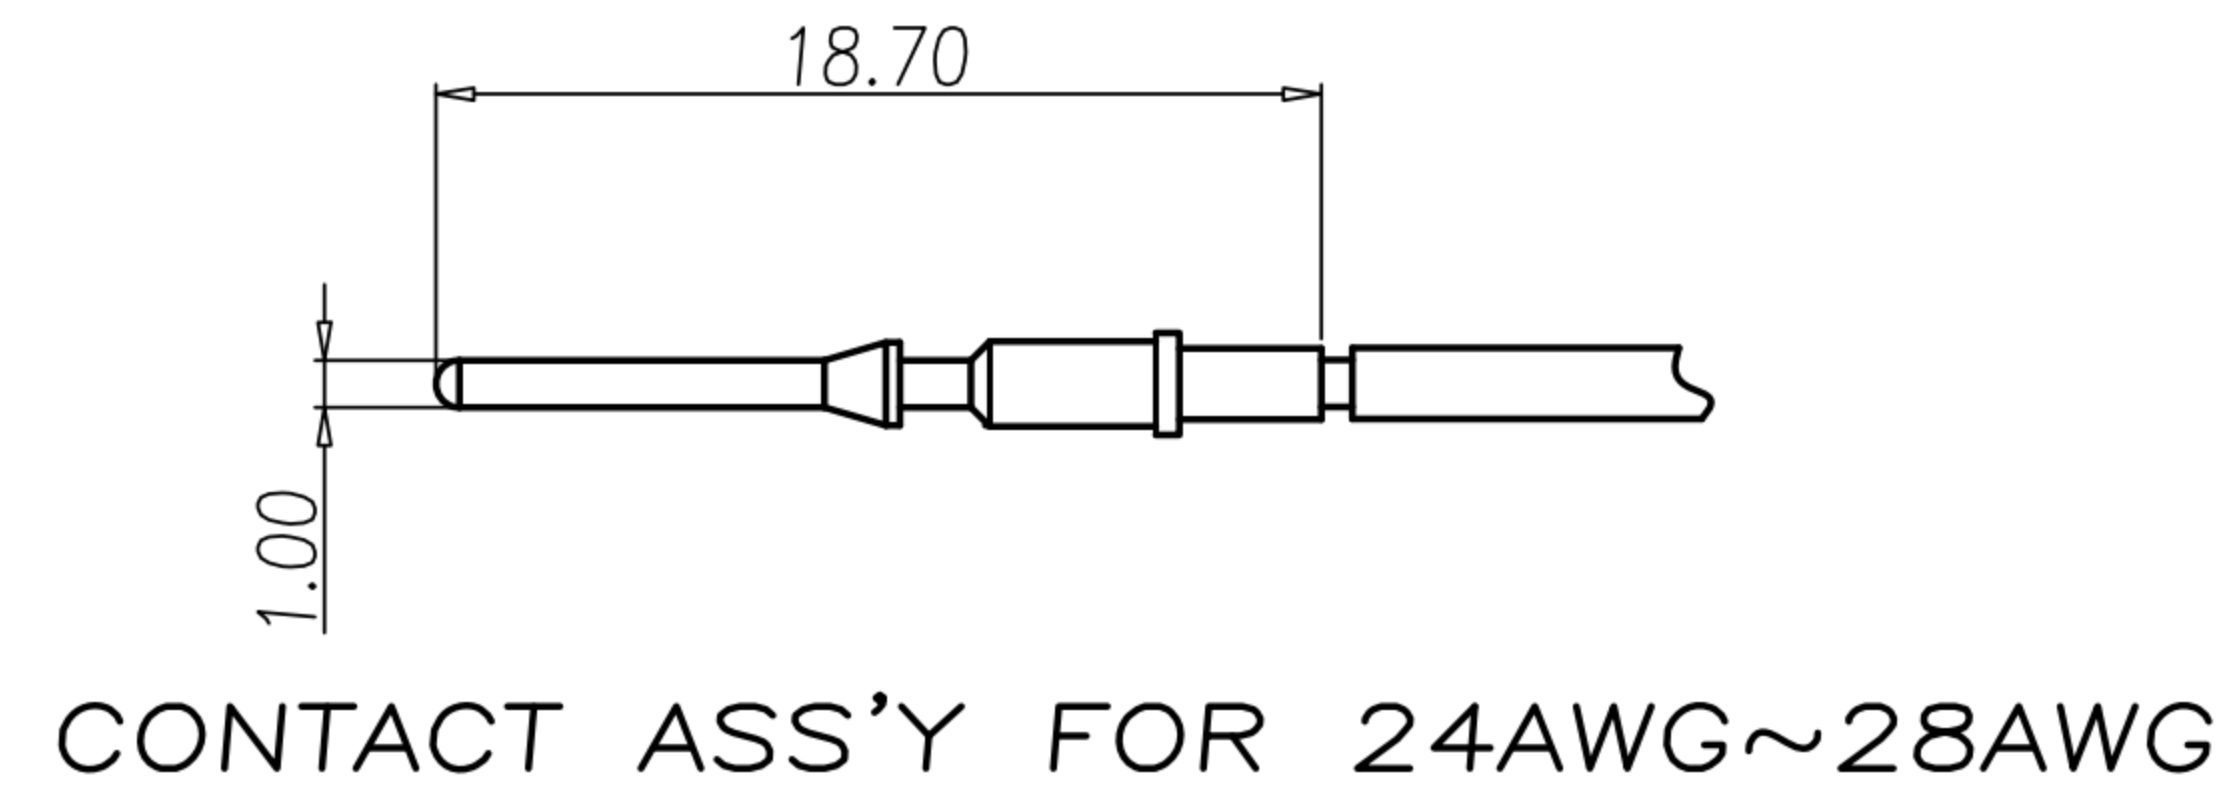

1. MATERIAL :
- 1-1. MATERIAL A :
- a. HOUSING : PBT UL94V-0 ; COLOR : BLACK.
 - b. CONTACT : BRASS
 - c. NUT : ALUMINIUM ALLOY
 - d. SHELL : ALUMINIUM ALLOY
 - e. BACK HOUSING : PBT UL94V-0 ; COLOR : BLACK.
 - f. SPRING : BERYLLIUM COPPER
- 1-2. MAIN BODY : ALUMINIUM ALLOY
- 1-3. GLAND : SILICONE ; COLOR : BLACK.
- 1-4. GLAND CAGE : POM ; COLOR : BLACK.
- 1-5. GLAND NUT : ALUMINIUM ALLOY
- 1-6. O-RING : SILICONE ; COLOR : BLACK
2. FINISH :
- 2-1. MATERIAL A :
- a. CONTACT : GOLD FLASH MICRO INCHES MIN.
 - UNDER PLATE : NICKEL.
 - b. NUT : SATIN NICKEL PLATED.
 - c. SHELL : SATIN NICKEL PLATED.
 - d. SPRING : NICKEL PLATED.
- 2-2. MAIN BODY : SATIN NICKEL PLATED.
- 2-3. GLAND NUT : SATIN NICKEL PLATED.
3. ELECTRICAL SPECIFICATION :
- 3-1. Rated current : 4A
- 3-2. Rated voltage : 250V
- 3-3. Water proof : IPX7
4. Environmental :
- 4-1. Operation Temperature : -20℃~85℃

DRAWN	Ku Chou	APP'D	Emily Suen	UNIT	mm	TOLERANCE		广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	TITLE	M12 4PIN(M) D-code Crimp pin type			SHEET
CHK'D	Emily Suen			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°			PART NO.	WP-04M2-130-11	DWG NO.	QC7503	VERSION A