

CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Ku Chou	01/11/18*	
B				
C				




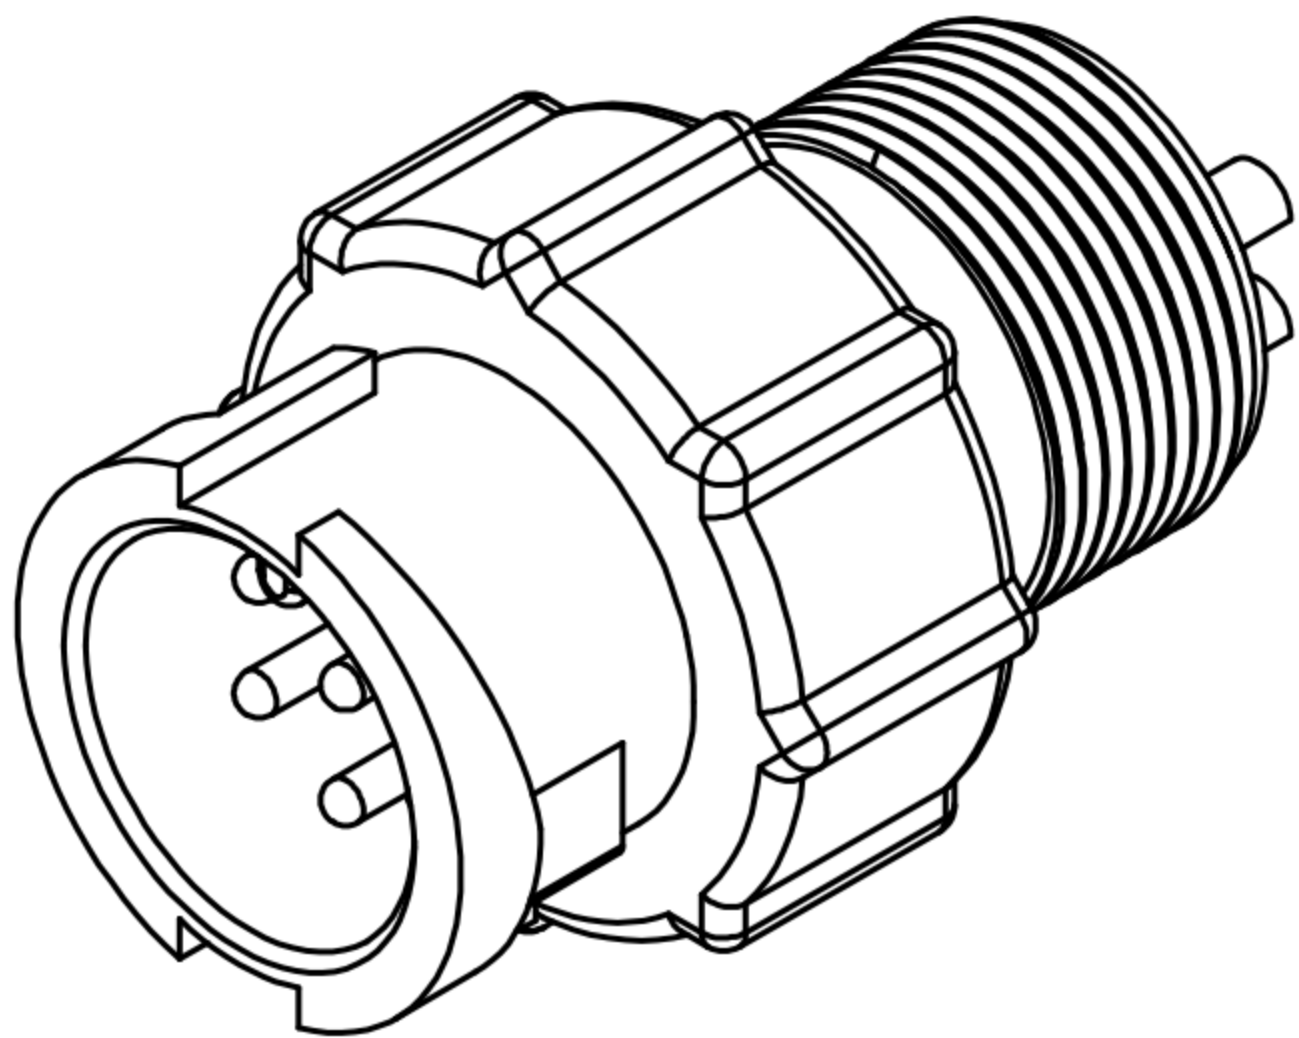


TABLE A

4 PIN	5 PIN	6 PIN
WP-04M1-03-11	WP-05M1-05-11	WP-06M1-02-11

PIN ASSIGMENTS
FRONT VIEW

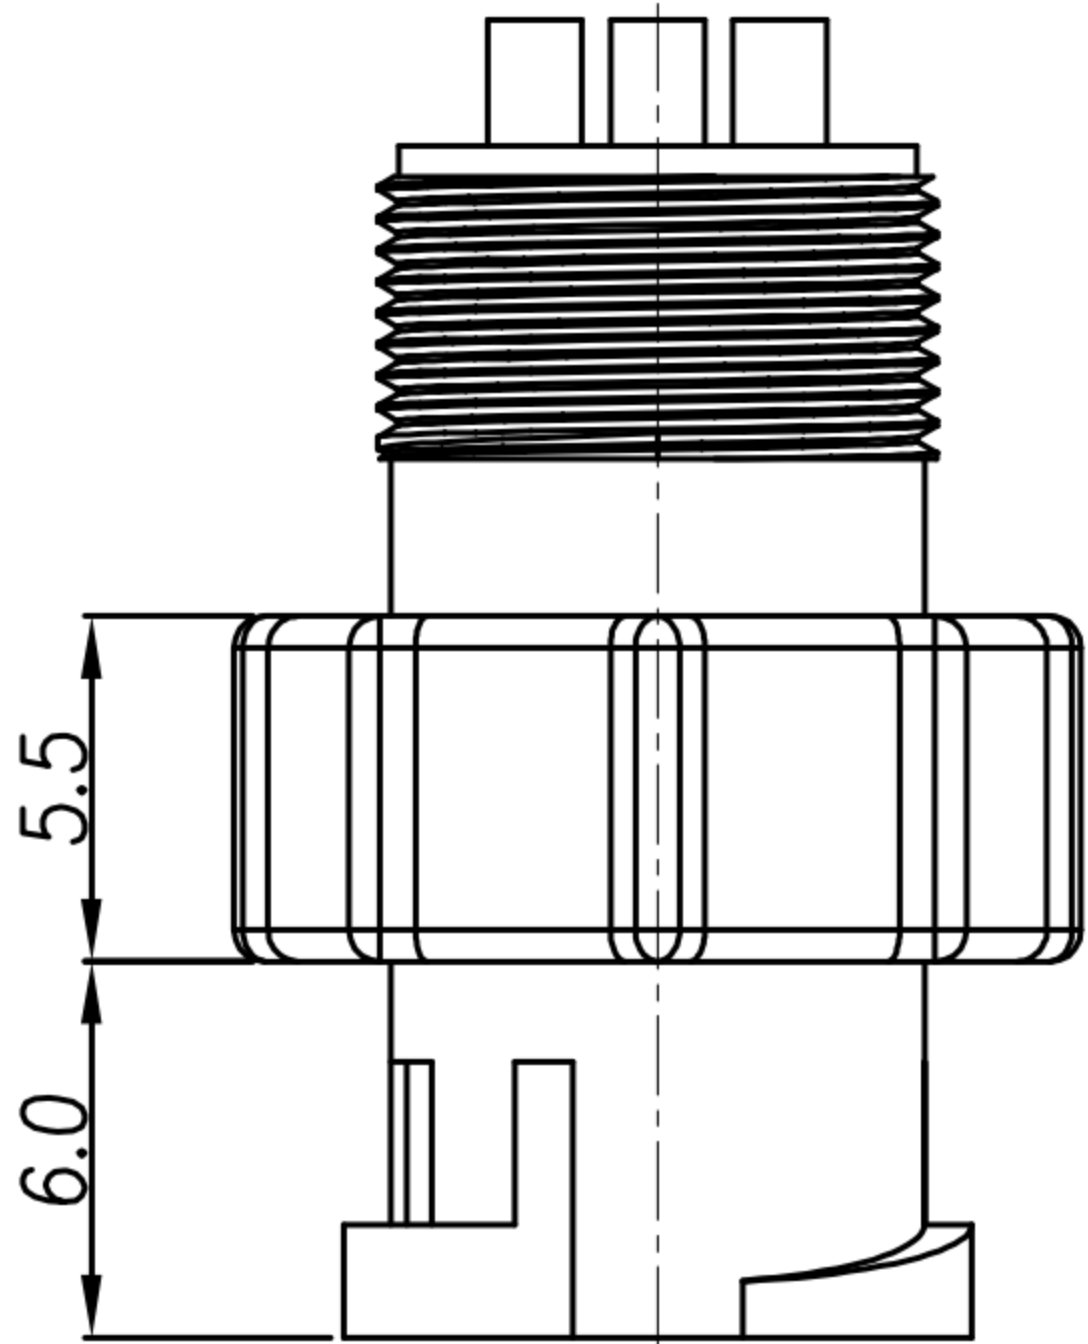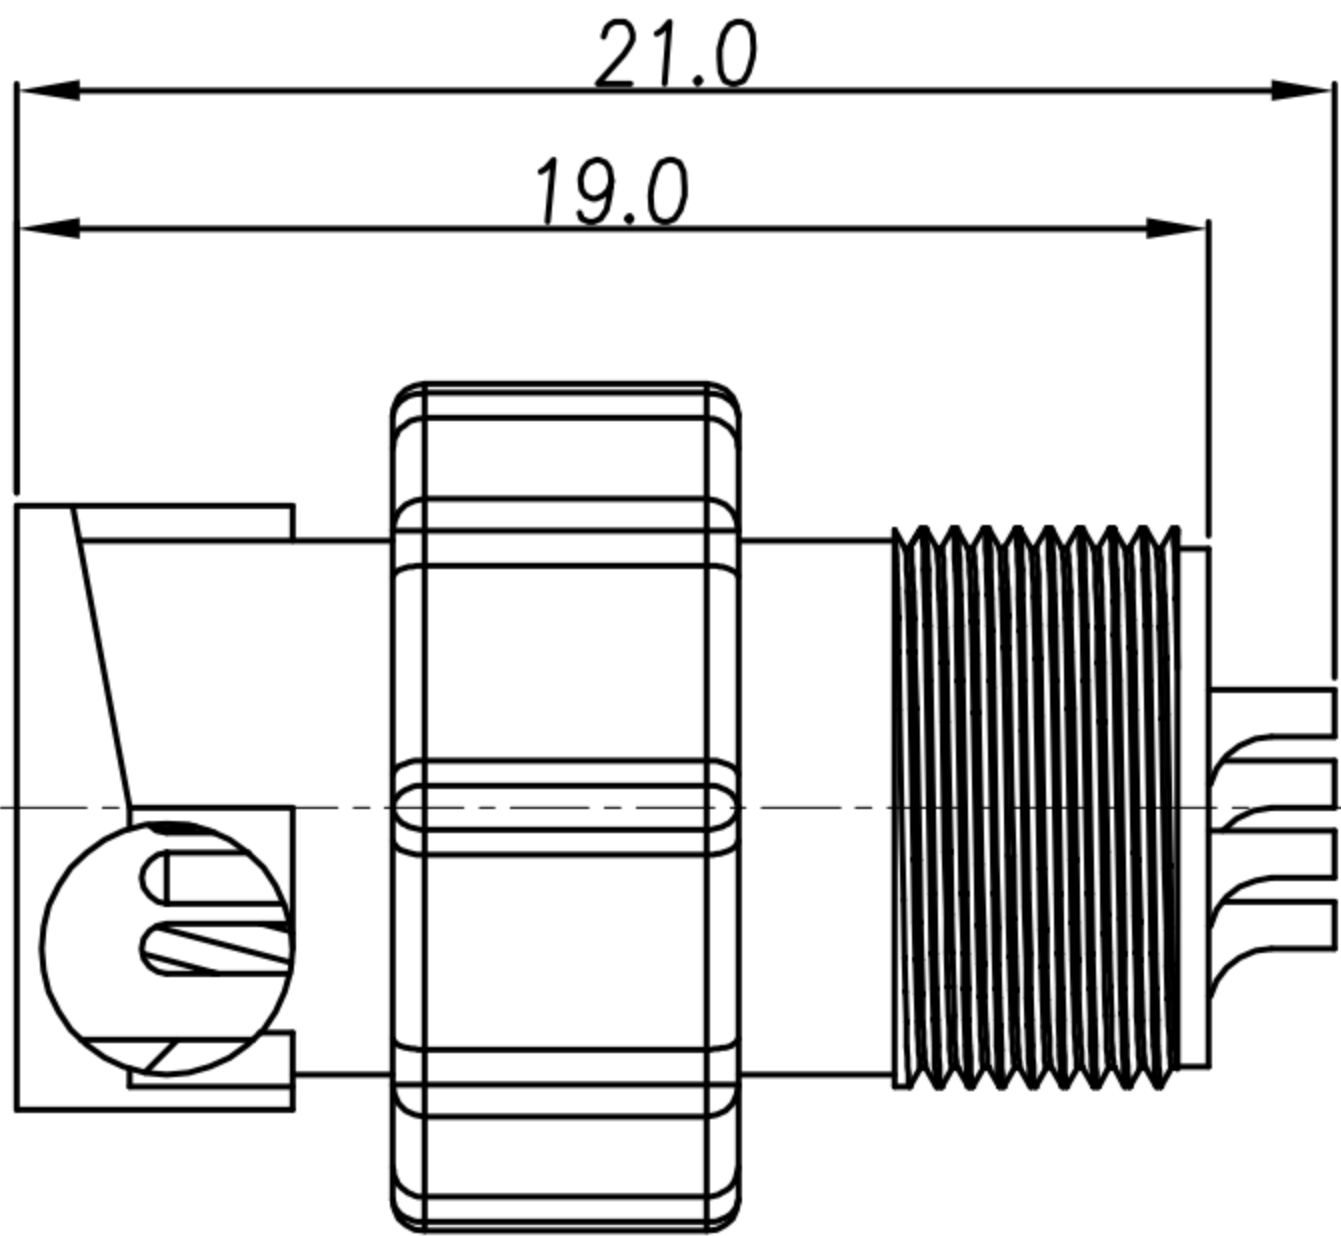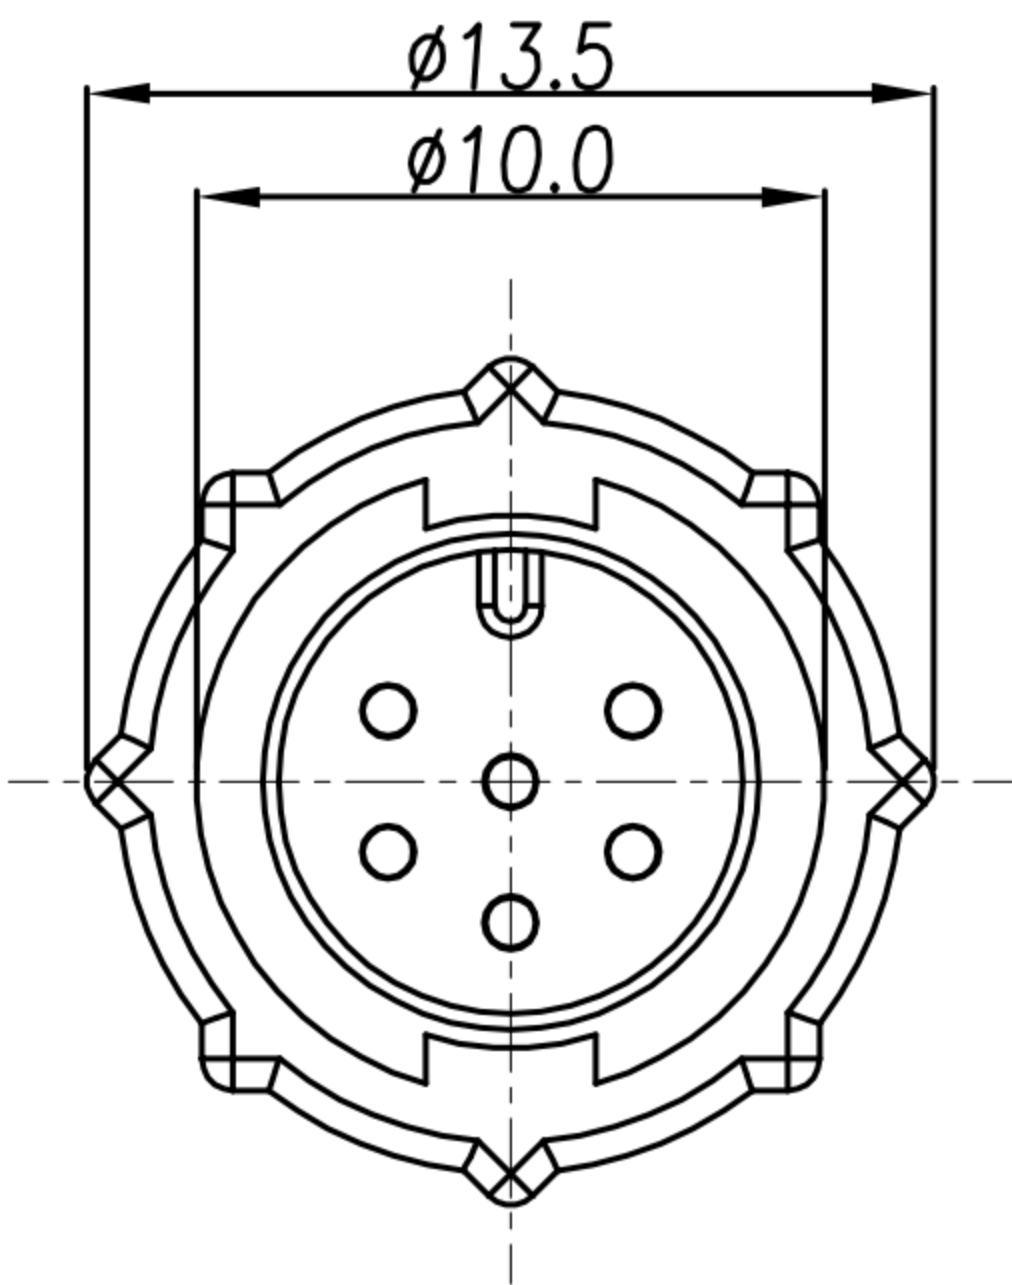

1. MATERIAL :
- 1-1. HOUSING : PA66
1-2. CONTACT : BRASS
2. FINISH :
- 2-1. CONTACT : GOLD FLASH PLATED.
3. ELECTRICAL SPECIFICATION :
- 3-1. Rated current : 2A
3-2. Rated voltage : 250V
3-3. Water proof : IP67
4. Environmental :
- 4-1. Operation Temperature : -20℃~80℃

DRAWN	Emily Suen	APP'D	Ku Chou	UNIT	mm	TOLERANCE				广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	TITLE	WP (M CONN. M PIN) (LOCK) A SIZE 焊線式-2A			SHEET
CHK'D	Ku Chou			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°					PART NO.	SEE TABLE A	DWG NO.	QC8929	VERSION A