
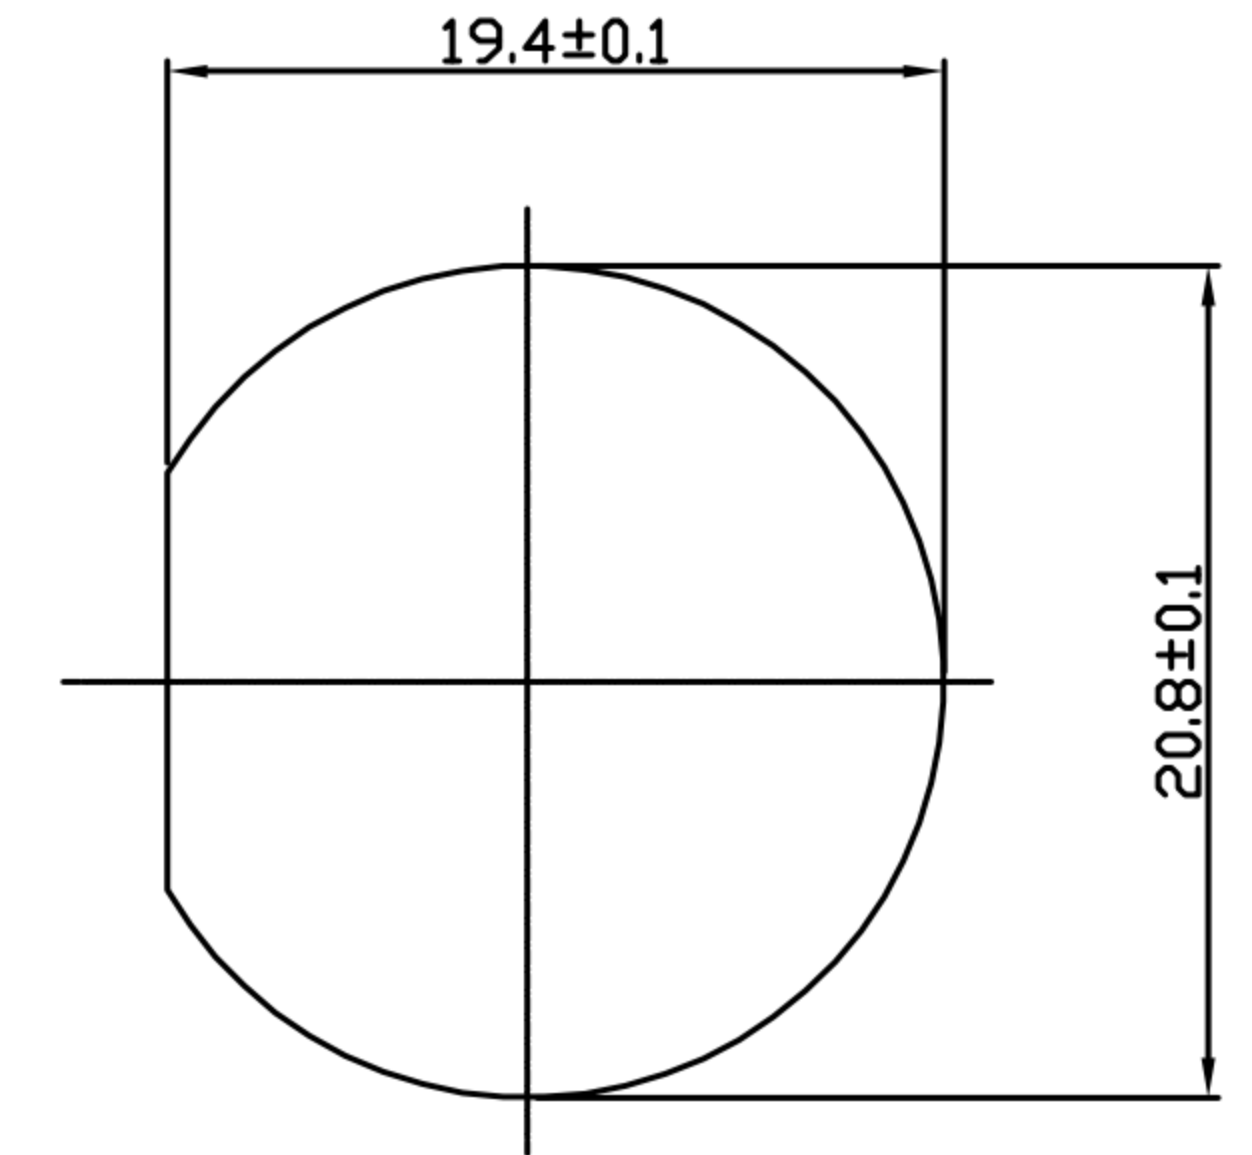
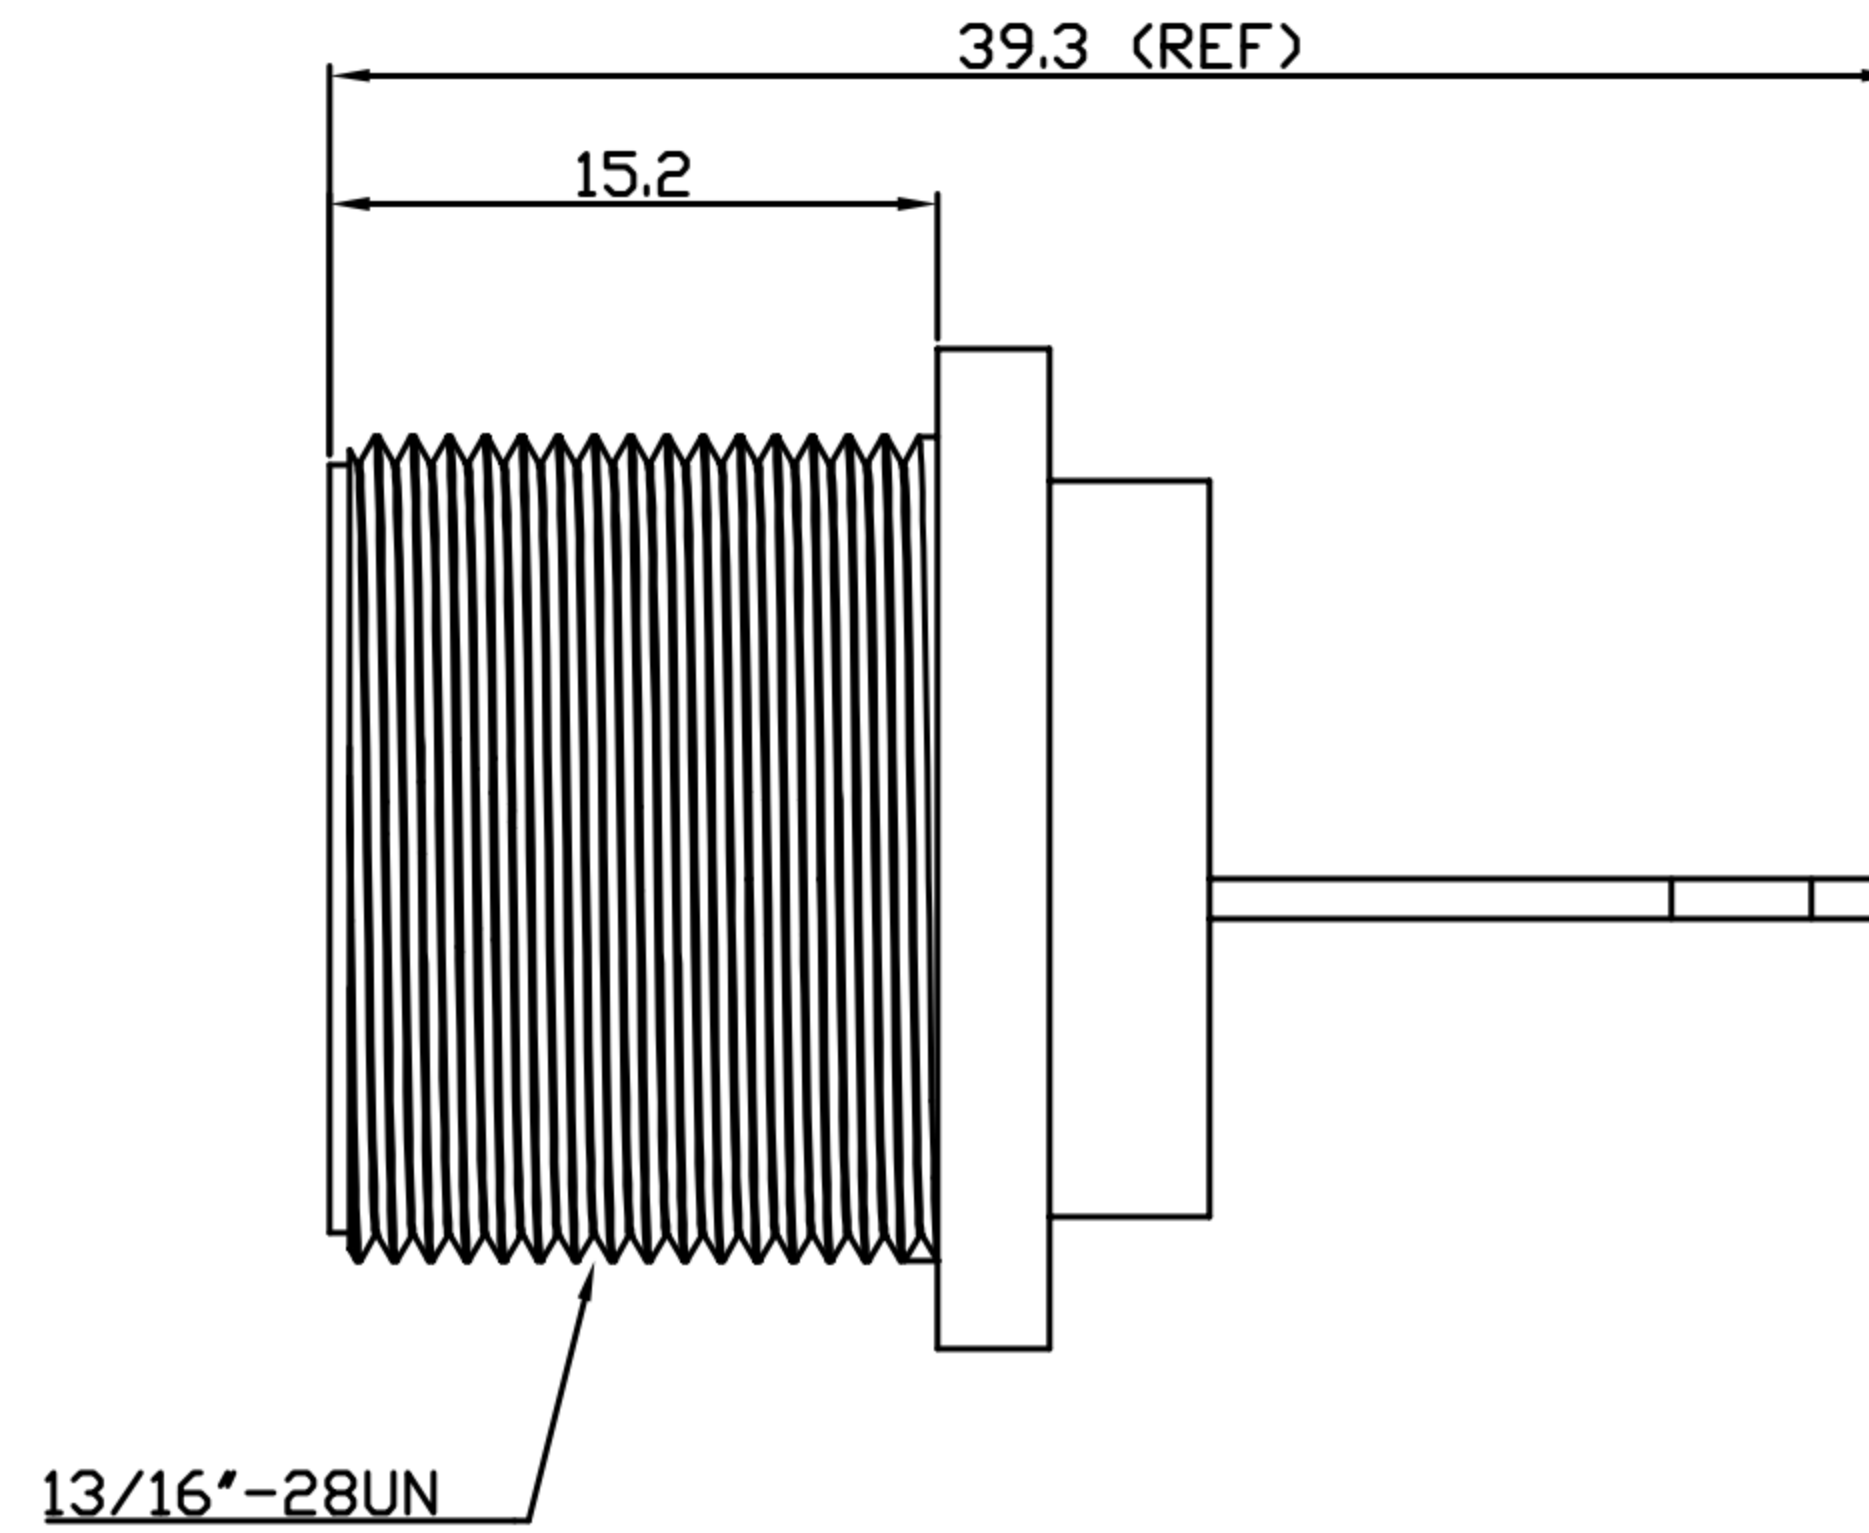
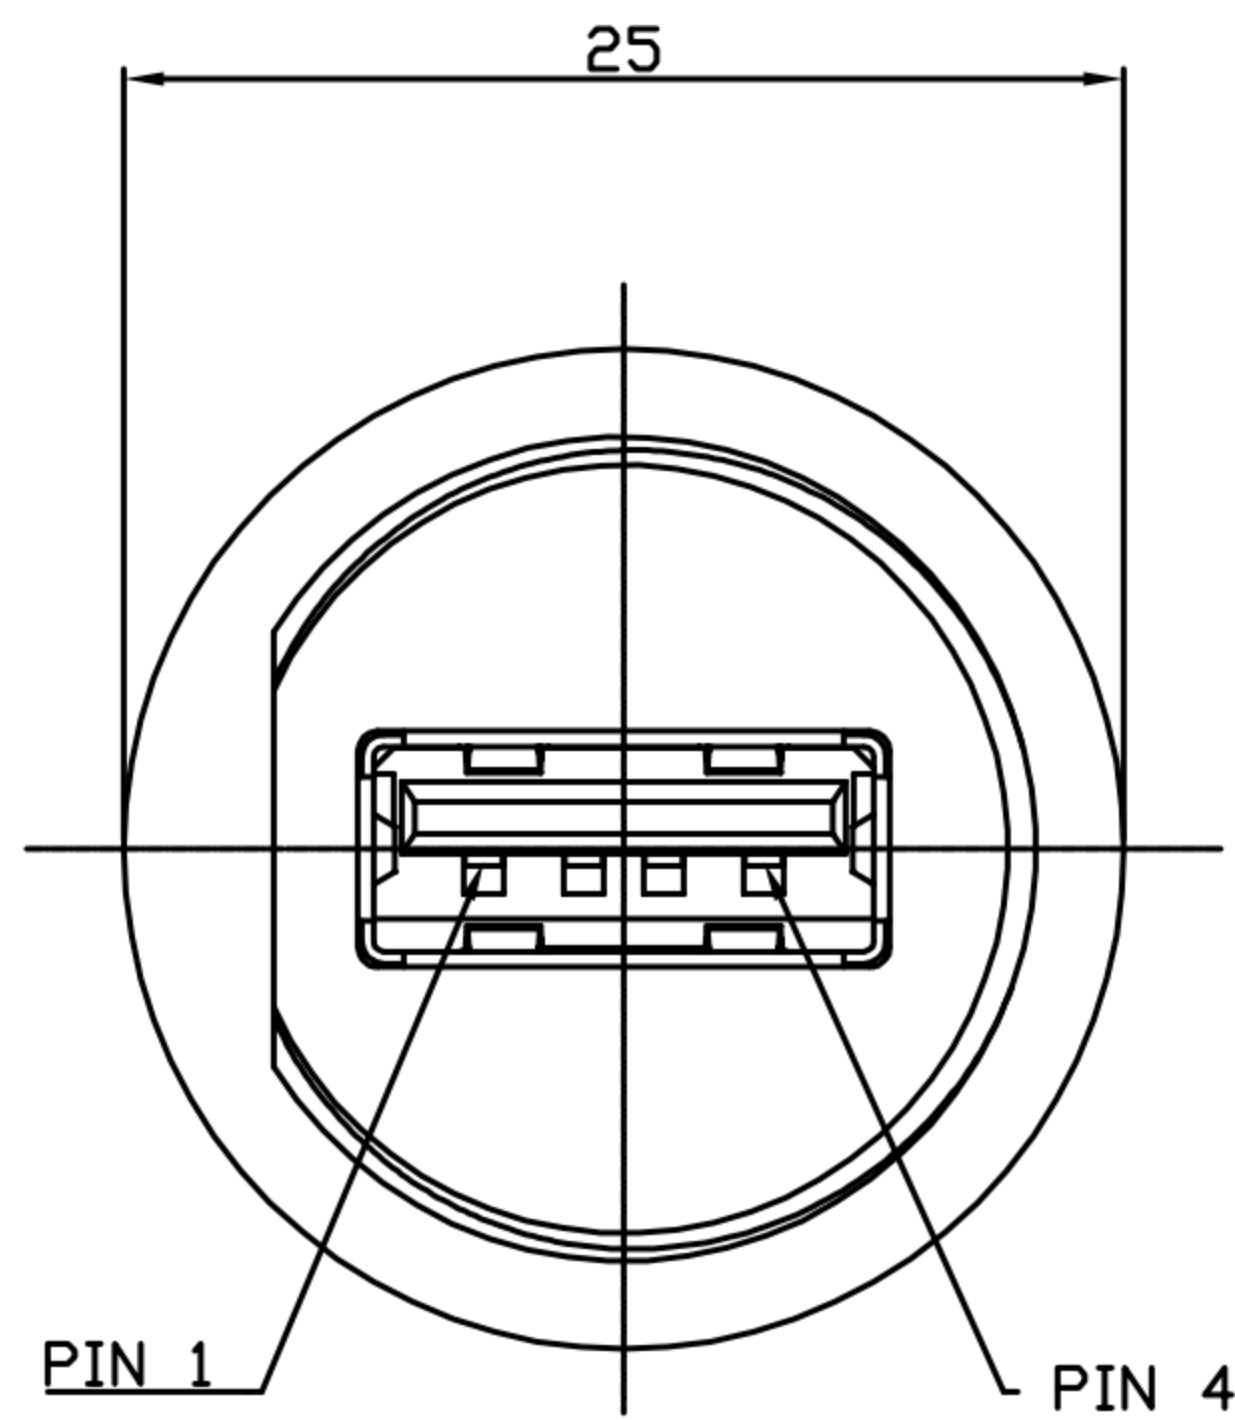
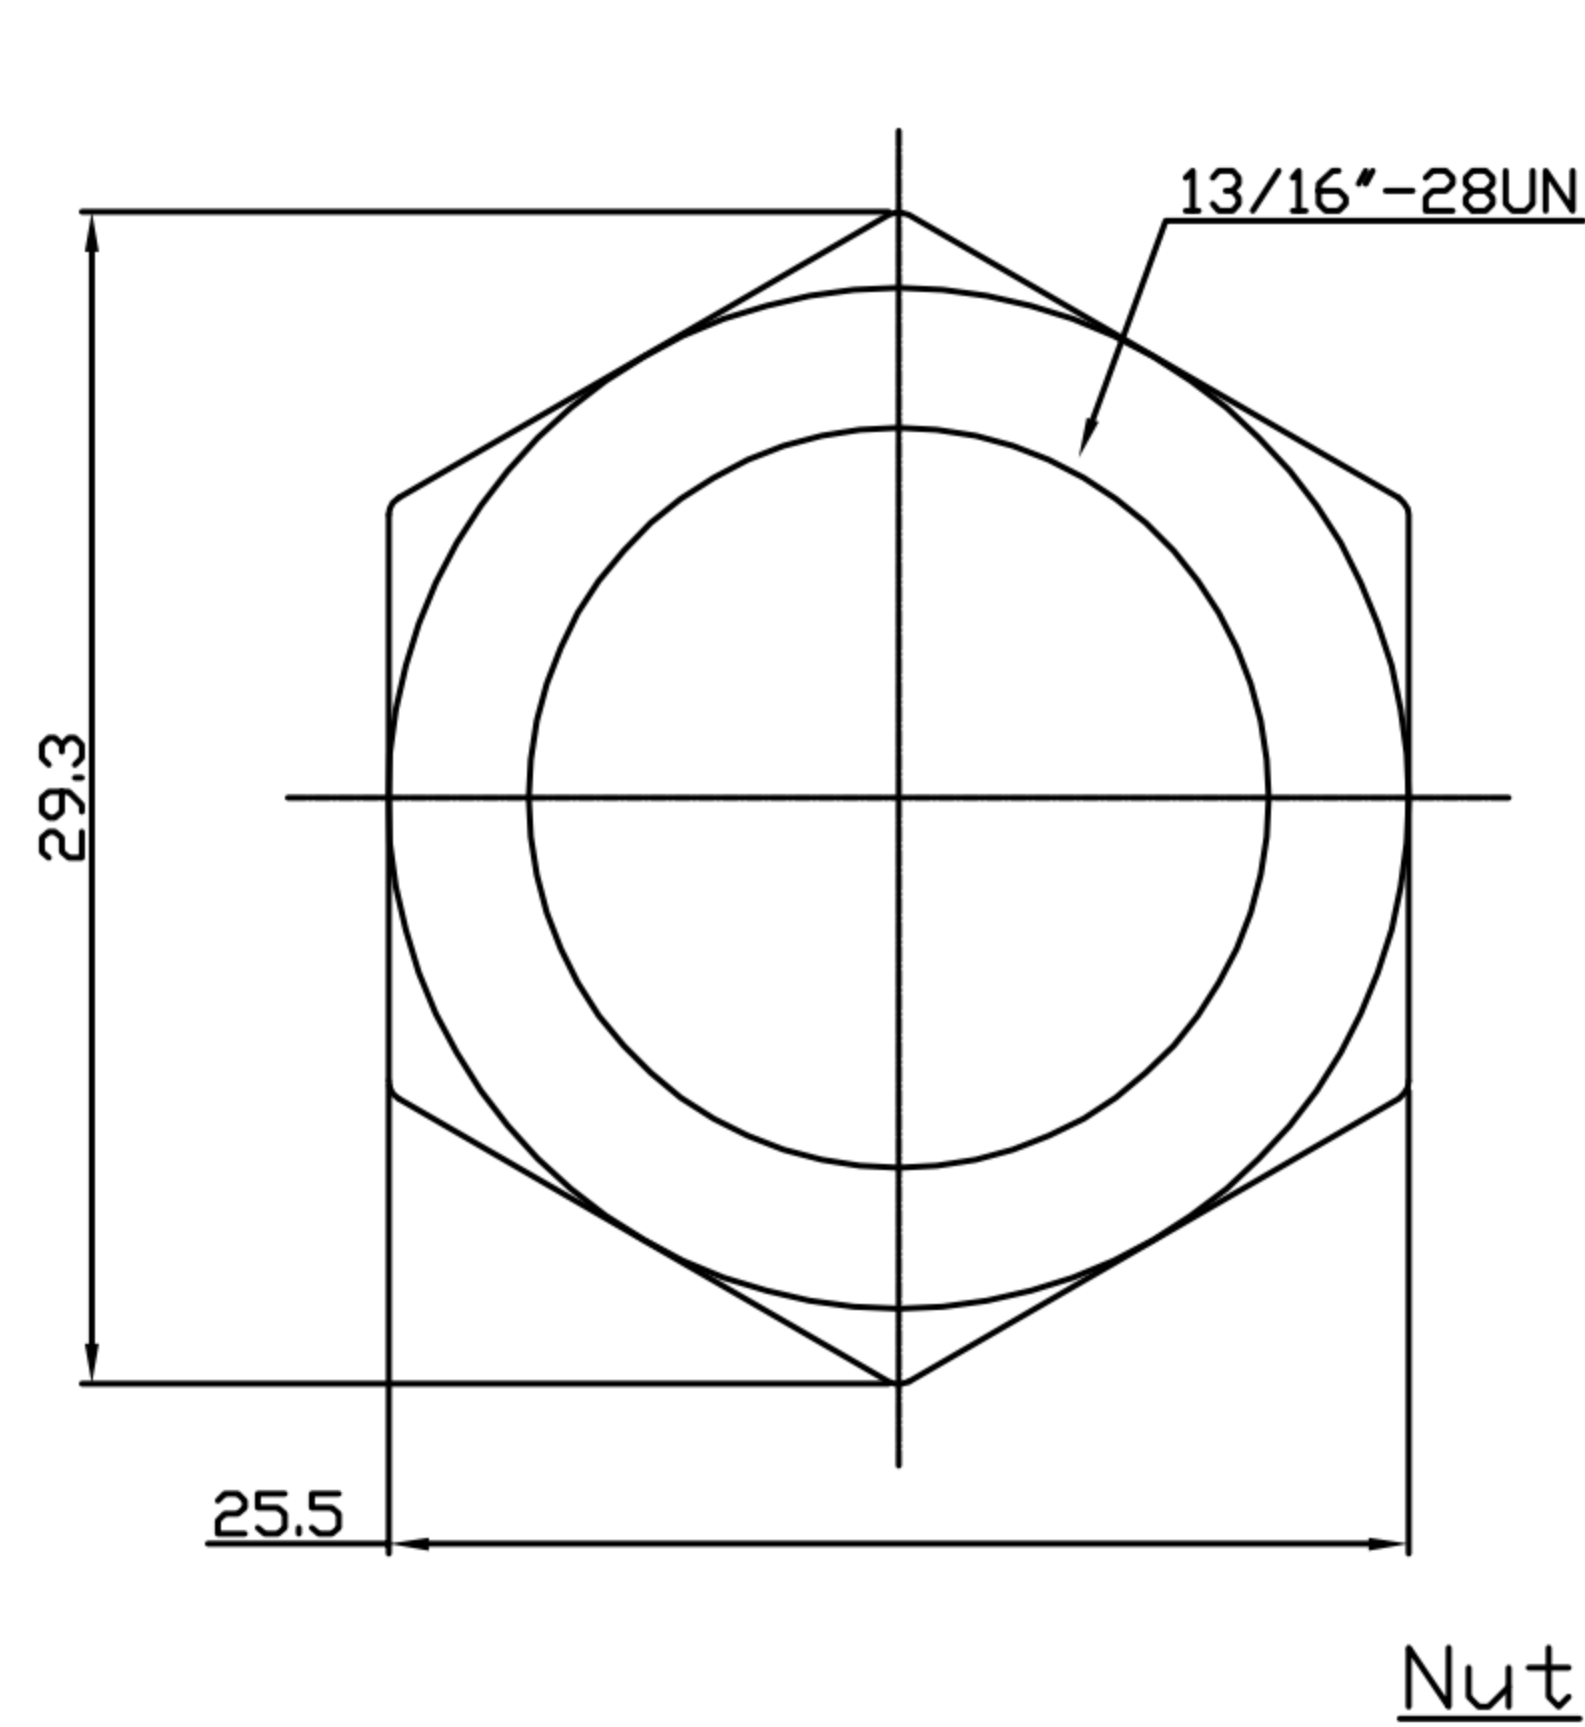


CUSTOMER DRAWING



REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Yeh Chou	04/19/19*	
B				
C				

Recommended
Panel Cut-Out

Nut

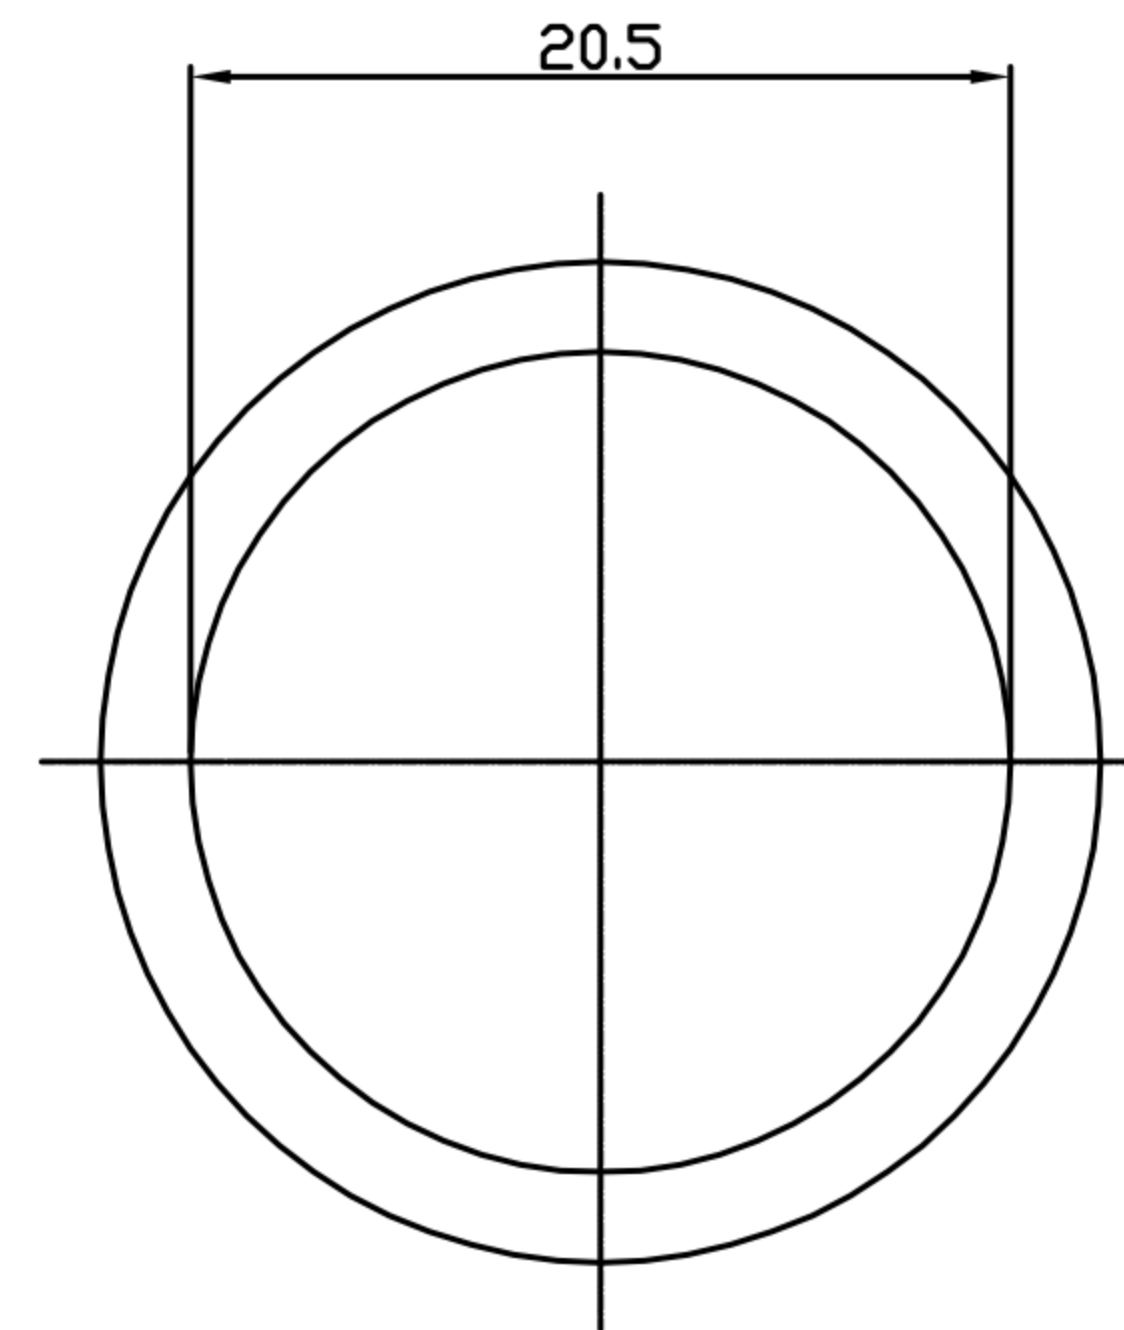

Gasket

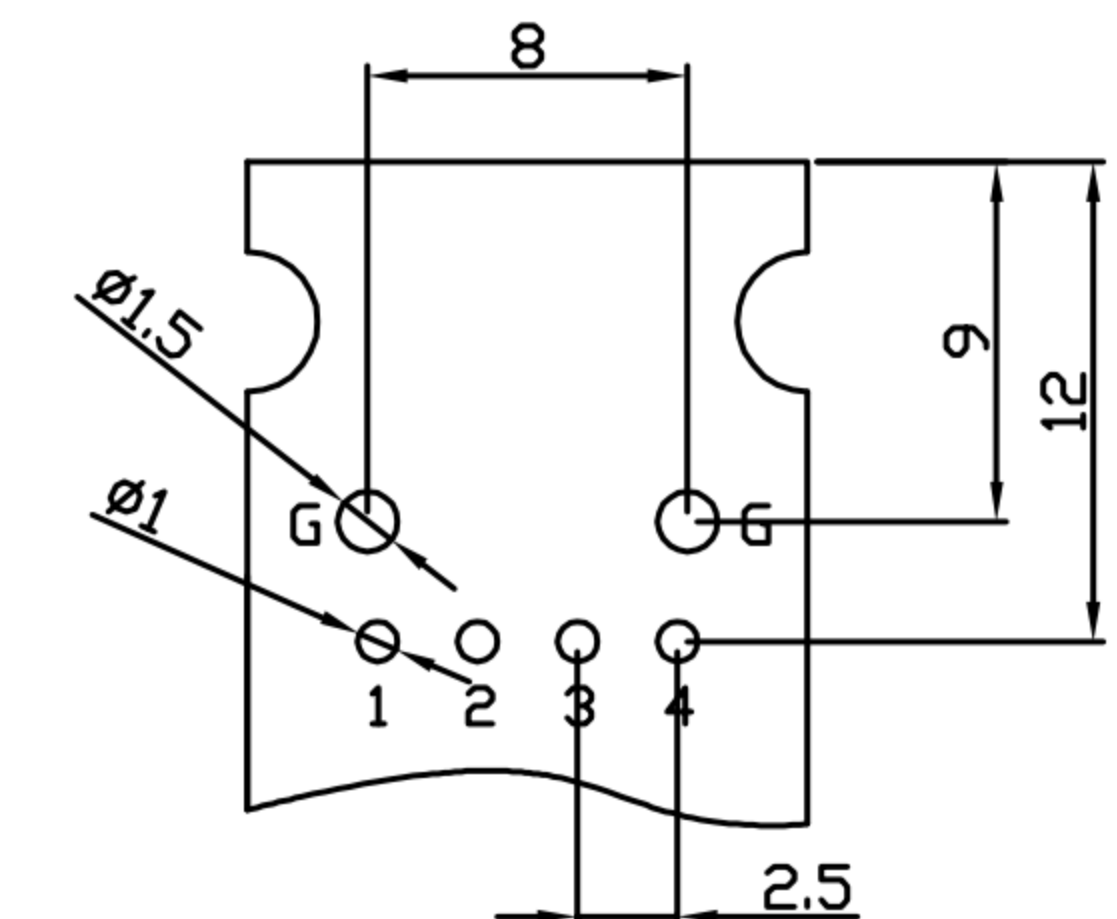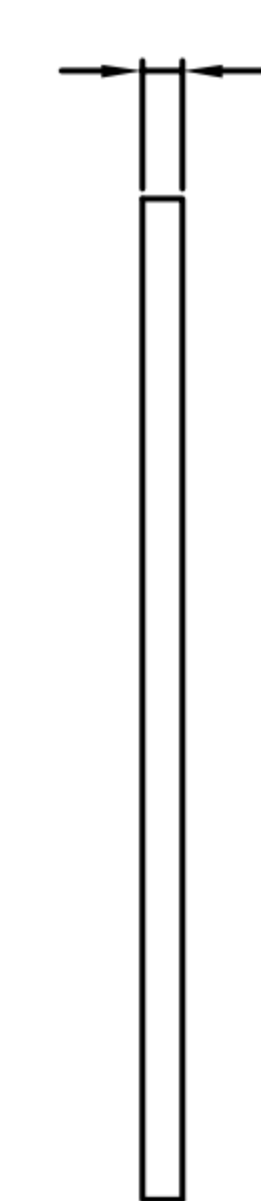P.C.B LAYOUT
TOP VIEW

- MATERIAL :
1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK.
1-2. CONTACT : PHOSPHOR BRONZE
1-3. SHELL : PA66 UL94V-0 ; COLOR : BLACK.
1-4. GROUND : BRASS
1-5. GASKET : SILICONE ; COLOR : GRAY BLACK.
1-6. NUT : PA66
- FINISH :
2-1. CONTACT : GOLD FLASH PLATED
2-2. GROUND : NICKEL PLATED.
- ELECTRICAL SPECIFICATION :
3-1. Rated current : 1.5A
3-2. Rated voltage : 250V AC
3-3. Water proof : IPX7
- Environmental :
4-1. Operation Temperature : -20℃~85℃

DRAWN	Yeh Chou	APP'D	KU Chou	UNIT	mm	TOLERANCE		广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	TITLE	防水USB(F) 鍍板式(前鍍)(帶PCB)			SHEET
CHK'D	KU Chou			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°			PART NO.	US-04F3-38-11	DWG NO.	QC9249	VERSION A