

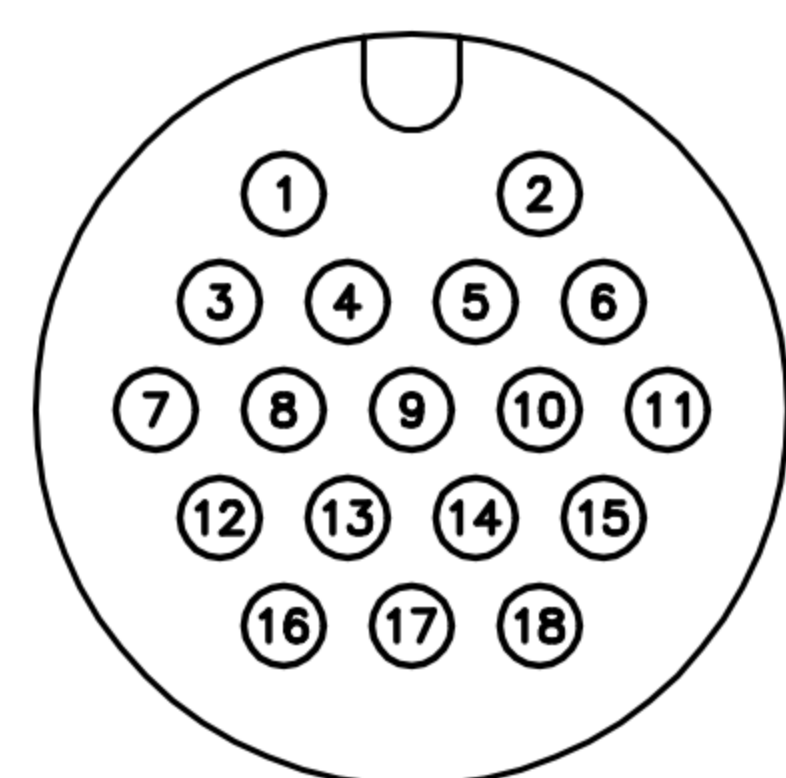
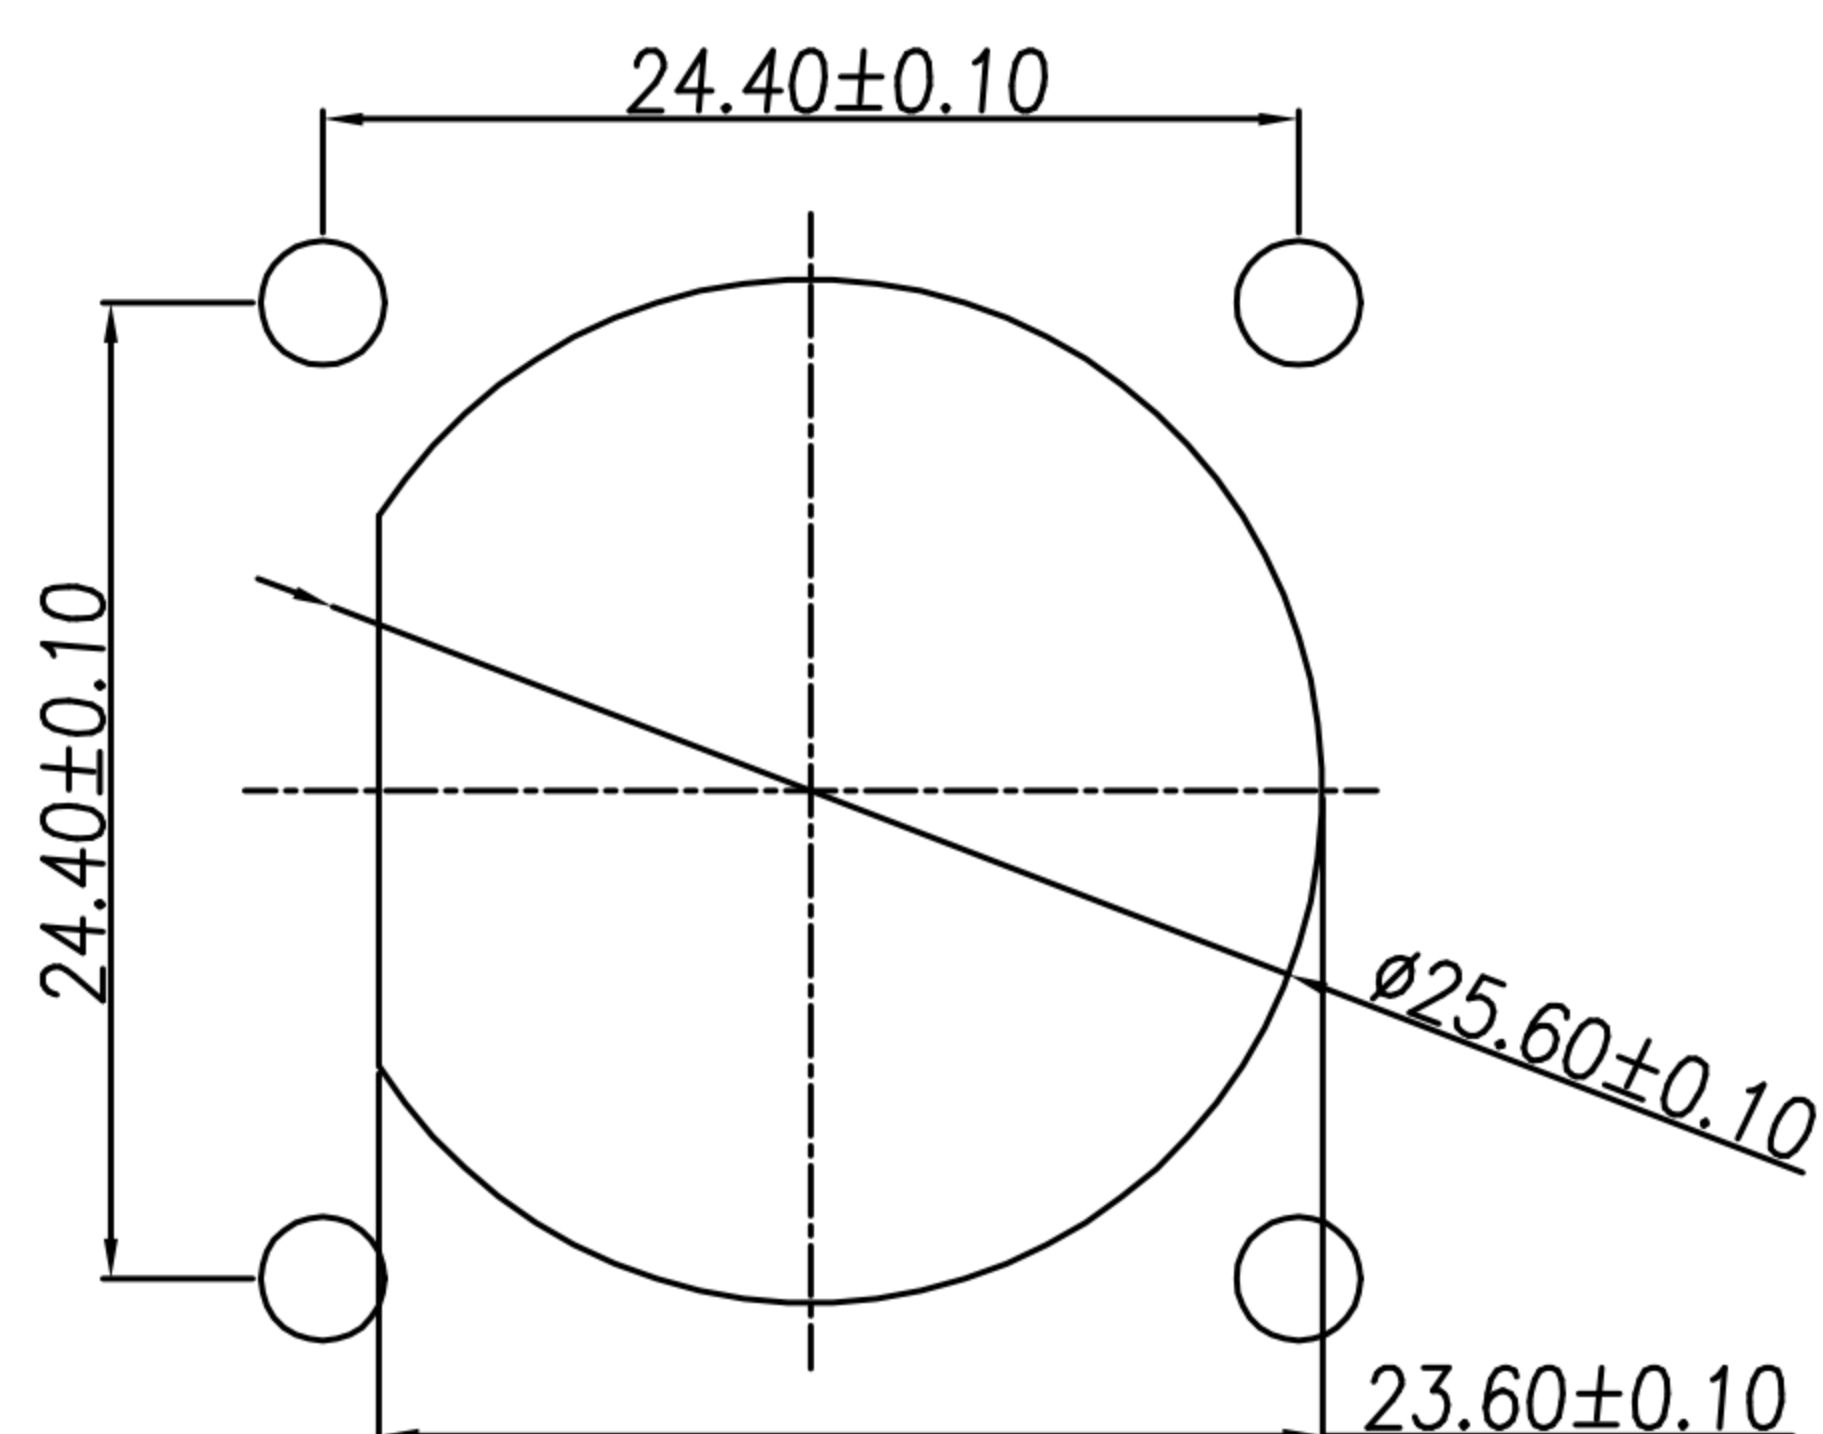
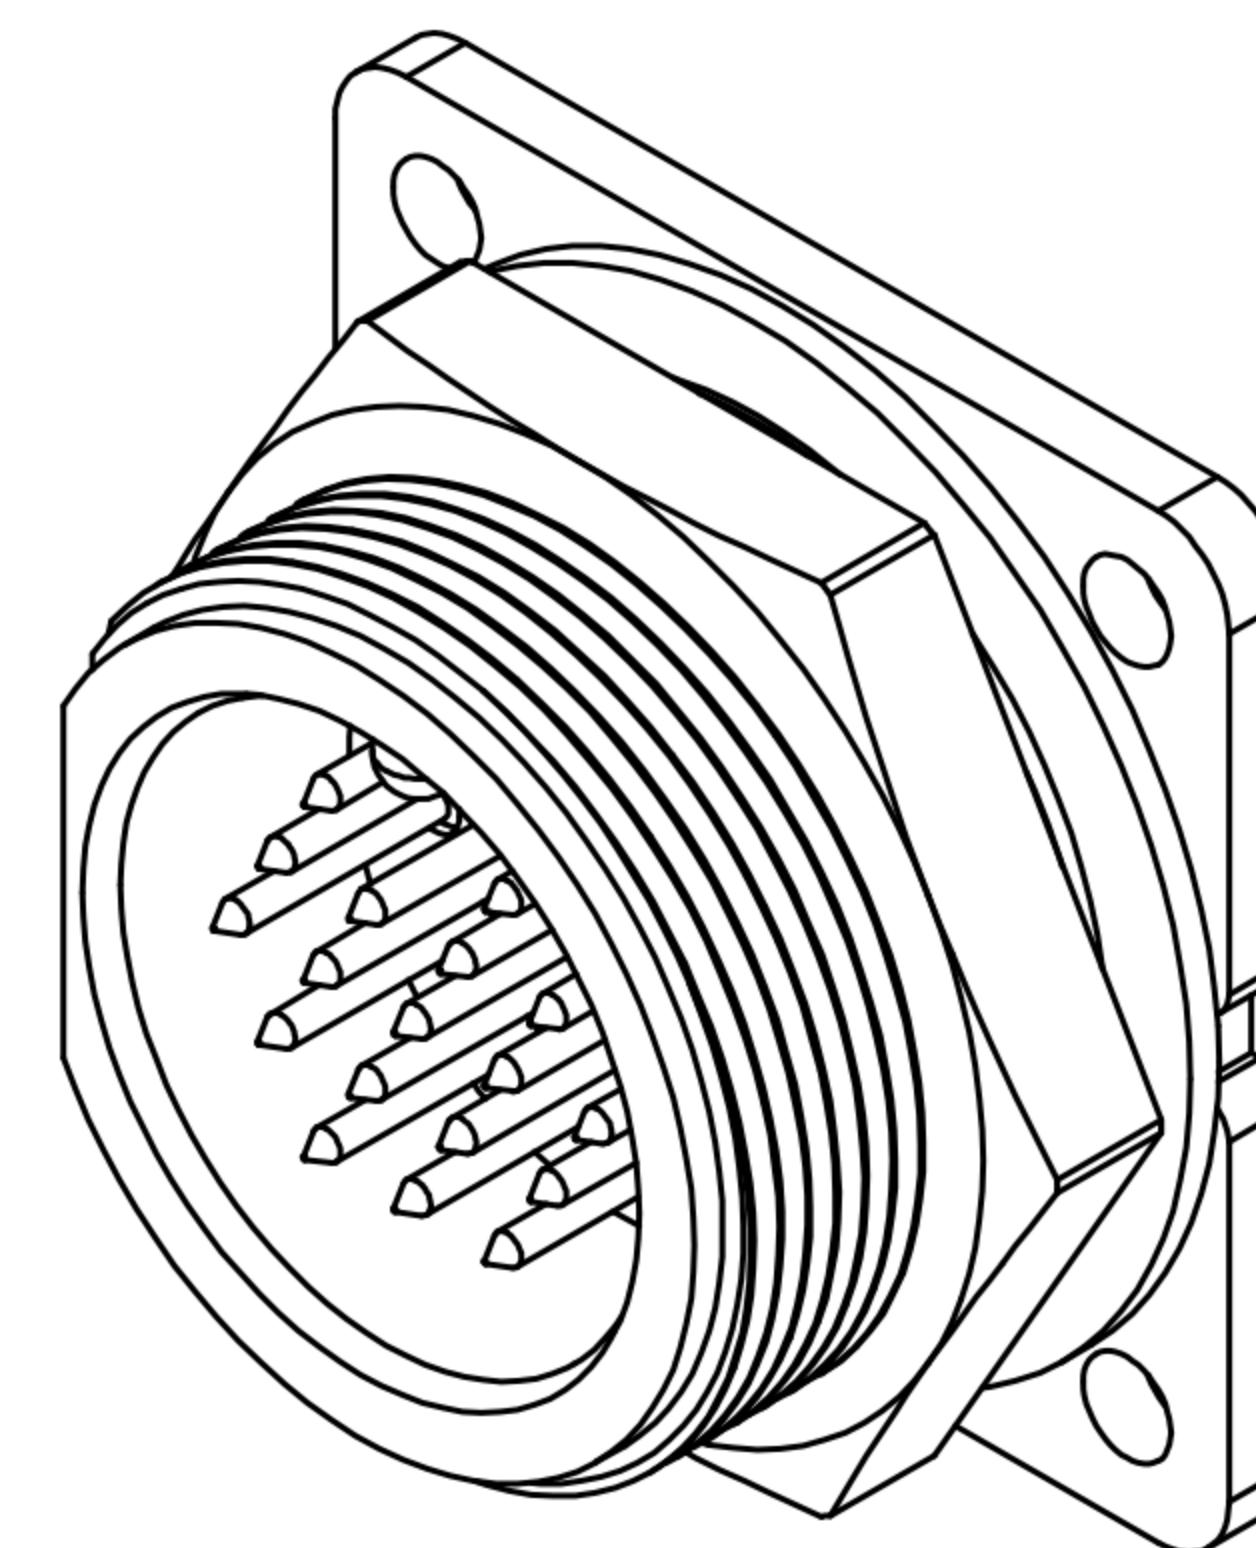


## CUSTOMER DRAWING


| REV. | DESCRIPTION         | APPROVED BY | DATE       | ECN NO. |
|------|---------------------|-------------|------------|---------|
| A    | RELEASE             | Yeh Chou    | 2017/09/07 |         |
| B    | 增加剖視圖 & 修正墊圈材質與電度規格 | Ku Chou     | 02/05/18   |         |
| C    |                     |             |            |         |

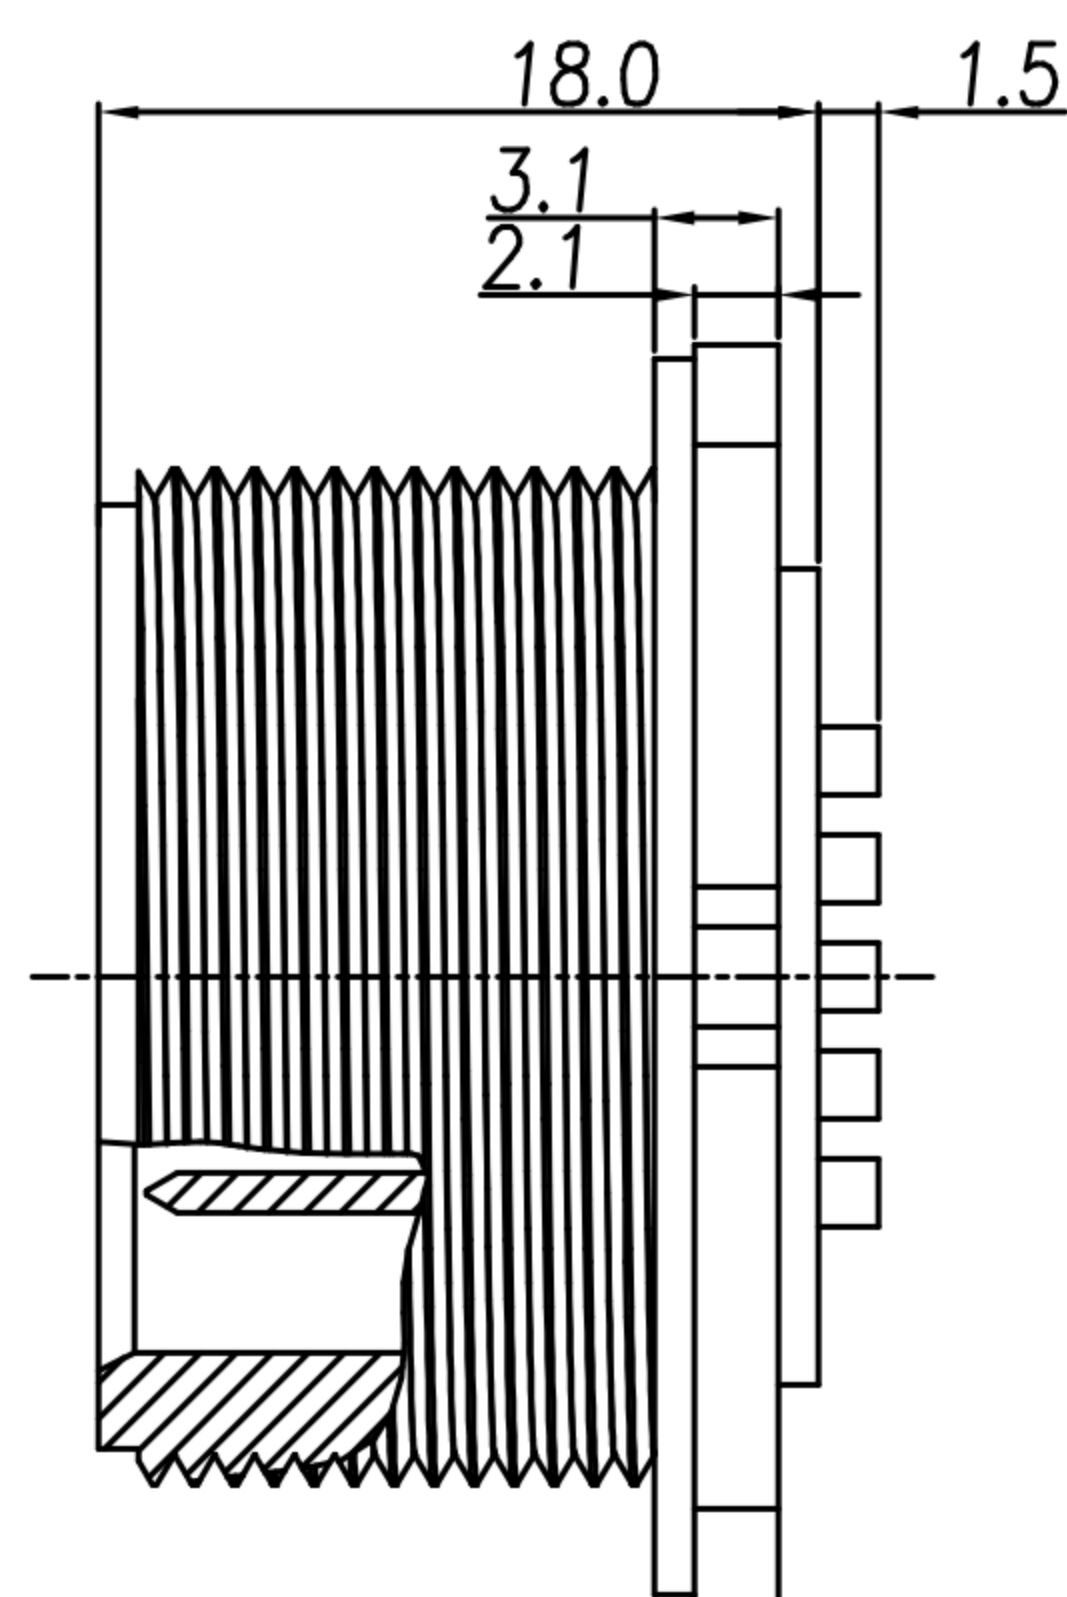

PIN CONFIGURATION

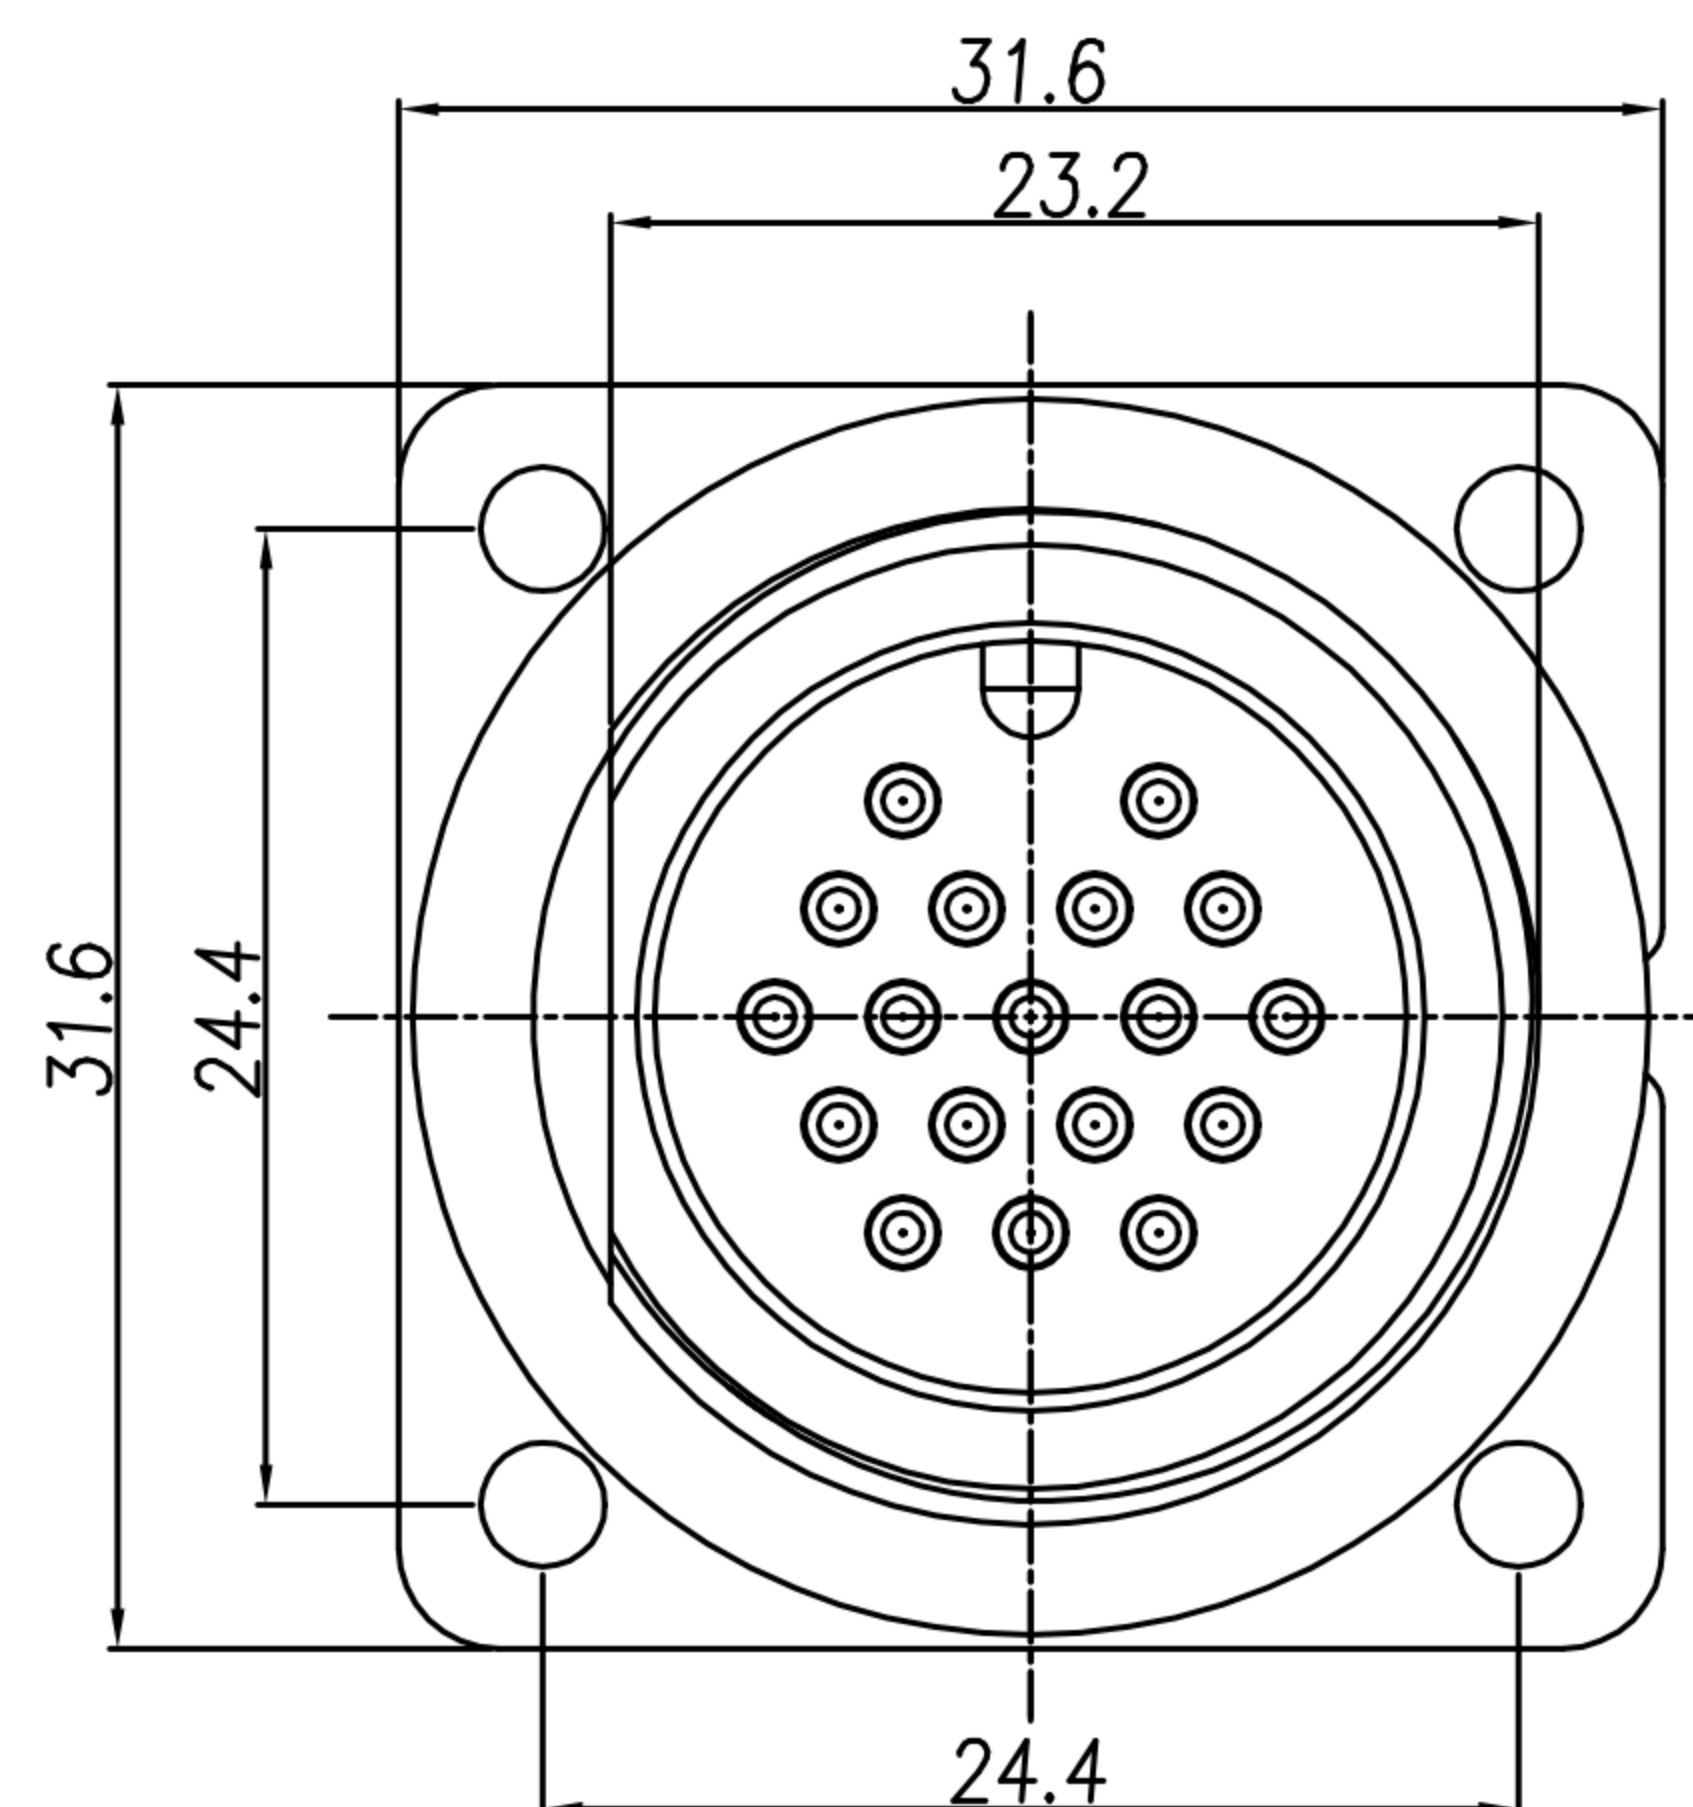

RECOMMEND PANEL HOLE

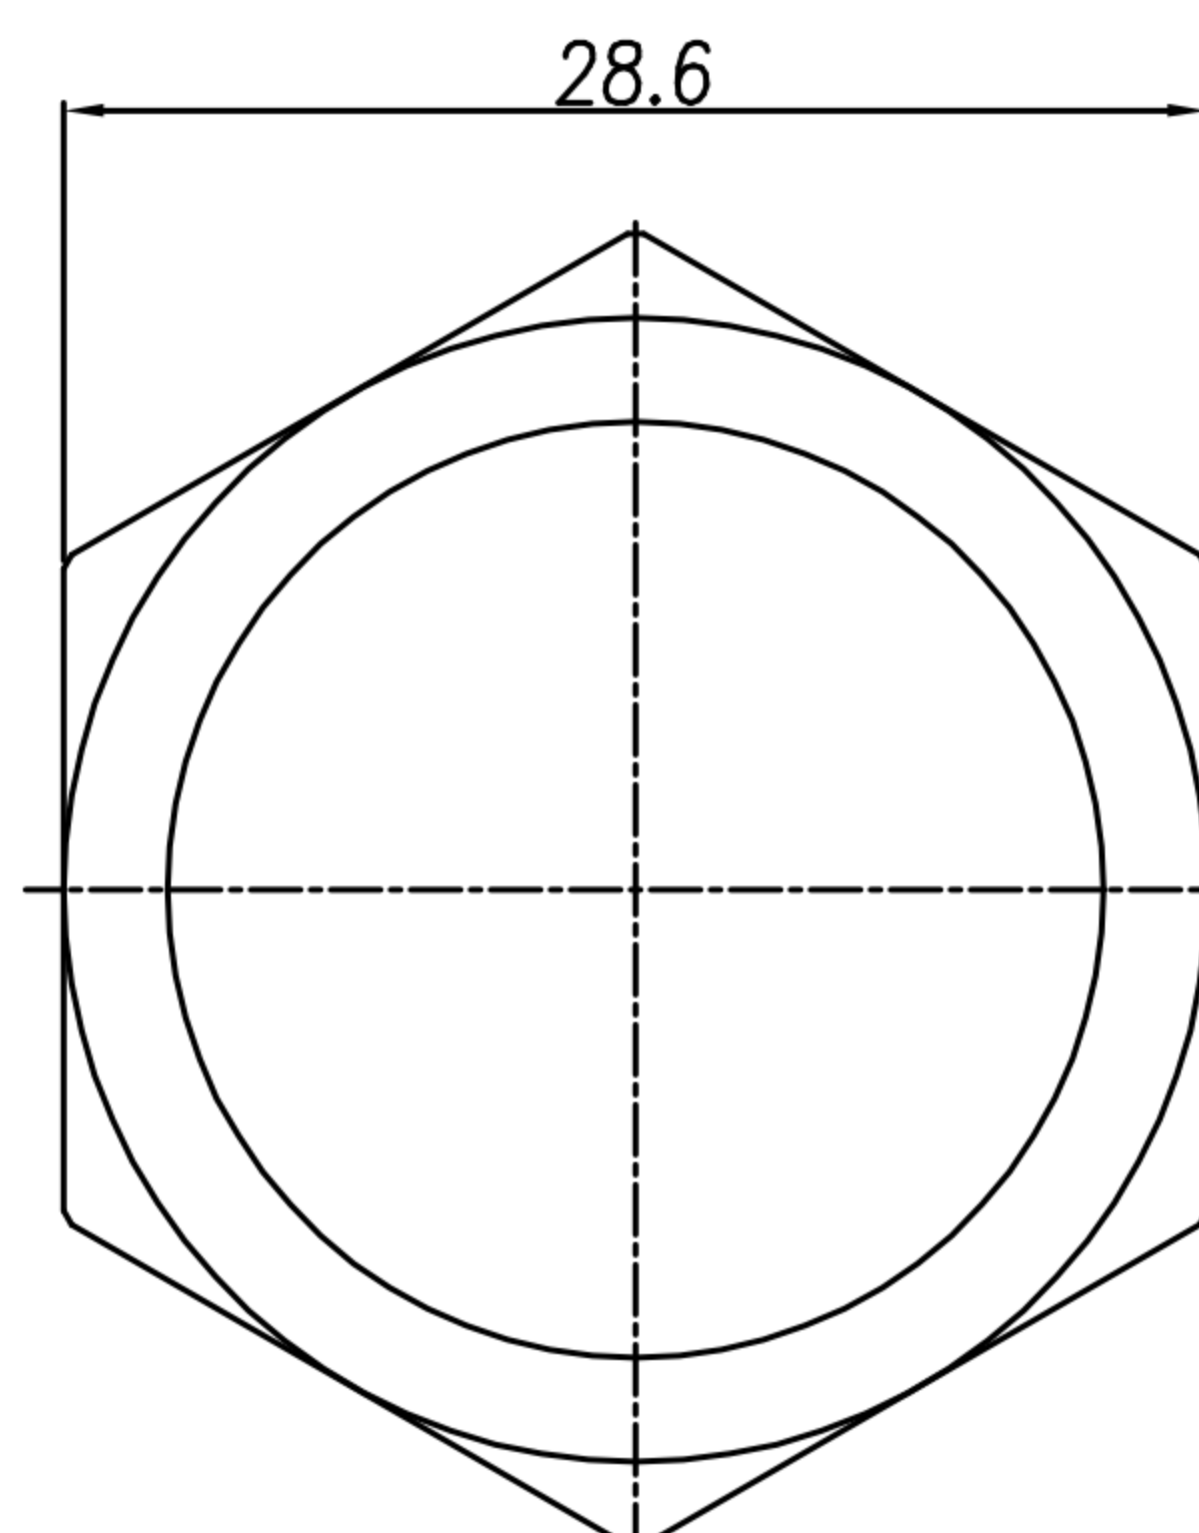

Hex Nut

- MATERIAL :
  - 1-1. HOUSING : PA66
  - 1-2. CONTACT : BRASS
  - 1-3. GASKET : SILICONE
  - 1-4. HEX NUT : PA66
- FINISH :
  - 2-1. CONTACT : GOLD FLASH PLATED
- ELECTRICAL SPECIFICATION :
  - 3-1. Rated current : 5A
  - 3-2. Rated Voltage : 300V
- Environmental :
  - 4-1. Operation Temperature : -40℃~105℃

|       |          |       |         |       |     |                                                                  |  |                                                                      |          |                               |         |        |              |
|-------|----------|-------|---------|-------|-----|------------------------------------------------------------------|--|----------------------------------------------------------------------|----------|-------------------------------|---------|--------|--------------|
| DRAWN | Yeh Chou | APP'D | KU Chou | UNIT  | mm  | TOLERANCE                                                        |  | 广东科斯达电子科技有限公司<br>GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD. | TITLE    | D SIZE 18P (M) 螺牙平口焊線式 (方型檔板) |         |        | SHEET        |
| CHK'D | KU Chou  |       |         | SCALE | 1:1 | .x ±0.20<br>.xx ±0.10<br>.xxx ±0.05<br>.xxxx ±0.03<br>ANGULA ±1° |  |                                                                      | PART NO. | WP-18M2-11-11                 | DWG NO. | QC7885 | VERSION<br>B |