

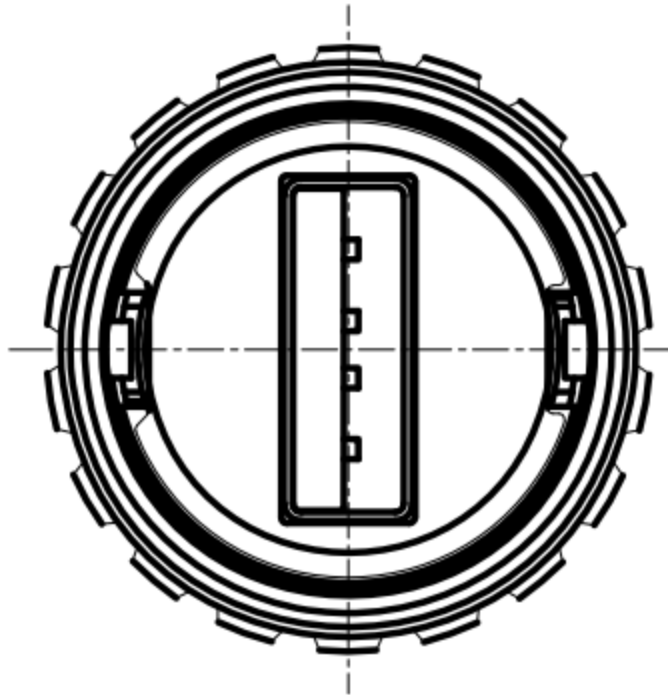


# CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Yeh Chou	2016/08/31	
B				
C				

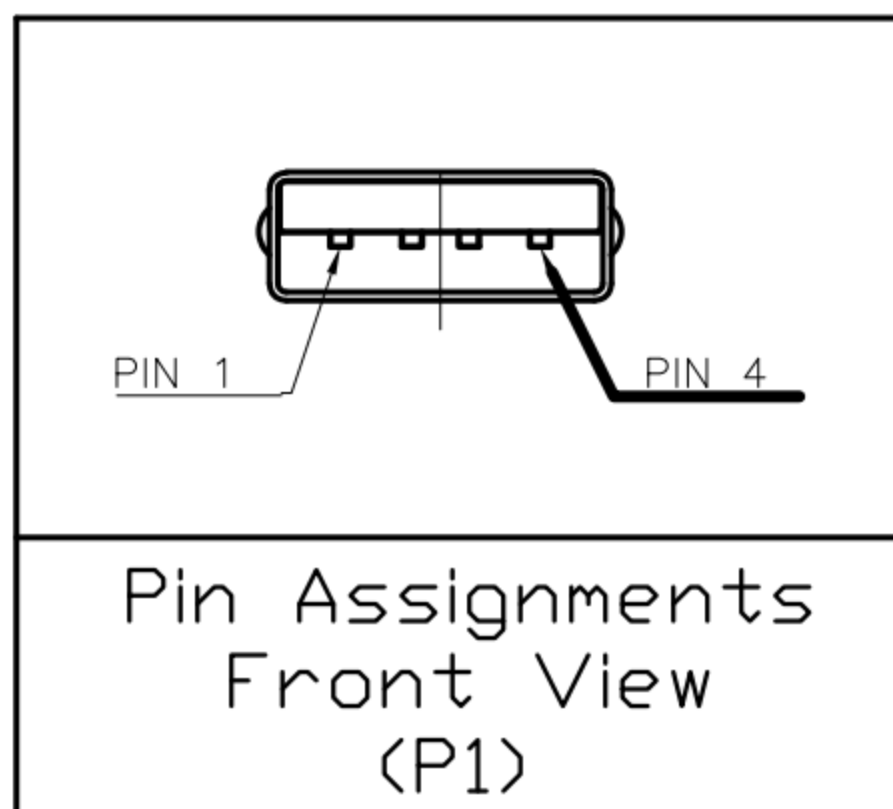

P1

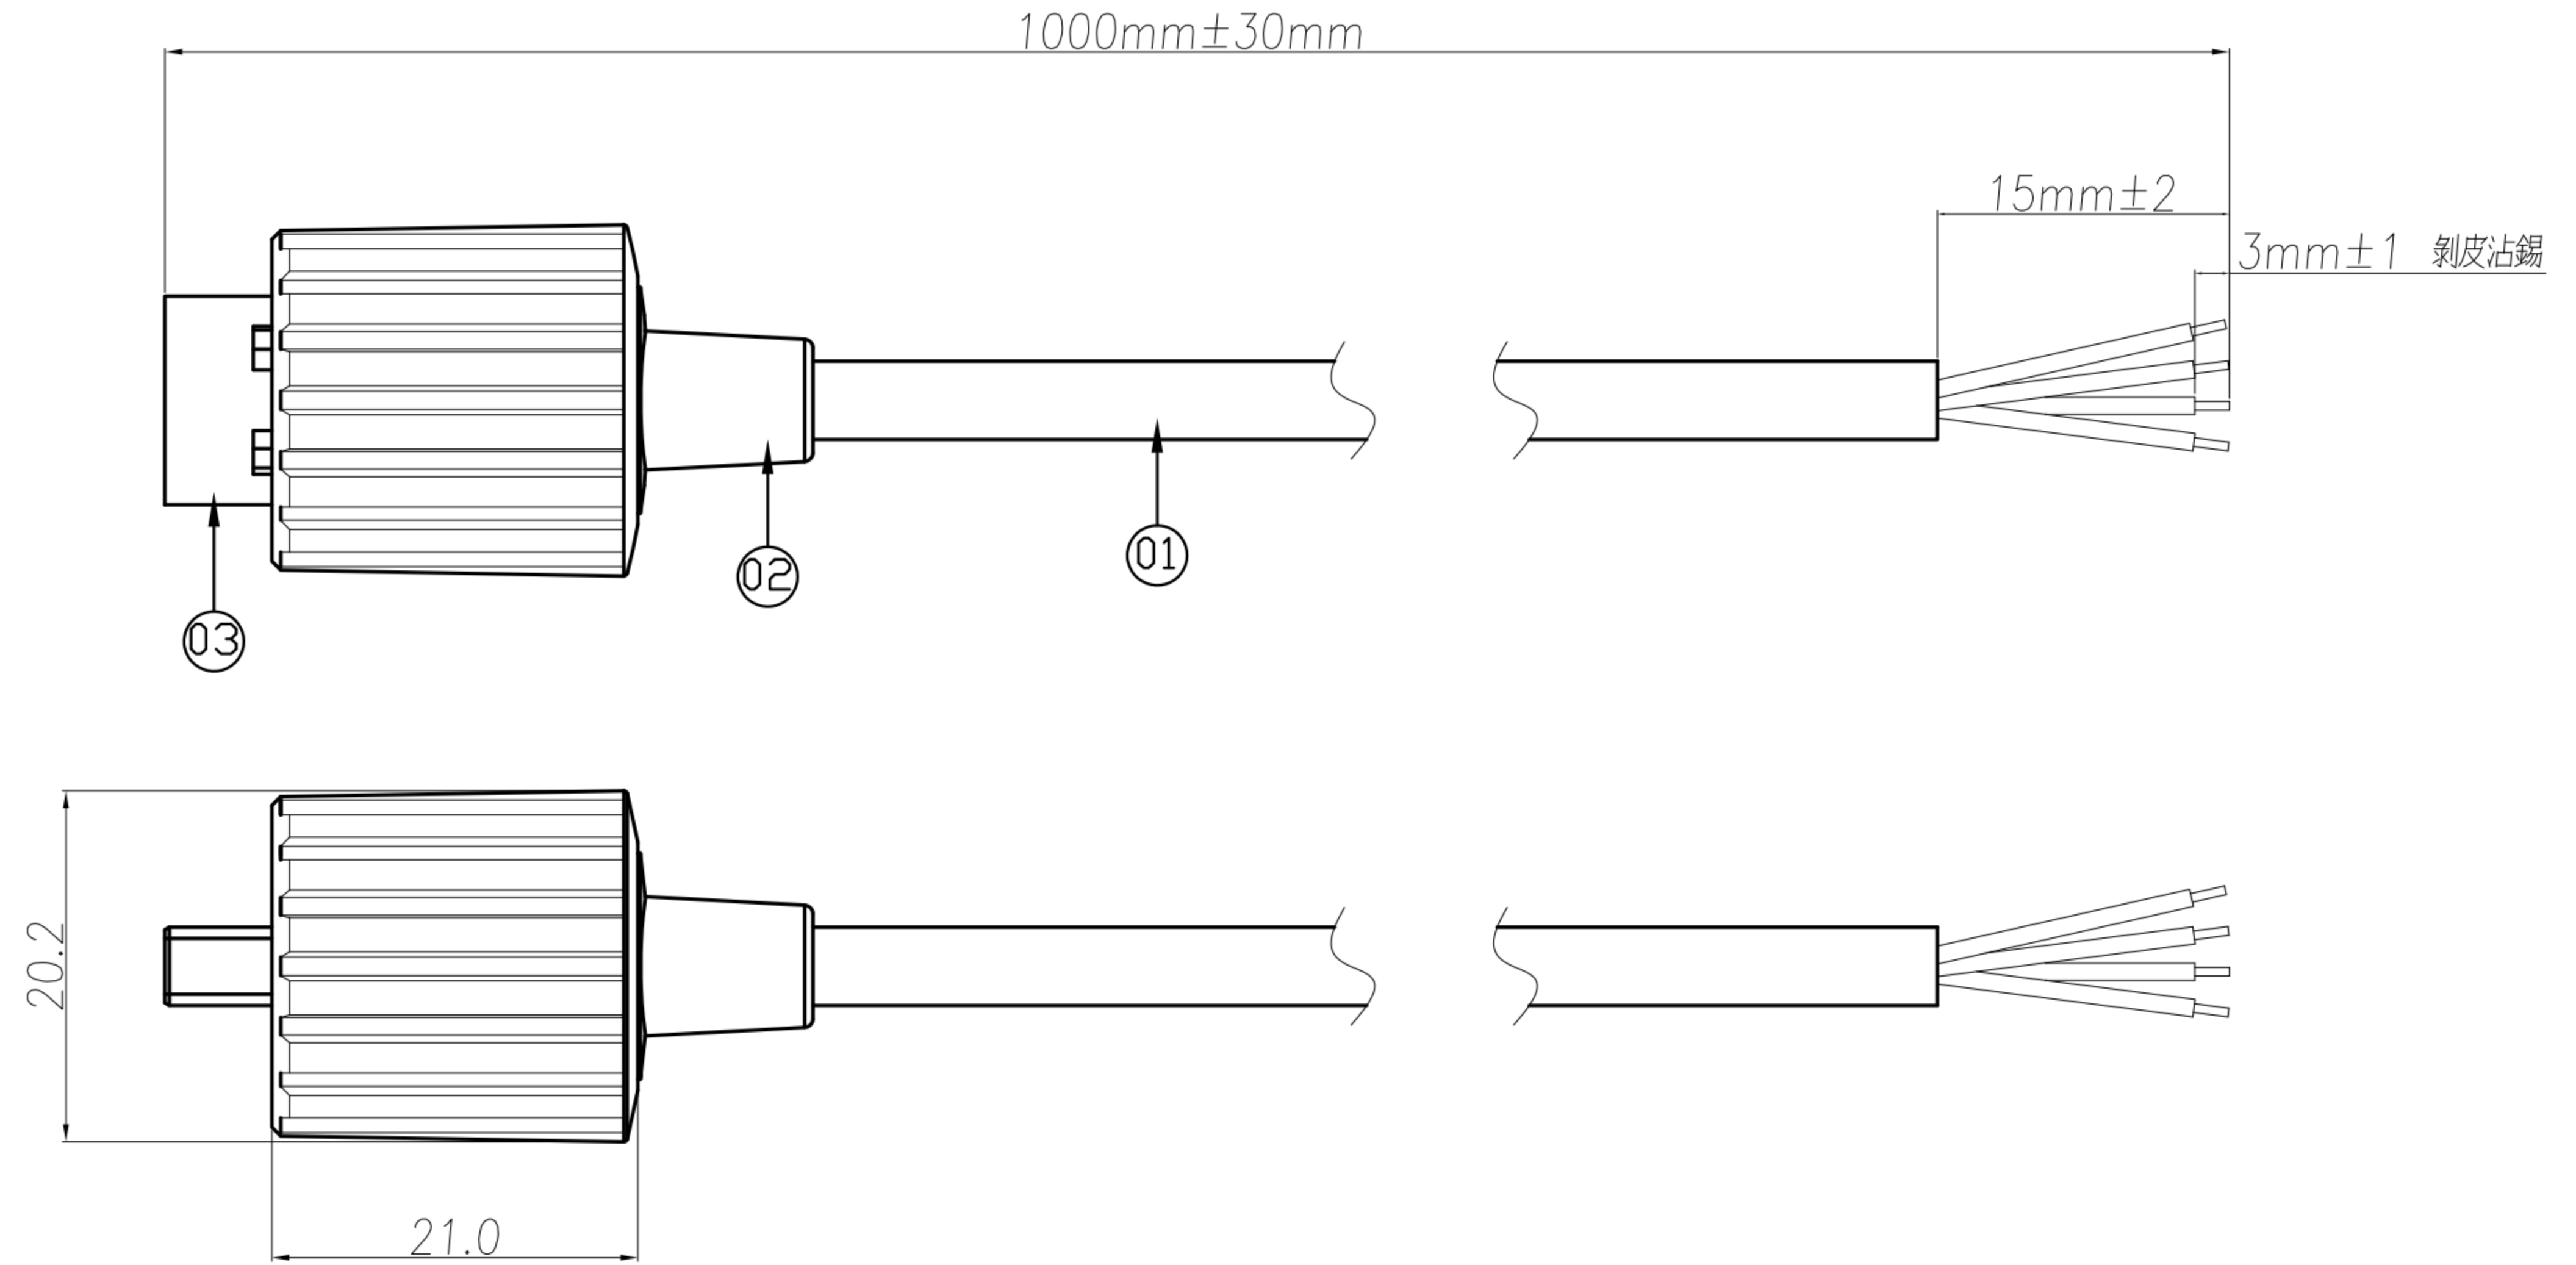

## NOTE

### ELECTRICIL CHARACTER

- INSULATION RESISTANCE : 100M ohm(MIN)
- CONTACT RESISTANCE : 50m ohm(MAX)
- RATED VOLTAGE : 30V AC
- RATED CURRENT : 1.5A
- 100% OPEN & SHORT TESTING

### MECHANICAL CHARACTER

- INSERTION FORCE : 35N
- EXTRACTION FORCE : 10N

ITEM	DESCRIPTION	Q'TY
6	RUBBER 2 ; COLOR : BLACK	1
5	RUBBER 1 ; COLOR : BLACK	1
4	RING ; COLOR : BLACK	1
3	USB (M) A TYPE	1
2	SR : PVC 35P ; COLOR : BLACK	1
1	UL2725 28AWG*1P+24AWG*2C OD:4.5	1

SHELL	SHIELD	DRAIN WIRE
4	GROUND	BLACK
3	+DATA	GREEN
2	-DATA	WHITE
1	VBUS	RED
P1	SIGNAL NAME	WIRE COLOR

WIRE CONNECTION TABLE

DRAWN	Yeh Chou	APP'D	Ku Chou	UNIT	mm	TOLERANCE		TITLE	Waterproof USB CABLE L=1M			SHEET	
CHK'D	Emly Suen			SCALE	1:1	.x ±0.20 .xx ±0.15 .xxx ±0.10 .xxxx ±0.05 ANGULA ±1°			PART NO.	CB-0571-11	DWG NO.	QC7579	VERSION A